LIMOTRIQUE

PUISSANCE // CONTRÔLE // SÉCURITÉ

À VOTRE SERVICE DEPUIS 1995

CATALOGUE 2020

800-921-4400 / 819-564-4410
Fax : 819-564-2227
info@limotrique.com

www.limotrique.com

TABLE DES MATIÈRES

ANCRAGE 7

ANCRE À PLAQUE 7
ANCRAGE À DÉPLOIEMENT 8
TIGE D'ANCRAGE 9
ANCRE À VIS 10
ANCRE POUR LE ROC 12
EXTENSION D'ANCRE POUR LE ROC 12

HAUBANAGE 13

HAUBAN ET FIL D'ATTACHE 13
GRADE 180 EHS 13
GARDE D'HAUBAN 14
ATTACHE PRÉFORMÉE 14
CROCHET D'HAUBAN 15
ATTACHE POUR HAUBAN DE TROTTOIR 16

QUINCAILLERIE 17

BOULON DE CAROSSERIE 3/8'' 17
BOULON À ŒIL OBLIQUE 18
BOULON D'ESPACEMENT 18
BOULON MÉCANIQUE 19
BOULON À ŒIL 21
BOULON À ŒIL À ÉPAULEMENT 22
ÉCROU ET RONDELLE 23
RONDELLE CARRÉE 26
ÉCROU À ŒIL 27
ÉCROU À CHAPE 27
TIRE-FOND (LAG SCREW) 28
ENTRETOISE 29
PLAQUE POUR TRAVERSE 30
CHEVILLE DE TRAVERSE 31
CHEVILLE DE TRAVERSE (ROBUSTE) 32
CHEVILLE DE TÊTE 33
PLAQUE, ÉCHELON ET CROCHET 34
PROTÈGE CÂBLE GALVANISÉ DROIT 35
PROTÈGE CÂBLE GALVANISÉ ÉVASÉ 35

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

SANGLE POUR PROTÈGE CÂBLE 36
PROTÈGE BUTOIR 37
ATTACHE FIL 38
SUPPORT EN 'L' 39
SUPPORT D'ÉQUIPEMENT 40
SUPPORT POUR TRANSFORMATEUR 41
SUPPORT POUR TRANSFORMATEUR TRIPLE 42
SUPPORT À ISOLATEUR 43
SÉPARATEUR DE CÂBLE ET BOULON À ISOLATEUR 44
PINCE DE SERVICE EN ALUMINIUM (WEDGE) 45
PINCE DE DÉRIVATION 46
PINCE D'AMARRAGE 48
MANCHON AUTOMATIQUE 51
CONNECTEUR PARALLÈLE 52
ÉQUIVALENCE DE CONNECTEUR PARALLÈLE 54
POTEAU ET TRAVERSE DE BOIS TRAITÉ 56
PRODUITS DE FIBRE DE VERRE 57
TIGE D'HAUBAN EN FIBRE DE VERRE 59
TRAVERSE DE FIBRE 60
ÉQUIPEMENT DE PROTECTION 63
PARAFOUDRE SECONDAIRE 63
PARAFOUDRE DE DISTRIBUTION EN POLYMÈRE 64
PARAFOUDRE INTERMÉDIAIRE EN POLYMÈRE 65
PARAFOUDRE STATION EN POLYMÈRE 66
COUPE-CIRCUIT 67
ÉLÉMENT FUSIBLE (FUSELINK) 69
COUDÉES ET ACCESSOIRES 15/25/35 kV 70
RÉENCLENCHEUR ET SECTIONNEUR 71
TRANSFORMATEUR 72
ISOLATEURS 73
ISOLATEUR D'ANCRAGE 73
ISOLATEUR BOBINE 74
ISOLATEUR À TIGE 75
ISOLATEUR DE SUSPENSION 77
ISOLATEUR CAPOT-EMBASE 79
ISOLATEUR DE POSTE 81

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ISOLATEURS TR 86
ISOLATEUR EN POLYMÈRE 87
ISOLATEUR EN POLYMÈRE VISE-TOP 15/25 kV 88
ISOLATEUR EN POLYMÈRE VISE-TOP 35 kV 89
ISOLATEUR FIN DE COURSE EN POLYMÈRE 90
ISOLATEUR EN POLYMÈRE OU SILICONE 91
ISOLATEUR DE POSTE EN POLYMÈRE 92
ISOLATEUR DE SUSPENSION POUR X-FO (ANTISISMIQUE) 94
MISE À LA TERRE 95
TIGE 95
RACCORD 96
BOÎTE D'ÉLECTRODE 98
MOULURE POUR FILS DE M.A.L.T. 99
CRAMPON DE FIXATION 99
CRAMPON ANTI-RECUL 100
TAPIS DE M.A.L.T. 101
TIGE TEMPORAIRE 101
POINT FIXE 102
ENSEMBLE SIMPLE PHASE 103
ENSEMBLE TRIPHASÉ 104
MANCHON ET GOUGEON 105
CÂBLE DE M.A.L.T. 106
PINCE DE M.A.L.T. 107
ACCESSOIRES DE M.A.L.T. 110
TERMINAISON DE CÂBLE À FROID (COLD SHRINK) 116
CONNECTEURS 117
CONNECTEUR HAUTE ET MOYENNE TENSION 117
CONNECTEUR À COMPRESSION 127
CELLULES PHOTOÉLECTRIQUES ET CONTRÔLE D'ÉCLAIRAGE 131
CELLULE PHOTOÉLECTRIQUE SÉRIE FP 132
CELLULE PHOTOÉLECTRIQUE SÉRIE 7700 133
CELLULE PHOTOÉLECTRIQUE SÉRIE TRS (LED) 134
CAPUCHON DE COURT-CIRCUIT 135
CELLULE PHOTOÉLECTRIQUE FA ET B 136
CELLULE PHOTOÉLECTRIQUE FT ET SFT 137
BASE DE CELLULE PHOTOÉLECTRIQUE 138

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

CONTRÔLE 139
CONTRÔLE DE MOTEUR 139
INTERRUPTEUR AU PIED 141
CONTRÔLE DE TEMPÉRATURE 142
ÉQUIPEMENT DE PROTECTION INDIVIDUELLE (E.P.I.) 143
ENSEMBLES ARC-FLASH 146
ENSEMBLES DE GANTS 147
ACCESSOIRES DE PROTECTION 148
VÊTEMENTS DE PROTECTION ARC-FLASH 149
LONGE ET HARNAIS ANTI-CHUTE 150
ACCESSOIRES DE SÉCURITÉ 151
FANION 151
RUBAN ET DÉVIDOIR 152
ÉCARTEUR ET FLÉCHETTE 153
PANNEAU À OUTILS POUR NACELLE 154
ŒIL DE TIRAGE 154
PROTECTEUR DE LIGNE ET CAPOT D'ISOLATEUR 155
PROTECTEUR DE LIGNE RIGIDE 157
PROTECTEUR DE TRAVERSE ET POTEAU 158
PROTECTEUR DE LIGNE SOUPLE 159
COUVERTURE ISOLANTE 161
ACCESSOIRES DE COUVERTURE ISOLANTE 162
TOILE ISOLANTE ET ACCESSOIRES 163
PERCHES VIVITECHNIQUES 165
PERCHE TÉLESCOPIQUE TRIANGULAIRE 165
PERCHE TÉLESCOPIQUE RONDE 166
PERCHE TÉLESCOPIQUE GRADUÉE 168
PERCHE DE MESURAGE 169
PERCHE FIXE ISOLÉE 170
PERCHE DE MANUTENTION 172
PERCHE DE MANUTENTION SECTIONNELLE 173
ACCESSOIRES POUR L'ÉMONDAGE 174
AUTRES ACCESSOIRES POUR PERCHES 175
OUTILS ET ACCESSOIRES 176
PLATEAUX D'OUTILS POUR NACELLE 176
POULIE DE LIGNE MANUELLE 177

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

POULIE DE TIRAGE 178
PINCE DE TIRAGE 180
DÉTECTEUR DE TENSION 181
SUPPORTS DIVERS 182
SERVICE DE LABORATOIRE HAUT VOLTAGE 183

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ANCRE À PLAQUE

NUMÉRO	GRANDEUR DU TROU (CM)	SURFACE PC^2 (CM^2)	POUR TIGE (CM) (COMMANDÉE SÉPARÉMENT)	POIDS LBS (KG)
J3516	16 (41)	150 (967)	5/8 ou 3/4 (1.6 or 1.9)	10 (4.5)
J3520	20 (51)	250 (1613)	5/8 ou 3/4 (1.6 ou 1.9)	16 (7.3)
J3520-1	20 (51)	250 (1613)	1 (2.5)	16 (7.3)
J35A24-3/4	24 (61)	400 (2580)	5/8 ou 3/4 (1.6 ou 1.9)	33 (15)
J3524	24 (61)	400 (2580)	1 (2.5)	33 (15)
J3524-1	24 (61)	400 (2580)	1-1/4 (3.2)	33 (15)
62400	20 (51)	400 (2580)	1 et 1-1/4	33 (15)
P900PHQ	30 (76.2)	762 (4852)	1-1/4 (3.2)	36 (15)

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ANCRAGE À DÉPLOIEMENT

CLOSED
FERMÉE

EXPANDED
OUVERTE

NUMÉRO	GRANDEUR DU TROU (CM)	SURFACE PC^2 (CM^2)	POUR TIGE (CM) (COMMANDÉE SÉPARÉMENT)	POIDS LBS (KG)
J0870	6 (15.2)	70 (452)	5/8 (1.6)	5 (2.3)
J8115	8 (20.3)	115 (742)	5/8 ou 3/4 (1.6 ou 1.9)	9 (4.1)
J8135	8 (20.3)	135 (871)	5/8 ou 3/4 (1.6 ou 1.9)	9 (4.1)
J8135-1	8 (20.3)	135 (871)	1 (2.5)	9 (4.1)
J8200-1	10 (25.4)	200 (1290)	1 (2.5)	18 (8.2)
J8200-3/4	10 (25.4)	200 (1290)	5/8 ou 3/4 (1.6 ou 1.9)	18 (8.2)
J0283	12 (30.5)	300 (1935)	1-1/4 (3.2)	29 (13.2)
J0283-1	12 (30.5)	300 (1935)	1 (2.5)	29 (13.2)

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

TIGE D'ANCRAGE

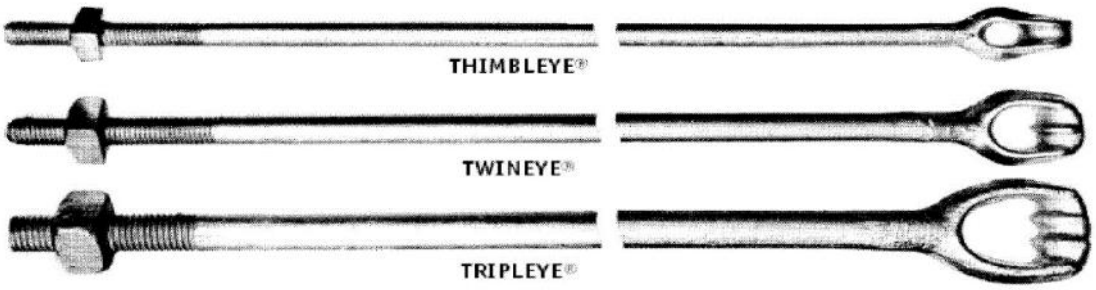

DIAMÈTRE DE LA TIGE (PO)	CAPACITÉ DE LA TIGE (LBS)	LONGUEUR DE LA TIGE (PIEDS)	THIMBLEYE 1 COSSE	TWINEYE 2 COSSES	TRIPLEYE 3 COSSES
			NUMÉRO	NUMÉRO	NUMÉRO
5/8	16 000	5	J7415		
		6	J7416	J7516	
		7	J7417	J7517	
		8	J7418	J7518	
3/4	23 000	7	J7427	J7527	J7327
		8	J7428	J7528	J7328
		9	J7429	J7529	J7329
		10	J7430	J7530	
1	36 000	8		J7538	J7338
		10		J7540	J7340
1-1/4	58 000	10			J7350

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ANCRE À VIS

NUMÉRO	DIAMÈTRE DE LA VIS (CM)	DIAMÈTRE DE LA TIGE (CM)	LONGUEUR DE LA TIGE (CM)	POIDS LBS (KG)
J6524WCA	4 (10.2)	3/4 (1.9)	54 (137.2)	8.1 (3.7)
J6526WCA	6 (15.2)	3/4 (1.9)	66 (167.6)	10.9 (4.9)
J6528WCA	8 (20.3)	1 (2.5)	66 (167.6)	19.1 (8.7)
J6530WCA	10 (25.4)	1-1/4 (3.2)	66 (167.6)	30.3 (13.7)
J6550WCA	10 (25.4)	1-1/4 (3.2)	96 (243.8)	41.1 (18.6)
J6584WCA	14 (35.6)	1-1/4 (3.2)	96 (243.8)	47.6 (21.3)
J6585WCA	15 (38.1)	1-1/4 (3.2)	96 (243.8)	52 (23.6)

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

JAMBE DE FORCE POUR LE ROC



NUMÉRO	DESCRIPTION

POTEAUX DE DISTRIBUTION	INCLINÉE
9UT	Jambe de force inclinée
9T3	Patron de perçage 3 jambes
9T4	Patron de perçage 4 jambes
9T5	Patron de perçage 5 jambes

POTEAUX DE DISTRIBUTION	DROITE
9VM	Jambe de force droite
9VT3	Patron de perçage 3 jambes
9VT4	Patron de perçage 4 jambes
9VT5	Patron de perçage 5 jambes

POTEAUX DE TRANSPORT	INCLINÉE
12UT	Jambe de force inclinée
12T4	Patron de perçage 4 jambes
12T5	Patron de perçage 5 jambes
12T6	Patron de perçage 6 jambes

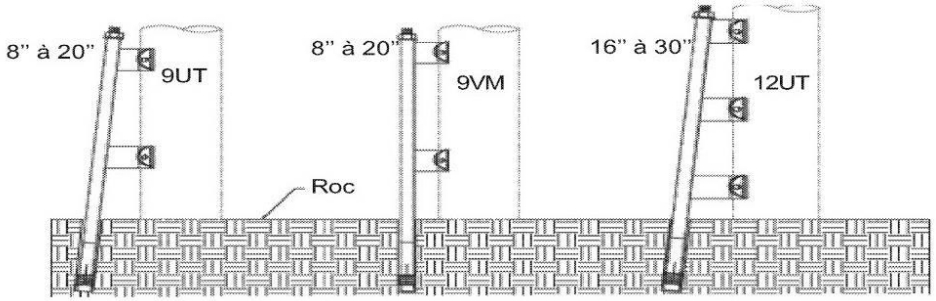



(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ANCRAGE

ANCRE POUR LE ROC

*

NUMÉRO	DIAMÈTRE DE LA TIGE (CM)	LONGUEUR DE LA TIGE (CM)	ANCRE FERMÉE (CM)	ANCRE OUVERTE (CM)	POIDS LBS (KG)
J3436	3/4 (1.9)	15 (38)	1-3/4 (4.5)	2-3/8 (6)	5 (2.3)
J3437	3/4 (1.9)	30 (76)	1-3/4 (4.5)	2-3/8 (6)	7 (3.2)
J3438	3/4 (1.9)	53 (135)	1-3/4 (4.5)	2-3/8 (6)	10 (4.5)
JR360	3/4 (1.9)	60 (152)	1-3/4 (4.5)	2-3/8 (6)	11 (5)
JR372	3/4 (1.9)	72 (183)	1-3/4 (4.5)	2-3/8 (6)	12 (5.4)
JR384	3/4 (1.9)	84 (213)	1-3/4 (4.5)	2-3/8 (6)	13 (5.9)
JR396	3/4 (1.9)	96 (244)	1-3/4 (4.5)	2-3/8 (6)	15 (6.8)
JR130L	1 (2.5)	30 (76)	2-1/4 (5.7)	3-1/8 (7.9)	14 (6.4)
JR153L	1 (2.5)	53 (135)	2-1/4 (5.7)	3-1/8 (7.9)	18 (8.2)
JR172L	1 (2.5)	72 (183)	2-1/4 (5.7)	3-1/8 (7.9)	24 (10.9)
JR196L	1 (2.5)	96 (244)	2-1/4 (5.7)	3-1/8 (7.9)	29 (13.2)
K161-12*	1 (2.5)	12 (30)			3 (1.3)
K161-18*	1 (2.5)	18 (45)			5 (2.2)

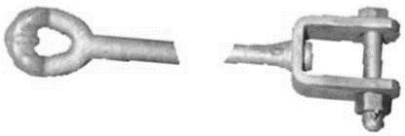

EXTENSION D'ANCRE POUR LE ROC

NUMÉRO	DIAMÈTRE DE LA TIGE (CM)	LONGUEUR DE LA TIGE (CM)	POIDS LBS (KG)
K160-1	5/8 (1.6)	36 (91.4)	5.0 (2.2)
K160-2	3/4 (1.9)	36 (91.4)	7,5 (3.4)
K160-3	3/4 (1.9)	48 (122)	8,5 (3.8)
K160-4	3/4 (1.9)	60 (152.4)	10 (4.5)

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

HAUBAN ET FIL D'ATTACHE
GRADE 180 EHS

NUMÉRO	DIAMÈTRE	CAPACITÉ (LBS)	POIDS 1000' LBS
53184	1/4	6650	121
53243	5/16	11200	205
53333	3/8	15400	273
50385	7/16	20800	399
50391	1/2	26900	517

DISPONIBLE EN :

- ✓ GLAINE (COIL) DE 250' ET 500'
- ✓ BOBINE DE 1000', 2500' ET 5000'
  AUTRES LONGUEURS DISPONIBLES SUR DEMANDE

FIL D'ATTACHE (TIE WIRE)

ALUMINIUM

NUMÉRO	GROSSEUR DE FIL	LONGUEUR DU ROULEAU (MÈTRES)
TIEWIRE#4	#4 AWG	425
TIEWIRE #6	#6 AWG	425

DISPONIBLE EN LONGUEUR DE 198M

FIL HÉLICE DE SUPPORT (LASHING WIRE)

ACIER INOXYDABLE

NUMÉRO	DIAMÈTRE DU FIL (PO)	LONGUEUR DU ROULEAU (PIEDS)
LASH045S	0,045	1200

2609010 PINCE POUR FIL HÉLICE

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

GARDE D'HAUBAN
POLYÉTHYÈNE / 1 ATTACHE BOULONNÉE

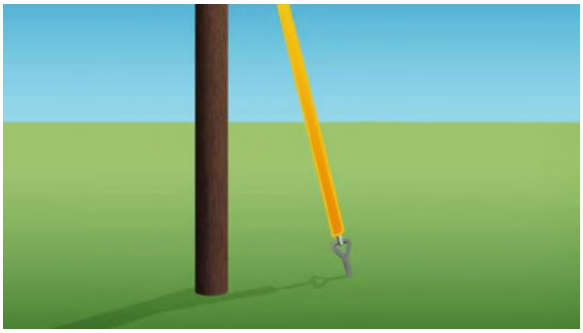

NUMÉRO	DIAMÈTRE	LONGUEUR	COULEUR
2507YS	1-3/4''	84''	Jaune
2507GS	1-3/4''	84''	Vert
RMYGG-U-2M	2-1/4''	84''	Jaune
RNGNGG-U-2M	2-1/4''	84''	Vert

ATTACHE PRÉFORMÉE

NUMÉRO	DIAMÈTRE DU CÂBLE	LONGUEUR	COULEUR
1/4-25-GNA	1/4''	25''	Jaune
5/16-30-GNA	5/16''	31''	Noir
3/8-35-GNA	3/8''	35''	Orange
7/16-38-GNA	7/16''	38''	Vert
1/2-45-GNA	1/2''	39''	Bleu

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

CROCHET D'HAUBAN

CROCHET À HAUBAN

NUMÉRO	DIAMÈTRE DU TROU DE FIXATION (PO)	GRANDEUR OUVERTURE DE FIXATION (PO)	CAPACITÉ À 45° (LBS)
P133AX	-	13/16 x 1	20 050
P134AXW	-	13/16 x 7/8	20 050
P134BX	-	13/16 x 15/16	20 050
P135AXW	-	11/16 x 3/4	13 550
P151X	11/16	-	13 550
P152X	13/16	-	20 050
P157X	13/16	-	20 050
P132X	-	15/16 x 1	27 700
P138	15/16	-	27 700

P133AX

P152X

P134AXW
P134BX

P157X

P135AXW

P132X

P151X

P138

CROCHET COMBINÉ POUR TIGE D'HAUBAN ISOLÉE OU FIL D'HAUBAN

NUMÉRO	DIAMÈTRE HAUBAN (PO)	CAPACITÉ MAXIMALE	DIMENSIONS (PO)			
			A	B	C	D
UGA-65-3	7/16	15 000	3	13/16	11/16	11/16
UGA-66-4	1/2	21 000	4	13/16	13/16	13/16
UGA-66-6	9/16	35 000	6	13/16	13/16	15/16
UGA-77-6	9/16	35 000	6	15/16	15/16	15/16
UGA-77-7	9/16	35 000	6	15/16	15/16	15/16
UGA-77-9	9/16	35 000	6	15/16	15/16	1 3/16
UGA-88-8	9/16	35 000	6	1 1/16	1 1/16	1 1/16

UGA

Galvanisé à chaud ASTM 123

Pour surfaces planes ou rondes

Pour tiges d'hauban isolées en fibre de verre standards





(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ATTACHE POUR HAUBAN DE TROTTOIR



J1501



J1502



J0521



J0522

ATTACHE POUR HAUBAN DE TROTTOIR
GALVANISÉE À CHAUD

NUMÉRO	DESCRIPTION	GROSSEUR DU CONDUIT
J1501	Plaque au poteau	2''
J1502	Embout	2''
J0521	Plaque au poteau	2'' et 2-1/2''
J0522	Embout	2'' et 2-1/2''

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

BOULON DE CAROSSERIE 3/8''

BOULON D'ENTRETOISE – GALVANISÉ À CHAUD

Capacité de 4650 lbs

NUMÉRO	DIMENSIONS (PO)	LONGUEUR DES FILETS (PO)
J8624-1/2	3/8 x 4-1/2	2

BOULON DE CARROSSERIE – GALVANISÉ À CHAUD

NUMÉRO	DIMENSIONS (PO)	LONGUEUR DES FILETS (PO)
J8634	4	3
J8634-1/2	4 ½	3
J8635	5	3
J8635-1/2	5 ½	3
J8636	6	3
J8637	7	4
J8638	8	4
J8640	10	4

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

BOULON À ŒIL OBLIQUE

DROIT

ANGLE

BOULON THIMBLEYE GALVANISÉ À CHAUD

ANGLE NUMÉRO	DROIT NUMÉRO	DIAMÈTRE DU BOULON (PO)	LONGUEUR DU BOULON (PO)	LONGUEUR DES FILETS (PO)
J8050	J8150	5/8	8	4
J8051	J8151	5/8	10	4
J8052	J8152	5/8	12	6
J8053	J8153	5/8	14	6
J8054	J8154	5/8	16	6
J8055		5/8	18	6
	J8161	3/4	10	4
J8062	J8162	3/4	12	6
J8063	J8163	3/4	14	6

BOULON D'ESPACEMENT

BOULON D'ESPACEMENT GALVANISÉ À CHAUD
5/8 de diamètre, capacité de 13 550 lbs

NUMÉRO	LONGUEUR DU BOULON (PO)
J8860	10
J8862	12
J8864	14
J8866	16
J8868	18
J8870	20
J8872	22
J8874	24
J8876	26
J8877	28
J8878	30
J8879	32
J8880	34
J8881	36

BOULON D'ESPACEMENT GALVANISÉ À CHAUD
3/4 de diamètre, capacité de 20 050 lbs

NUMÉRO	LONGUEUR DU BOULON (PO)
J8882	12
J8884	14
J8886	16
J8888	18
J8890	20
J8892	22
J8894	24
J8896	26
J8897	28
J8898	30
J8899	32
J9003	34
J9004	36

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

BOULON MÉCANIQUE

BOULON MÉCANIQUE – TÊTE ET ÉCROU CARRÉ GALVANISÉ À CHAUD
3/8'' de diamètre, capacité de 4 650 lbs

NUMÉRO	LONGUEUR DU BOULON (PO)	LONGUEUR DES FILETS (PO)
J8602	2	1-3/4
J8603	3	2-3/4
J8604	4	3
J8604-1/2	4-1/2	3
J8605	5	3
J8606	6	3
J8607	7	4
J8608	8	4
J8610	10	4

BOULON MÉCANIQUE – TÊTE ET ÉCROU CARRÉ GALVANISÉ À CHAUD
1/2'' de diamètre, capacité de 8 500 lbs

NUMÉRO	LONGUEUR DU BOULON (PO)	LONGUEUR DES FILETS (PO)
J8701-1/2	1-1/2	1-1/4
J8702	2	1-3/4
J8702-1/2	2-1/2	2-1/4
J8703	3	2-3/4
J8704	4	3
J8705	5	3
J8706	6	3
J8707	7	4
J8708	8	4
J8709	9	4
J8710	10	6
J8712	12	6
J8714	14	6
J8716	16	6

BOULON MÉCANIQUE – TÊTE ET ÉCROU CARRÉ GALVANISÉ À CHAUD
5/8'' de diamètre, capacité de 13 550 lbs

NUMÉRO	LONGUEUR DU BOULON (PO)	LONGUEUR DES FILETS (PO)
J8801-1/2	1-1/2	1-1/4
J8802	2	1-3/4
J8802-1/2	2-1/2	2-1/4
J8803	3	2-3/4
J8804	4	3
J8805	5	3
J8806	6	3
J8807	7	4
J8808	8	4
J8809	9	4
J8810	10	6
J8812	12	6
J8814	14	6
J8816	16	6
J8818	18	6
J8820	20	6
J8822	22	6
J8824	24	6
J8826	26	6
J8828	28	6

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

BOULON MÉCANIQUE (suite)

BOULON MÉCANIQUE – TÊTE ET ÉCROU CARRÉ GALVANISÉ À CHAUD
3/4'' de diamètre, capacité de 20 050 lbs

NUMÉRO	LONGUEUR DU BOULON (PO)	LONGUEUR DES FILETS (PO)
J8902	2	1-3/4
J8903	3	1-3/4
J8906	6	4
J8908	8	4
J8910	10	6
J8912	12	6
J8914	14	6
J8916	16	6
J8918	18	6
J8920	20	6
J8922	22	6
J8924	24	6
J8926	26	6
J8928	28	6

BOULON MÉCANIQUE – TÊTE ET ÉCROU CARRÉ GALVANISÉ À CHAUD
7/8'' de diamètre, capacité de 27 700 lbs

NUMÉRO	LONGUEUR DU BOULON (PO)	LONGUEUR DES FILETS (PO)
J9062	12	6
J9064	14	6
J9066	16	6
J9068	18	6
J9070	20	6
J9072	22	6
J9074	24	6

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

BOULON À ŒIL



BOULON D'ESPACEMENT À ŒIL –
TÊTE ET ÉCROUS CARRÉS
GALVANISÉ À CHAUD
5/8'' de diamètre, capacité de 13 550 lbs

NUMÉRO	LONGUEUR DU BOULON (PO)	LONGUEUR DES FILETS (PO)
J9614	14	12
J9616	16	14
J9618	18	16
J9620	20	18
J9622	22	20
J9624	24	22
J9626	26	24

BOULON D'ESPACEMENT À ŒIL –
TÊTE ET ÉCROUS CARRÉS
GALVANISÉ À CHAUD
3/4'' de diamètre, capacité de 20 050 lbs

NUMÉRO	LONGUEUR DU BOULON (PO)	LONGUEUR DES FILETS (PO)
J9636	16	14
J9638	18	16
J9640	20	18
J9642	22	20
J9644	24	22
J9646	26	24

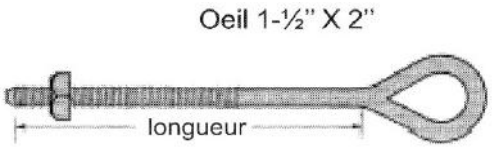

BOULON D'ESPACEMENT À ŒIL –
TÊTE ET ÉCROU CARRÉ
GALVANISÉ À CHAUD
5/8'' de diamètre, capacité de 13 550 lb

NUMÉRO	LONGUEUR DU BOULON (PO)	LONGUEUR DES FILETS (PO)
J9406	6	4
J9408	8	4
J9409	9	4
J9410	10	6
J9412	12	6
J9414	14	6
J9416	16	6
J9418	18	6
J9420	20	6

BOULON D'ESPACEMENT À ŒIL –
TÊTE ET ÉCROU CARRÉ
GALVANISÉ À CHAUD
3/4'' de diamètre, capacité de 20 050 lbs

NUMÉRO	LONGUEUR DU BOULON (PO)	LONGUEUR DES FILETS (PO)
J9508	8	4
J9510	10	6
J9512	12	6
J9514	14	6
J9516	16	6
J9518	18	6

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

BOULON À ŒIL À ÉPAULEMENT

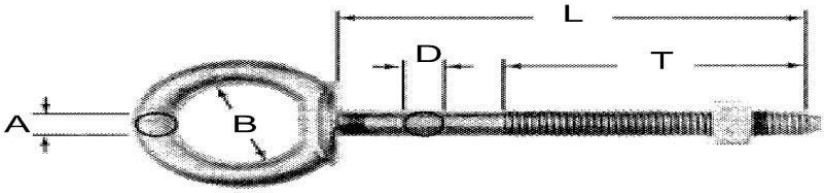

NUMÉRO	DIAMÈTRE (D)	LONGUEUR (L)	LONGUEUR (T)	DIAMÈTRE TIGE (A)	DIAMÈTRE OEIL (B)	POIDS/100 (LBS)
J9528	3/4	8	4	11/16	1-13/16	216
J9530	3/4	10	6	11/16	1-13/16	221
J9532	3/4	12	6	11/16	1-13/16	248
J9534	3/4	14	6	11/16	1-13/16	280
J9536	3/4	16	6	11/16	1-13/16	320
J9538	3/4	18	6	11/16	1-13/16	340
J9540	3/4	20	6	11/16	1-13/16	365

VIS À ŒIL – GALVANISÉE À CHAUD

NUMÉRO	DIAMÈTRE DE LA VIS (PO)
J8930	1/2''

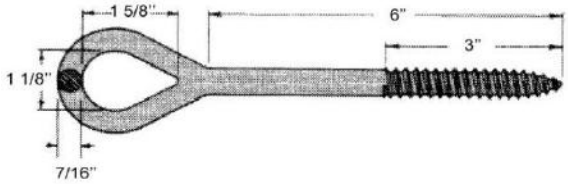

BOULON CHAPE – GALVANISÉ À CHAUD

NUMÉRO	A	L
	DIAMÈTRE (PO)	LONGUEUR (PO)
J7810	5/8	10
J7812	5/8	12
J7814	5/8	14

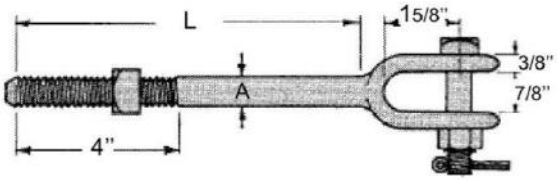

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ÉCROU ET RONDELLE



ÉCROU HEXAGONAL
GALVANISÉ À CHAUD

NUMÉRO	POUR BOULONS (PO)
NG000250	1/4
NG000375	3/8
NG000500	1/2
NG000625	5/8
NG000750	3/4
NG000875	7/8

ÉCROU HEXAGONAL
ACIER INOXYDABLE (STAINLESS)

NUMÉRO	POUR BOULONS (PO)
NS100250	1/4
NS100375	3/8
NS100500	1/2
NS100625	5/8
NS100750	3/4
NS100875	7/8

ÉCROU HEXAGONAL
BRONZE SILICIUM

NUMÉRO	POUR BOULONS (PO)
NB000250	1/4
NB000375	3/8
NB000500	1/2
NB000625	5/8
NB000750	3/4



ÉCROU CARRÉ
GALVANISÉ
Pour les boulons seulement

NUMÉRO	POUR BOULONS (PO)
J8561	3/8 - 16
J8562	1/2 - 13
J8563	5/8 - 11
J8564	3/4 - 10
J8564-1/2	7/8 - 9

ÉCROU CARRÉ ROBUSTE
GALVANISÉ
Pour les tiges d'ancrage seulement

NUMÉRO	POUR BOULONS (PO)
J8563-1	5/8
J8564-1	3/4
J8565-1	1
J8566	1-1/4

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ÉCROU ET RONDELLE (suite)

ÉCROU FREIN
GALVANISÉ À CHAUD

NUMÉRO	DESCRIPTION
J8581	3/8'' Carré
J8582	1/2'' Carré
J8583	5/8'' Carré
J8584	3/4'' Carré
J8584-1/2	7/8'' Carré
J8585	1'' Carré
J8582H	1/2'' Hexagone
J8583H	5/8'' Hexagone
J8584H	3/4'' Hexagone







RONDELLE PLATE
GALVANISÉE À CHAUD

NUMÉRO	POUR BOULONS (PO)
WG000250	1/4
J1084	3/8
J1086	1/2
J1088	5/8
J1089	3/4
WG000875	7/8

RONDELLE PLATE
ACIER INOXYDABLE (STAINLESS)

NUMÉRO	POUR BOULONS (PO)
WS100250	1/4
WS100375	3/8
WS100500	1/2
WS100625	5/8
WS100750	3/4
WS100875	7/8

RONDELLE PLATE
BRONZE SILICIUM

NUMÉRO	POUR BOULONS (PO)
WB100250	1/4
WB100375	3/8
WB100500	1/2
WB100625	5/8
WB100750	3/4

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ÉCROU ET RONDELLE (suite)

ÉCROU À RONDELLE GALVANISÉ À CHAUD

NUMÉRO	DIAMÈTRE INTÉRIEUR (PO)	DIMENSIONS (PO)	
		B	C
J9802	5/8''	2-1/2	1
J9803	3/4''	3	1-1/8

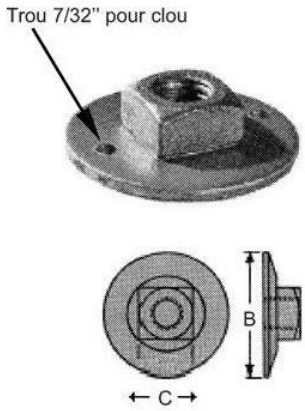

RONDELLE FREIN GALVANISÉE À CHAUD

NUMÉRO	POUR BOULONS (PO)
WM100250	1/4
J134	3/8
J138	1/2
J139	5/8
J140	3/4
WM100875	7/8

RONDELLE FREIN ACIER INOXYDABLE (STAINLESS)

NUMÉRO	POUR BOULONS (PO)
WL600250	1/4
WL600375	3/8
WL600500	1/2
WL600625	5/8
WL600750	3/4
WL600875	7/8

RONDELLE FREIN BRONZE SILICIUM

NUMÉRO	POUR BOULONS (PO)
WM200250	1/4
WM200375	3/8
WM200500	1/2
WM200625	5/8
WM200750	3/4

RONDELLE FREIN À RESSORT DOUBLE GALVANISÉE

NUMÉRO	POUR BOULONS (PO)
J175	3/8
J176	1/2
J177	5/8
J178	3/4

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

RONDELLE CARRÉE



RONDELLE CARRÉE – GALVANISÉE

NUMÉRO	DIMENSIONS (PO)	DIAMÈTRE DU TROU (PO)	POUR BOULON (PO)
J1073	2 x 2 x 1/8	9/16	1/2
J1074	2 x 2 x 1/8	11/16	5/8
J1075	2-1/4 x 2-1/4 x 3/16	11/16	5/8
J1076	2-1/4 x 2-1/4 x 3/16	13/16	3/4
J1078	3 x 3 x 3/16	13/16	3/4
J1079	3 x 3 x 1/4	13/16	3/4
J1080	4 x 4 x 3/16	13/16	3/4
J1082	4 x 4 x 1/4	15/16	3/4 et 7/8
J1081	4 x 4 x 1/2	1-1/8	1

RONDELLE COURBÉE CARRÉE – GALVANISÉE

NUMÉRO	DIMENSIONS (PO)	DIAMÈTRE DU TROU (PO)	POUR BOULON (PO)
J6821	2-1/4 x 2-1/4 x 3/16	11/16	5/8
J6822	2-1/2 x 2-1/2 x 3/16	11/16	5/8
J113	3 x 3 x 1/4	11/16	5/8
J6823	3 x 3 x 1/4	13/16	3/4
J133	3-1/4 x 3-1/4 x 1/4	13/16	3/4
J6828	3-1/2 x 3-1/2 x 3/8	15/16	7/8
J6829	4 x 4 x 1/4	15/16	7/8
J6836	4 x 4 x 1/4	13/16	3/4
J6838	4 x 4 x 3/8	13/16	3/4

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ÉCROU À ŒIL



Fig. 1



Fig. 2



Fig. 3

NUMÉRO	NUMÉRO (2)	FIG.	A	B	C	D	E	F	POUR BOULON (PO)	POIDS/ 100 (LBS)
EN-4		1	1-3/8	9/16	1-1/2	1-3/4	2-5/8	3	1/2	100
J1092	EN-5	1	1-3/8	9/16	1-1/2	1-3/4	2-5/8	3	5/8	72
J1093	EN-6	1	1-3/8	9/16	1-1/2	1-3/4	2-5/8	3	3/4	53
ENL-5		2	1-3/8	5/8	1-1/2	2-1/2	2-5/8	4	5/8	100
ENL-6		2	1-3/8	5/8	1-1/2	2-1/2	2-5/8	4	3/4	100
J6510	TN5	3	1-1/2	1-1/2	7/8	1-3/8	1-7/8	3	5/8	100
J6511	TN-6	3	1-1/2	1-1/2	7/8	1-3/8	1-7/8	3	3/4	91
J16512	D6512	3	2	2	7/8	1-1/2	2	4-1/2	1	200

Notes : Le numéro (2) est discontinué. Remplacé par les numéros de la première colonne.

ÉCROU À CHAPE

CN-5
BOULON : 5/8
TIGE : 5/8

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

TIRE-FOND (LAG SCREW)

-

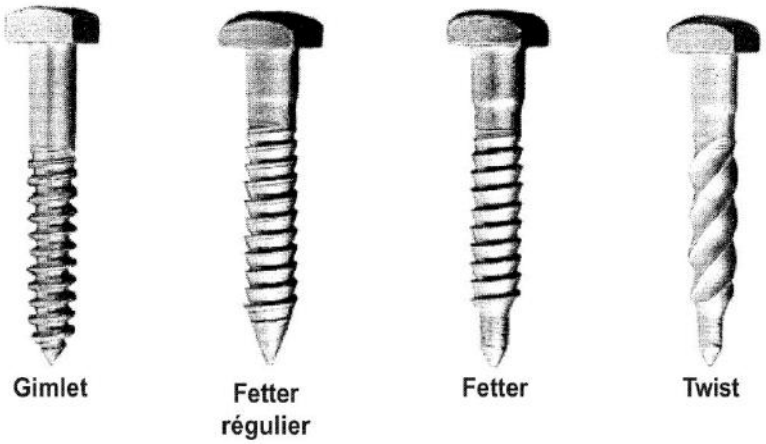

VIS TIRE-FOND GALVANISÉE

GIMLET	FETTER RÉGULIER	FETTER DRIVE	TWIST DRIVE	DIMENSIONS (PO)	LONGUEUR DES FILETS (PO)
J8722	J8652HH*			1/4 x 2	1-1/2
J8722-1/2	J8652-1/2HH*			1/4 x 2-1/2	1-3/4
J8723*				1/4 x 3	2
J8732*				5/16 x 2	1-1/2
J8732-1/2*				5/16 x 2-1/2	1-5/8
	J8742-1/2			3/8 x 2-1/2	1-3/4
J8773	J8743	J8743P		3/8 x 3	2
	J8744	J8744P		3/8 x 4	2-1/2
		J8753P	J8753TP	1/2 x 3	2-1/4
J8784	J8754	J8754P	J8754TP	1/2 x 4	2-5/8
	J8754-1/2	J8754-1/2P		1/2 x 4-1/2	2-5/8
		J8755P		1/2 x 5	3
	J8765			5/8 x 5	3-1/2

* Indique une tête hexagonale

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ENTRETOISE

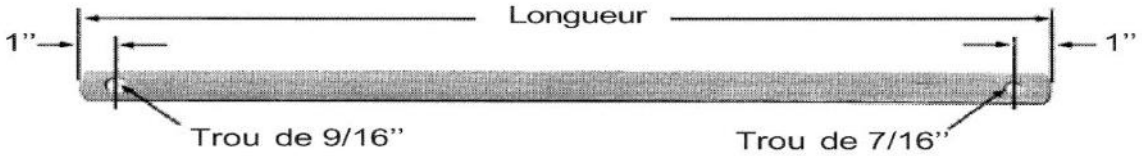

ENTRETOISE PLATE GALVANISÉE À CHAUD

NUMÉRO	LONGUEUR (PO)	DISTANCE CàC DES TROUS (PO)
J7126	26	24
J7128	28	26
J7130	30	28
J7132	32	30
J7136	36	34

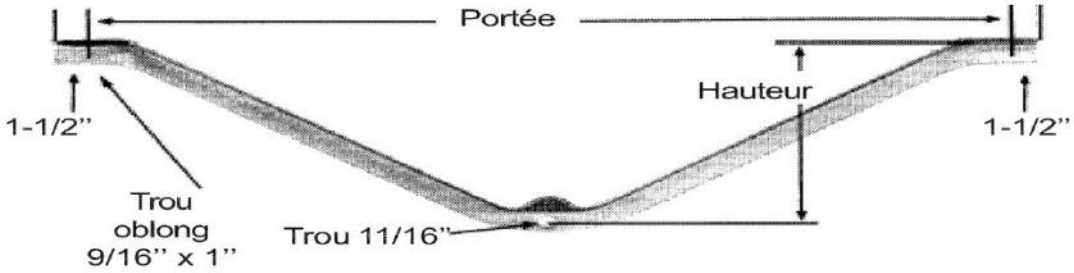

ENTRETOISE ANGULAIRE EN V GALVANISÉE À CHAUD

NUMÉRO	DIMENSIONS DU FER ANGLE (PO)	PORTÉE (PO)	HAUTEUR (PO)
J1506	1-1/2 x 1-1/2 x 3/16	42	12
J1514	1-1/2 x 1-1/2 x 3/16	48	18
J1508	1-1/2 x 1-1/2 x 3/16	60	18
J1510	1-3/4 x 1-3/4 x 3/16	60	18
J1512	1-3/4 x 1-3/4 x 3/16	72	22
J26853.1*	1-3/4 x 1-3/4 x 3/16	40	14-3/4

*Diamètre des trous et trous oblongs 13/16''

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

PLAQUE POUR TRAVERSE

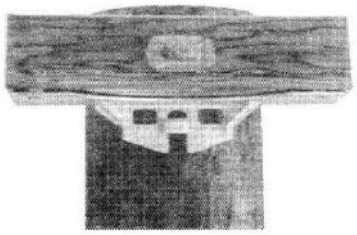

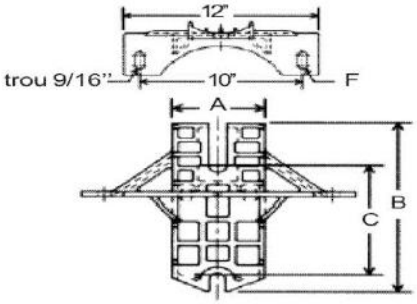

Fig. 1



Fig. 2

NUMÉRO		DIMENSIONS (PO)				
	FIG.	A	B	C OUVERTURE	F	DIM. DE TRAVERSÉE
PX171	1	4	11	7-1/4	9/16 x 1-1/2	3-1/2 – 8
PX182A	2	4	7-1/2	4-1/4 à 6	9/16 x 1-1/2	3-1/2 – 6-1/2
PX182B	2	4	7-1/2	4-1/4 à 6	Trou 11/16	3-1/2 – 6-1/2

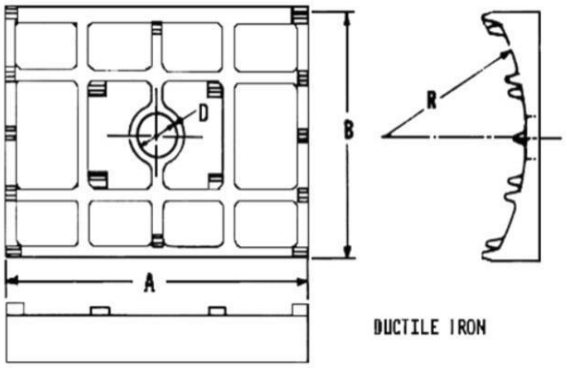

NUMÉRO	A	B	D	R	DIAMÈTRE POTEAU	POIDS /100 (LBS)
GGSF-4040-7	4	4	15/16	3 1/2	6"-16"	200
GGSF-6640-7	6 3/4	4 1/8	15/16	4 1/2	6"-15"	220
GGSF-5340-6	5 5/16	4	13/16	3	6"-11"	200
GGSF-7052-7	7	5 1/4	15/16	5	10"-16"	220
GGSF-7052-8	7	5 1/4	1 1/16	5	10"-16"	220

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

CHEVILLE DE TRAVERSE

TIGE LONGUE – FILET POUR ISOLATEUR : 1''

NUMÉRO	FILET	S	A	B	T	D	DIAMÈTRE RONDELLE	POIDS/ 100 (LBS)
J203Z	Nylon	5/8	5	5-3/4	4	2	2	138
J204Z	Nylon	5/8	5	6-1/2	4	2	2	144
J2802Z	Nylon	5/8	5	8	4	2	1-3/4 (round)	157
J206Z	Nylon	5/8	6	5-3/4	2-3/4	2	2	147
J207Z	Nylon	5/8	6	6-1/2	3	2	2	151
JP40581Z	Nylon	5/8	6	7-1/2	3-1/4	2	2	200
J211Z	Nylon	3/4	6	6-1/2	3-1/4	2	2-1/4	232
J22267Z	Nylon	3/4	6	8	4-1/2	2	2-1/4	276

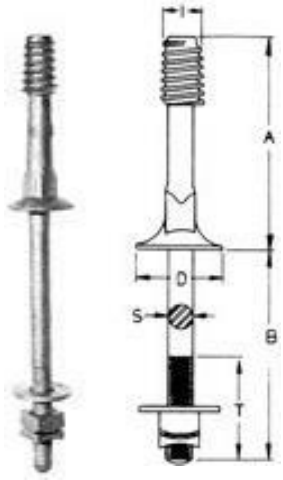

TIGE COURTE – FILET POUR ISOLATEUR : 1''

NUMÉRO	FILET	S	A	B	T	D	POIDS/ 100 (LBS)
J222Z	Nylon Alloy	5/8	6	2-1/2	2-3/8	2	104
J224Z	Nylon Alloy	3/4	6	1-3/4	1-5/8	2	160
J24365Z	Nylon Alloy	3/4	7	2-1/2	2-3/8	2	196

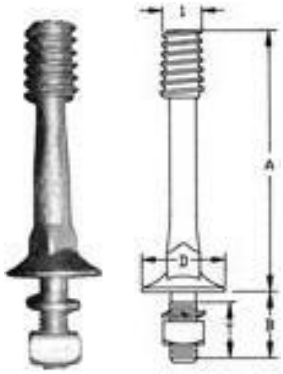

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

CHEVILLE DE TRAVERSE (ROBUSTE)

CHEVILLE DE TRAVERSE, 1'' DE DIAMÈTRE (LONGUE TIGE)
GALVANISÉE À CHAUD

NUMÉRO (FILETS NYLON)	NUMÉRO (FILETS PLOMB)	S DIAMÈTRE DE LA TIGE (PO)	A LONGUEUR AU DESSUS DE LA TRAVERSE (PO)	B LONGUEUR DE LA TIGE (PO)	D DIAMÈTRE DE BASE (PO)
----	J625	5/8	5	6-1/2	2-3/4
J626Z	----	5/8	6	6-1/2	2-3/4
J24626Z	----	5/8	8	5-3/4	3
J606Z	J606	3/4	6	6-1/2	2-3/4
J607Z	J607	3/4	7	6-1/2	2-3/4



CHEVILLE DE TRAVERSE, 1'' DE DIAMÈTRE (TIGE COURTE)
GALVANISÉE À CHAUD

NUMÉRO (FILETS NYLON)	NUMÉRO (FILETS PLOMB)	S DIAMÈTRE DE LA TIGE (PO)	A LONGUEUR AU DESSUS DE LA TRAVERSE (PO)	B LONGUEUR DE LA TIGE (PO)	D DIAMÈTRE DE BASE (PO)
----	J629	3/4	7	1-3/8	2-3/4



CHEVILLE DE TRAVERSE, 1-3/8'' DE DIAMÈTRE (LONGUE TIGE)
GALVANISÉE À CHAUD

NUMÉRO (FILETS NYLON)	NUMÉRO (FILETS PLOMB)	S DIAMÈTRE DE LA TIGE (PO)	A LONGUEUR AU DESSUS DE LA TRAVERSE (PO)	B LONGUEUR DE LA TIGE (PO)	D DIAMÈTRE DE BASE (PO)
J647Z	----	5/8	7	7	3
6608Z	----	3/4	8	7	3



CHEVILLE DE TRAVERSE, 1-3/8'' DE DIAMÈTRE (TIGE COURTE)
GALVANISÉE À CHAUD

NUMÉRO (FILETS NYLON)	NUMÉRO (FILETS PLOMB)	S DIAMÈTRE DE LA TIGE (PO)	A LONGUEUR AU DESSUS DE LA TRAVERSE (PO)	B LONGUEUR DE LA TIGE (PO)	D DIAMÈTRE DE BASE (PO)
----	J631	3/4	8	1-5/8	3
----	J635-DC	3/4	12	1-5/8	3



(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

CHEVILLE DE TÊTE

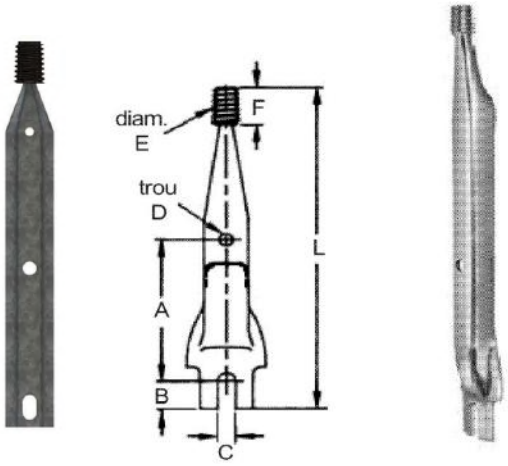

CHEVILLE DE TÊTE
GALVANISÉE À CHAUD

NUMÉRO (FILETS NYLON)	NUMÉRO (FILETS PLOMB)	DIMENSIONS (PO)						
		L	A	B	C	D	E	F
J26945Z	----	24	8	1-9/16	11/16	11/16	1	1-3/4
J26947Z	----	24	8	1-9/16	11/16	11/16	1-3/8	2-1/8
J26946Z	----	24	8	1-9/16	13/16	13/16	1	1-3/4
J26948Z	----	24	8	1-9/16	13/16	13/16	1-3/8	2-1/8
----	J26838	30	8	1-9/16	11/16	11/16	1	1-3/4

CHEVILLE DE BOULON 5/8''
GALVANISÉE À CHAUD

NUMÉRO	DIAMÈTRE DES FILETS (PO)
J2840	1
J2841	1 3/8

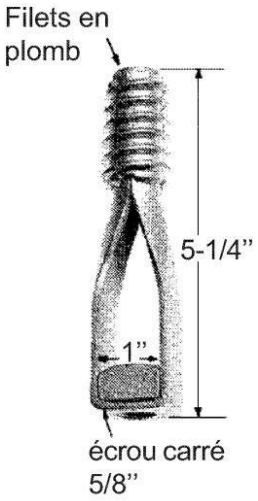

ADAPTATEUR DE CHEVILLE DE 1'' À 1 3/8''
FILETS EN PLOMB



J4023

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

PLAQUE, ÉCHELON ET CROCHET

PLAQUE DE PROTECTION DE POTEAU GALVANISÉE À CHAUD

NUMÉRO	DIAMÈTRE DES TROUS	DIMENSIONS (PO)
J1037	9/16''	16 x 18 x 18



ÉCHELON À POTEAU GALVANISÉ À CHAUD

NUMÉRO	DIMENSIONS (PO)
J1118	5/8 x 10



CROCHET GALVANISÉ À CHAUD

NUMÉRO	DIMENSIONS (PO)
J3316P	7/16 x 4-3/4
J3318	5/16 x 3-1/2

J3316P

J3318

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

PROTÈGE CÂBLE GALVANISÉ DROIT

NUMÉRO	LARGEUR	LONGUEUR	POIDS / 100 (LBS)
534UC	3/4''	5'	330
834UC	3/4''	8'	530
5114UC	1-1/4''	5'	440
8114UC	1-1/4''	8'	760
5214UC	2-1/4''	5'	900
8214UC	2-1/4''	8'	1300
5314UC	3-1/4''	5'	1100
8314UC	3-1/4''	8'	2000
5334UC	3-3/4''	5'	1500
8334UC	3-3/4''	8'	2160
8414UC	4-1/4''	8'	2800

PROTÈGE CÂBLE GALVANISÉ ÉVASÉ



NUMÉRO	LARGEUR	LONGUEUR	POIDS / 100 (LBS)
5114UCF	1-1/4''	5'	460
8114UCF	1-1/4''	8'	840
5214UCF	2-1/4''	5'	930
8214UCF	2-1/4''	8'	1300
5314UCF	3-1/4''	5'	1540
8314UCF	3-1/4''	8'	1850
8334UCF	3-3/4''	8'	2450
8414UCF	4-1/4''	8'	3010
85UCF	5''	8'	3200

DISPONIBLE EN ALUMINIUM, AJOUTER UN « A » À LA FIN DU NUMÉRO

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

SANGLE POUR PROTÈGE CÂBLE

NUMÉRO	LARGEUR	LONGUEUR	POIDS / 100 (LBS)
34SUC	3/4''	3/4 x 1/8	12
114SUC	1-1/4''	3/4 x 1/8	15
214SUC	2-1/4''	1 x 1/8	24
314SUC	3-1/4''	1 x 3/16	60
334SUC	3-3/4''	1 x 3/16	70
414SUC	4-1/4''	1 x 3/16	80
50SUC	5''	7/8	90

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PROTÈGE BUTOIR

PROTÈGE BUTOIR
ACIER GALVANISÉ SELON CSA G-164

NUMÉRO	DESCRIPTION
T1000-1	1 conduit 4'' (115 mm)

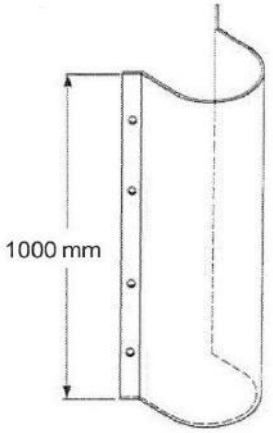

PROTÈGE BUTOIR
ACIER GALVANISÉ SELON CSA G-164

NUMÉRO	DESCRIPTION
T1000-2	2 conduits 4'' (115 mm)

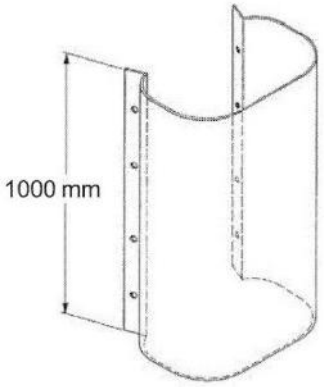

PROTÈGE BUTOIR ACIER
ACIER GALVANISÉ SELON CSA G-164

NUMÉRO	DESCRIPTION
T1000-3	4 conduits 4'' (115 mm)

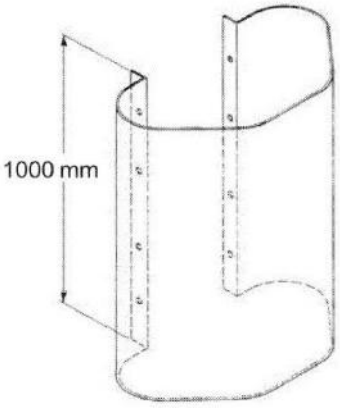

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ATTACHE FIL

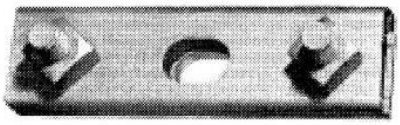

ATTACHE DE FIL PORTEUR GALVANISÉE À CHAUD

NUMÉRO	NOMBRE DE BOULONS	DIAMÈTRE DES BOULONS (PO)	LONGUEUR DE L'ATTACHE (PO)	DIAMÈTRE DU TROU DE MONTAGE (PO)	DIAMÈTRE DU FIL PORTEUR (PO)
J1095	1	----	2-1/2	11/16	1/4 à 7/16
J1096	3	1/2	5-3/4	11/16 x 15/16	1/4 à 7/16
J25088.1	3	1/2	5-3/4	11/16 x 15/16	1/4 à 7/16

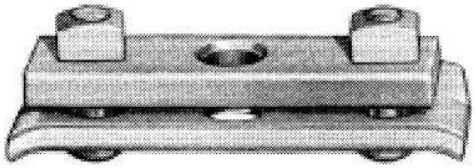

ATTACHE DE FIL PORTEUR À ANGLE GALVANISÉE À CHAUD

NUMÉRO	NOMBRE DE BOULONS	DIAMÈTRE DES BOULONS (PO)	LONGUEUR DE L'ATTACHE (PO)	DIAMÈTRE DU TROU DE MONTAGE (PO)	DIAMÈTRE DU FIL PORTEUR (PO)
J7901	----	1/2	5-3/4	13/16	1/4 à 7/16
J7901A	1/2	1/2	5-3/4	11/16	1/4 à 7/16
J7902B	1/2	5/8	6	13/16	1/4 à 7/16

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

SUPPORT EN 'L'

J24515

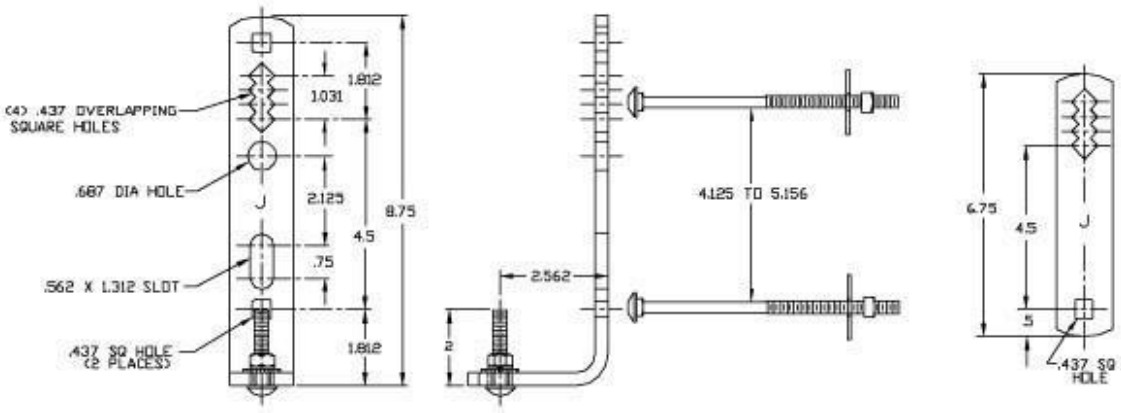

J24516

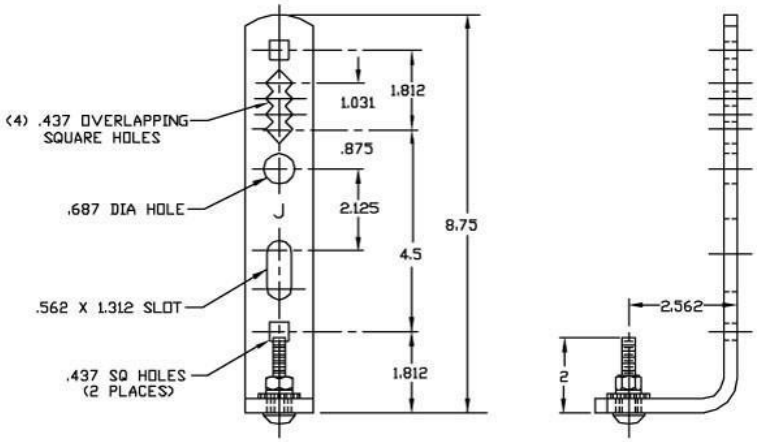

J24711

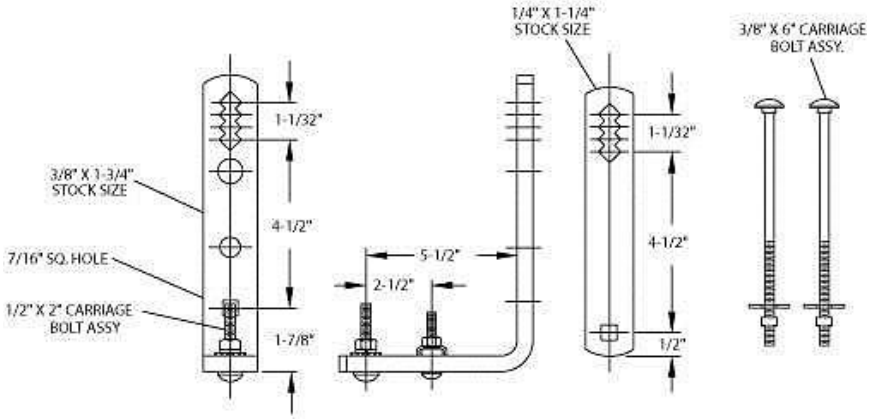

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

SUPPORT D'ÉQUIPEMENT

SUPPORT UNIVERSEL GALVANISÉ À CHAUD

NUMÉRO
LIMW

SUPPORT EN Z GALVANISÉ À CHAUD

NUMÉRO
LIMZ

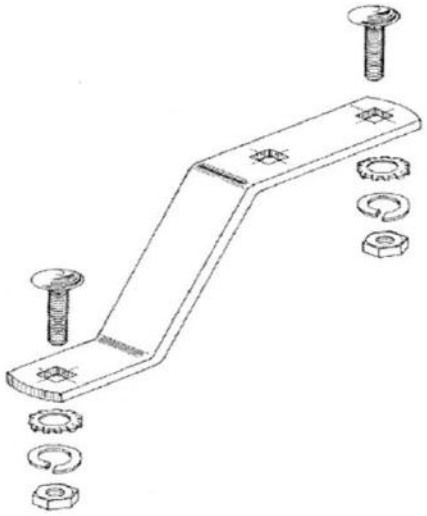

POSITIONNEUR DE CÂBLE ALUMINIUM

NUMÉRO
CS-820

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

SUPPORT POUR TRANSFORMATEUR

Universal Mounting Bracket with Adapter Plates

Universal mounting bracket consists of 3 brackets and one plate bolted together. Bolts and grounding clamp included. 3 only 3/4" mounting bolts also included.
Horizontal adapter plate for transformers with 15", 22" or 29" bracket spacing - 5/8" mounting bolts and washers included.
Vertical adapter plate for transformers with 15" mounting bracket- 3/4" mounting bolts and washers included or 11/16" hardware.

Cat. No.	Description	Std. Pkg.	Wt.-lbs./ each
65UMB	Universal mounting bracket (2-phase type)	1	36
95UMB	Universal mounting bracket (3-phase type)	1	45
95UMB-13	3 phase c/w 13/16 Keyhole	1	45
35UMB-13	Single phase c/w 13/16 Keyhole	1	25
35UMB	Universal mounting bracket 1-phase	1	25
14HAP	Horizontal adapter plate	6	7
15VAP	Vertical adapter plate	9	6
15VAP-11	Vertical adapter plate -11/16 hole c/w 3 bolts	9	6

3 methods of installation:
#1: Using 2 sets of 95UMB spaced vertically to fit transformers with 15", 22" or 29" brackets – 3/4" mounting bolts (included in 95UMB package).
#2: Using 1 set of 95UMB with 15VAP vertical adapter plates - 3/4" mounting bolts.
#3: 2 sets of 95UMB with 2 sets of 14HAP horizontal adapter plates- 5/8" mounting bolts- for transformers without direct pole mounting feature.

95UMB - Two Units Shown

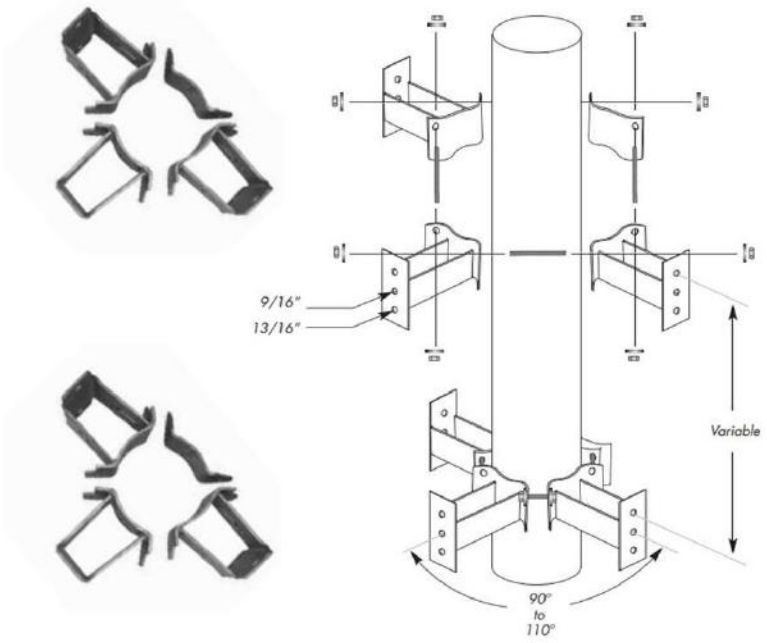

SUPPORT POUR TRANSFORMATEUR TRIPLE

SUPPORT DE TRANSFORMATEURS TRIPLE
ACIER GALVANISÉ

NUMÉRO	3 TRANSFORMATEURS DE
J6865	3 @ 50 kVA
J6866	75 @ 333 kVA

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

SUPPORT À ISOLATEUR

MANILLE À ISOLATEUR SECONDAIRE (BOBINE) ACIER GALVANISÉ À CHAUD

NUMÉRO	ISOLATEUR CLASSE
J250	53-2
J093	53-2



L'isolateur de type 53-2 doit être commandé séparément.
Voir la section des isolateurs.



MANILLES MULTIPLES À ISOLATEUR SECONDAIRE GALVANISÉES À CHAUD

NUMÉRO	NOMBRE DE FILS	ESPACE ENTRE LES FILS (PO)	LONGUEUR TOTALE (PO)
J767	2 3	8 4	18
J768	3	8	26
J769	3 4	12 8	34

L'isolateur de type 53-2 doit être commandé séparément.
Voir la section des isolateurs.



EXTENSION DE MANILLES MULTIPLES GALVANISÉE À CHAUD

NUMÉRO	LONGUEUR (PO)
J2355	6
J2357	9

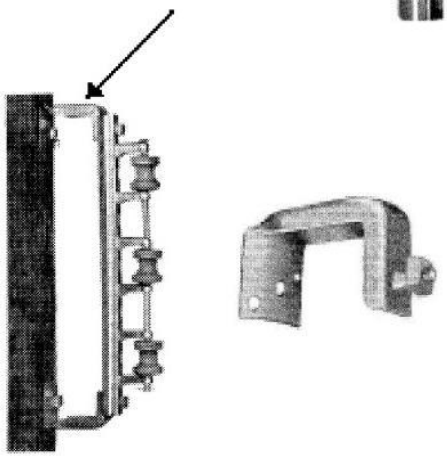

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

SÉPARATEUR DE CÂBLE ET BOULON À ISOLATEUR

SÉPARATEUR DE CÂBLES SECONDAIRES POLYÉTHYLÈNE HAUTE DENSITÉ

NUMÉRO	COULEUR
S-604BL	Noir
S-604GR	Gris

BOULON À ISOLATEUR – SIMPLE ÉPAULEMENT GALVANISÉ À CHAUD

NUMÉRO	LONGUEUR DE LA TIGE (PO)	LONGUEUR TOTALE	LONGUEUR DES FILETS (PO)
J2343-1/2	9	13-1/2	4
J2344-1/2	10	14-1/2	4
J2346-1/2	12	16-1/2	6
J2348-1/2	14	18-1/2	6

L'isolateur de type 53-2 ou 53-4 doit être commandé séparément. Voir la section des isolateurs.

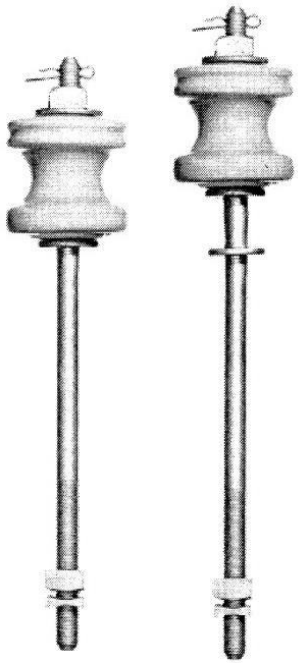

BOULON À ISOLATEUR – DOUBLE ÉPAULEMENT GALVANISÉ À CHAUD

NUMÉRO	LONGUEUR DE LA TIGE (PO)	LONGUEUR TOTALE	LONGUEUR DES FILETS (PO)
J2395	9	15	4
J2396	10	16	4
J2398	12	18	6

L'isolateur de type 53-2 ou 53-4 doit être commandé séparément. Voir la section des isolateurs.

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PINCE DE SERVICE EN ALUMINIUM (WEDGE)

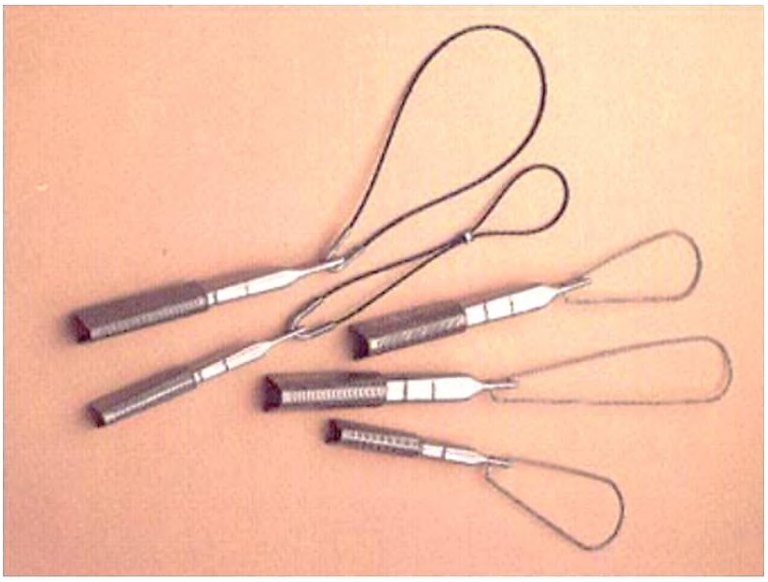

NUMÉRO (COULEUR) (CODE)	CONDUCTEUR (PO)	ACSR	AAC	AAAC	FORCE DE TENSION MAX. (LBS)
7195 (ORANGE) (W62-1)	0,160 – 0,330	2-6	1-6	2-6	1000
7187 (BLEU) (W20-1)	0,250 – 0,414	1/0 – 4	2/0 – 2	1/0 – 4	1200
7197 (ROUGE) (W40-1)	0,414 – 0,563	4/0 – 2/0; 1/0*	4/0 – 2/0	4/0 – 2/0	1600

Arceau en acier inoxydable solide.
Arceau en nylon flexible disponible. Ajouter « FL » au numéro de catalogue.
Pour d'autres options disponibles, voir : www.macleanpower.com
*1/0 avec force de tension maximum de 500 lbs.

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PINCE DE DÉRIVATION

NUMÉRO	CONNECTION COURSE / DÉVIATION	DIAMÈTRE DE COURSE	COURSE	DIAMÈTRE DE DÉRIVATION	DÉRIVATION	LONGUEUR
C1520	CU/CU	.128"-.414"	#8 sol-2/0 str	.128"-.414"	#8 sol-2/0 str	4.50
C1520LD	CU/CU	.128"-.414	#8 sol-2/0 str	.128"-.414"	#8 sol-2/0 str	4.50
C1530	CU/CU	.162"-.745"	#6 sol-400 MCM	.152"-.682"	#6 sol-4/0 str	6.50
C1530A	AL//AL/CU	.162"-.745"	#6 sol-400 MCM	.152"-.682"	#6 sol-4/0 str	6.50
C1535AP	AL//AL/CU	.250"-.860"	#4 ACSR-477 MCM	.250"-.860"	#4 ACSR 477 MCM	6.50
C1540AP	AL//AL/CU	.502"-1.031"	4/0 ACSR 800 MCM	.198"-.703"	#4 sol-350 MCM	6.50

Notes :

1. Suffixe « A » indique un corps en aluminium
2. Pour pince à « usage général », ajouter le suffixe « P » pour étamée
3. Ajouter le suffixe « -9 » pour un emballage avec graisse
4. Nous consulter pour d'autres options

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PINCE DE DÉRIVATION (suite)

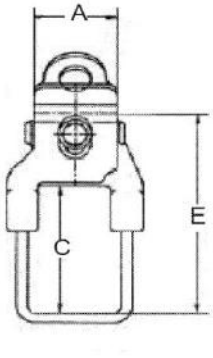

Fig. 1



Fig. 2

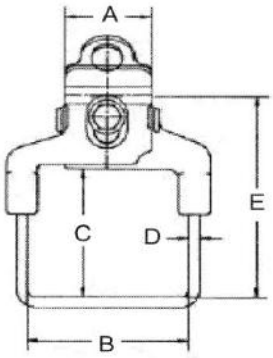

Fig. 5



Fig. 3



Fig. 4

Le suffixe "E" signifie un écrou à oeil
Le suffixe "TN" signifie étamé
L'inibiteur est appliqué en usine.

ÉTRIER DE DÉVIATION

NUMÉRO	FIG.	CONDUCTEUR							
		ACSR	AAC	A	B	C	D	E	F
HLS-2/0	1 et 3	6-2/0	4-2/0	2.00	2.25	3.38	#2 Cu.	5 3/16	1/2
HLS-2/0-E	1 et 4	6-2/0	4-2/0	2.00	2.25	3.13	#2 Cu.	4 7/8	1/2
HLS-2/0-WB	5 et 3	6-2/0	4-2/0	2.00	3.75	3.38	#2 Cu.	5 3/16	1/2
HLS-E-WB	5 et 4	6-2/0	4-2/0	2.00	3.75	3 1/8	#2 Cu.	4 7/8	1/2
HLS-4/0	1 et 3	4-4/0	3-4/0	2.75	3.19	4.00	1/0 Cu.	6 1/4	1/2
HLS-4/0-E	1 et 4	4-4/0	3-4/0	2.75	3.19	3.88	1/0 Cu.	5 3/4	1/2
HLS-397	2 et 3	1/0-397.5	2/0-477	4.00	3.13	4.25	2/0 Cu.	5 3/16	1/2
HLS-397-E	2 et 4	1/0-397.5	2/0-477	4.00	3.13	4.00	2/0 Cu.	4 7/8	1/2
HLS-397-LD	2 et 3	1/0-397.5	2/0-477	4.00	3.13	4.13	1/0 Cu.	5 3/16	1/2
HLS397-LD-E	2 et 4	1/0-397.5	2/0-477	4.00	3.13	3.88	1/0 Cu.	4 7/8	1/2
HLS-795	2 et 3	336.4-795	397.5-954	4.00	3.56	5.13	4/0 Cu.	8 3/14	1/2
HLS-795-E	2 et 4	336.4-795	397.5-954	4.00	3.56	5.00	4/0 Cu.	6 7/8	1/2
HLS-795-LD	2 et 3	336.4-795	397.5-954	4.00	3.56	4.25	2/10 Cu.	7 ¼	1/2
HLS-795-LD-E	2 et 3	336.4-795	397.5-954	4.00	3.56	4.00	2/0 Cu.	6 7/8	1/2

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PINCE D'AMARRAGE



Fig. 1



Fig. 2



Fig. 3

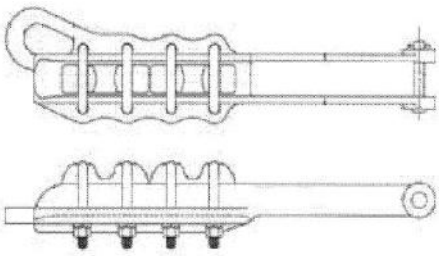

Fig. 4

PINCE DROITE D'AMARRAGE ALUMINIUM

NUMÉRO	FIG.	CONDUCTEUR			BOULON EN U	CAPACITÉ PINCE LBS	CAPACITÉ ŒIL LBS
		POUCES	ACSR	ALUMINIUM			
ASD-1-N	1	.15-.47	8-2/0	6-3/0	1/2	7000	6000
ASD-1L-N	1	.15-.47	8-2/0	6-3/0	1/2	7000	6000
ASD-2-N	2	.19-.47	6-2/0	6-3/0	3/8	7000	7000
ASD-2L-N	2	.19-.47	6-2/0	6-3/0	3/8	7000	7000
ASD-34-N	2	.30-.60	2-266.8	1-266.8	1/2	8500	8000
ASD-37-N	2	.46-.75	3/0-397.5	3/10-400	1/2	10 000	10 000
ASD-45-N	2	.52-.90	4/0-477	4/0-600	1/2	10 000	10 000
ASD-45L-N	2	.52-.90	4/0-477	4/0-600	1/2	12 000	12 000
ASD-58-N	2	.65-1.25	211.3-1113	300-1113	1/2	15 000	10 000
ASD-69-N	2	.72-1.55	336.4-1590	397.5-1800	5/8	15 000	12 000
ASD-92-N	3	1.38-2.00	1272-2156	1500-3000	5/8	25 000	18 750
ASD-92L-N	4	1.38-2.00	1272-2156	1500-3000	5/8	25 000	18 750

Remplacer le suffixe « -N » par « -S » pour une attache de type rotule.

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PINCE D'AMARRAGE (suite)

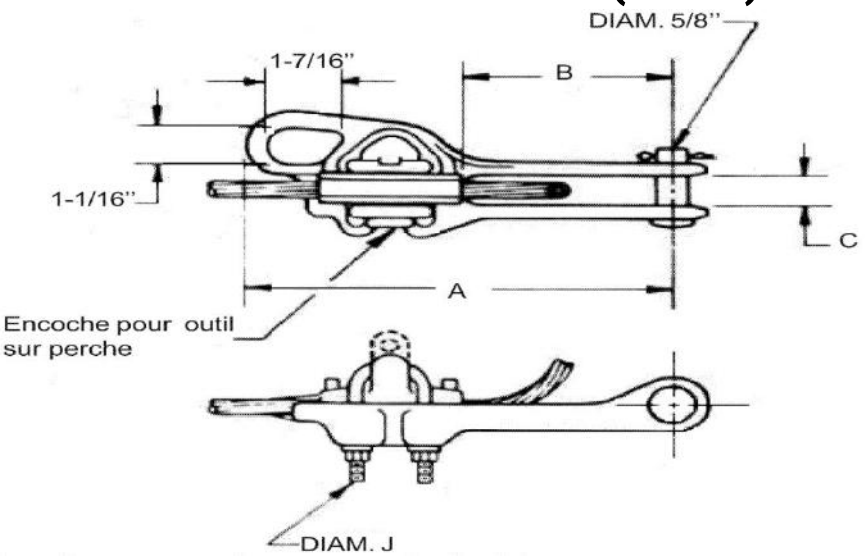

PINCE DROITE D'AMARRAGE (OUVERTURE LATÉRALE) ALUMINIUM

NUMÉRO	CONDUCTEUR		CAPACITÉ PINCE LBS	CAPACITÉ ŒIL LBS
	ACSR	ALUMINIUM		
HDSO-47	6-2/0	4-3/0	7000	4000
HDSO-57	4-4/0	2-4/0	8000	5000
HDSO-70	2-336.4	1-350	9000	6000
HDSO-82	2-477	1-477	9000	6000
HDSO-88	4-556.5	2-556.5	10 000	6000
HDSO-88L-6	4-556.5	2-556.5	10 000	6000
HDSO-88L-7	4-556.5	2-556.5	10 000	6000
HDSO-116	336.4-954	397.5-1000	12 000	8000
HDSO-116-2	336.4-954	397.5-1000	27 000	16 000
HDSO-130	300-1113	336.4-1272	15 000	12 000

NUMÉRO	DIMENSIONS			
	A	B	C	J
HDSO-47	8.50	4.25	0.75	3/8
HDSO-57	8.88	4.25	0.75	3/8
HDSO-70	9.50	4.75	0.88	3/8
HDSO-82	10.50	4.88	0.88	1/2
HDSO-88	10.25	4.75	1.00	1/2
HDSO-88L-6	11.38	6.00	0.88	1/2
HDSO-88L-7	12.38	7.00	1.00	1/2
HDSO-116	12.00	7.25	1.00	1/2
HDSO-116-2	19.88	8.00	1.25	1/2
HDSO-130	14.00	8.00	1.00	1/2

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PINCE D'AMARRAGE (suite)

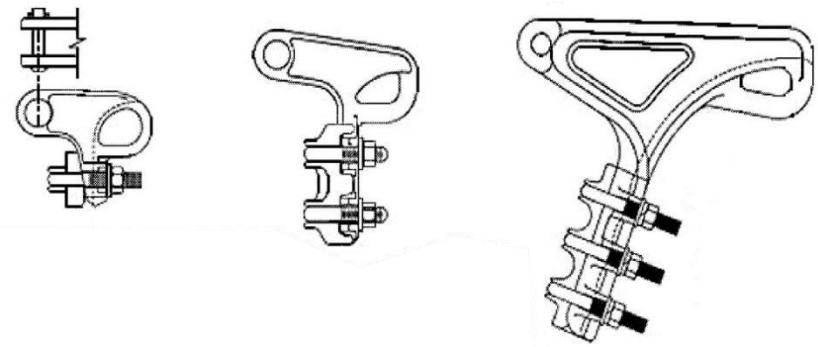

PINCE D'AMARRAGE DE DÉRIVATION (QUADRANT) ALUMINIUM

NUMÉRO	CONDUCTEUR			BOULON EN U	CAPACITÉ PINCE LBS	CAPACITÉ ŒIL LBS
	POUCES	ACSR	ALUMINIUM			
DA-10-N	.16-.522	6-3/0	6-4/0	1	3/8	8000
DA-10-S	.16-.522	6-3/0	6-4/0	1	3/8	8000
DA-15-N	.16-.522	6-3/0	6-4/0	2	1/2	8000
DA-15-S	.16-.522	6-3/0	6-4/0	2	1/2	8000
DA-15H-N	.23-.522	4-3/0	4-4/0	2	1/2	10 000
DA-15H-S	.23-.522	4-3/0	4-4/0	2	1/2	10 000
DA-20-N	.25-.62	4-266.8 18/1	2-266.8	2	1/2	12 000
DA-20-S	.25-.62	4-266.8 18/1	2-266.8	2	1/2	12 000
DA-22-N	.25-.743	4-397.5 18/1	1/0-400	2	1/2	15 000
DA-22-S	.25-.743	4-397.5 18/1	1/0-400	2	1/2	15 000
DA-30-N	.44-.88	2/0-556.5 18/1	3/0-556.5	2	1/2	15 000
DA-30-S	.44-.88	2/0-556.5 18/1	3/0-556.5	2	1/2	15 000
DA-40-N	.46-1.065	3/0-954 54/7	4/0-795	3	1/2	20 000
DA-40-S	.46-1.065	3/0-954 54/7	4/0-795	3	1/2	20 000
DA-26-N	.75-1.34	397.5 26/7-1113	447-1351.5	3	5/8	25 000
DA-26-S	.75-1.34	397.5 26/7-1113	447-1351.5	3	5/8	25 000

Ajouter le suffixe « -S » pour une attache de type rotule
Ajouter le suffixe « -C » pour une attache de type chape

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

MANCHON AUTOMATIQUE

RACCORD AUTOBLOQUANT POUR HAUBAN ET MESSAGER

NUMÉRO	DIAMÈTRE DU CONDUCTEUR (PO)	CALIBRE DE L'HAUBAN	GRADE
5039	0.140-0.215	3/16''	Universel
5040	0.215-0.270	1/4''	Universel
5041	0.270-0.315	5/16''	Universel
5042	0.325-0.392	3/8''	Universel
5043	0.392-0.455	7/16''	Universel
5044	0.455-0.520	1/2''	Universel
4999	0.185-0193	3/16''	Tout Grade
5000	0.140-0.215	3/16''	Tout Grade
5001	0.310-0.335	5/16''	Tout Grade
5002	0.360-0.405	3/8''	Tout Grade

Grade Universel recommandé pour l'Alumoweld, Aluminisé, EHS et acier galvanisé.

Tout Grade recommandé pour les grades Commun, Siemens-Martin, High Strength, Utility Grade, brins d'acier galvanisé ou Aluminisé.

RACCORD AUTOBLOQUANT POUR CONDUCTEUR ACSR, AAC ET AAAC

NUMÉRO	CONDUCTEUR			CODE DE COULEUR
	ACSR	AAC	AAAC	
7651	#4-6/1, #4-7/1	#4	#4	Orange
7652AP	#2-6/1, #2-7/1 #4-6/1, #4-7/1	#2, #4	#2, #4	Rouge/Orange
7653	1/0-6/1	1/0, 2/0	1/0	Jaune
7654AP	1/0-6/1 2/0-6/1	1/0, 2/0, 3/0	1/0, 2/0	Gris/Jaune
7656AP	3/0, 4/0	4/0	3/0, 4/0	Rose/Noir
7658AP	266.8-18/1 336.4-18/1	266.8, 336.4 397.5	266.8, 336.4	Vert/Brun
7659	397.5-18/1 477-18/1	477-18 556.5-19	397.5-19 477-19	Aqua

RACCORD AUTOBLOQUANT POUR CONDUCTEUR DE CUIVRE

NUMÉRO	CONDUCTEUR			CONDUCTEUR DIAMÈTRE (PO)
	SOLID	7 STRAND	COPPERWELD	
81	#8			0.120-0.135
61	#6	#8		0.145-0.168
41	#4	#6	8A	0.184-0.210
47	#3	#4	6A	0.225-0.245
21	#2, #3	#3	5A	0.228-0.265
27	#1	#2	4A	0.270-0.305
101	1/0	#1	3A	0.305-0.340
107	2/0	1/0	2A	0.340-0.385
207	3/0	2/0		0.398-0.420
307	4/0	3/0		0.437-0.475
407		4/0		0.485-0.540

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

CONNECTEUR PARALLÈLE

D and O Dies

Standard Ultra Range Squeezon Connectors

Seven Connector Series #	Catalog Number	Groove	Standard Conductor ACSR & Aluminum Alloy	Standard Conductor Aluminum or Copper Stranded	Standard Conductor Aluminum or Copper Solid	Compact Conductor ACSR	Compact Conductor Stranded	Wire Dia. Range Max (in.)	Wire Dia. Range Min	Die	Indents O	Indents WH	Length
3	502-82	A B	1/0, 2/0 s#6, 4, 3, 2	2/0, 3/0 #6, 4, 3, 2,1-19	3/0, 4/0 #6, 4, 3, 2,1,1/0	2/0, 3/0 #6, 4, 3, 2,1	3/0 #6, 4, 3, 2, 1	.470 .332	.398 .162	D D3	4	2	1-7/8"
5	503-82	A B	3/0, 4/0 #6, 4, 3, 2	4/0 #6, 4, 3, 2,1-19	250, 266, 300 #6, 4, 3, 2,1,1/0	4/0, 266-16/1 #6, 4, 3, 2,1	4/0, 250, 266 #6, 4, 3, 2,1	.563 .332	.480 .162	D D3	5	2	1-7/8"
4	504-82	A B	#1, 1/0, 2/0 #1, 1/0, 2/0	#1-3, 1/0, 2/0, 3/0 #1-3, 1/0, 2/0, 3/0	2/0, 3/0, 4/0 2/0, 3/0, 4/0	1/0, 2/0, 3/0 1/0, 2/0, 3/0	1/0, 2/0, 3/0 1/0, 2/0, 3/0	.470 .470	.338 .338	D D3	5	2	1-7/8"
6	505-82	A B	3/0, 4/0 #1, 1/0, 2/0	3/0, 4/0 #1-3,1/0, 2/0	250, 266, 300 2/0, 3/0	3/0, 4/0, 266-18/1 1/0, 2/0	4/0 250, 266 1/0 2/0, 3/0	.563 .447	.461 .338	D D3	7	3	2-1/2"
1	506-82	A B	#6, 4, 3, 2 #6, 4, 3, 2	#6, 4, 3, 2,1 #6, 4, 3, 2, 1	#6, 4, 3, 2, 1, 1/0 #6, 4, 3, 2, 1, 1/0	#6, 4, 3, 2, 1 #6, 4, 3, 2, 1	#6, 4, 3, 2,1 #6, 4, 3, 2,1	.332 .332	.162 .162	O	4	2	1-1/2"
7	507-82	A B	3/0, 4/0 3/0, 4/0	3/0, 4/0 3/0 4/0	250, 266, 300 250, 266, 300	3/0, 4/0, 266-18/1 3/0, 4/0, 266-18/1	4/0, 250, 266 4/0, 250, 266	.563 .563	.461 .461	D D3	7	3	2-1/2"
2	508-82	A B	#4,3,2,1,1/0 #6, 4, 3, 2	#3-3, 2, 1, 1/0, 2/0 #6, 4, 3, 2, 1-19	#1,1/0,2/0,3/0 #6, 4, 3, 2, 1, 1/0	#2,1,1/0,2/0 #6, 4, 3, 2, 1	#2,1,1/0,2/0 #6, 4, 3, 2, 1	.419 .332	.250 .162	O	5	2	1-3/4"

Standard Lighting Ultra Range Squeezon Connectors

Catalog Number Alloy	Groove	Standard Conductor ACSR & Aluminum Conductors	Standard Conductor Aluminum or Copper Stranded	Standard Conductor Aluminum or Copper Solid	Compact Conductor ACSR	Compact Conductor Stranded	Wire Dia. Range Max (in.)	Wire Dia. Range Min	Die	Indents	Length
420-82	A	–	#14, 12, 10, 6	#14, 12, 10, 8	–	#14,12,10, 8	.160	.064	O Tool 5/8" Die	3	5/8"
	B	–	#18, 16, 14, 12,10, 8	#18, 16, 14, 12,10, 8	–	#18,16,14,12, 10,8	.160	.064			
421-82	A	#6, 4, 3	#6, 4, 3, 2	#6, 4, 3, 2, 1	#6, 4, 3, 2	#4, 3, 2	.298	.182	O Tool 5/8" Die	3	13/16"
	B	–	#14, 12, 10, 9, 8	#14, 12, 10, 8, 7	–	#8	.146	.064			
424-82*	A	#4, 3, 2, 1, 1/0	#3, 2, 1, 1/0, 2/0	#2, 1/0, 2/0, 3/0	#4, 3, 2,1,1/0, 2/0	#4, 3, , 2,1,1/0, 2/0	.419	.250	O Tool "O" Die	3	1-1/16"
	B	–	#10, 9, 8	#10, 8, 7, 6	–	#8	.162	.101			
	C	–	#12	#14, 12, 10	–	–	.101	.064			

* Catalog No. 424-82 has two tap grooves either of which may be used separately without a conductor in the other groove.

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

CONNECTEUR PARALLÈLE (suite)

N Die

"N" Size Ultra Range Squeezon Connectors

Catalog Number	Groove	Standard Conductor: ACSR & Aluminum Alloy Conductors	Standard Conductor: Aluminum or Copper: Stranded	Standard Conductor: Aluminum or Copper: Solid	Compact Conductor: ACSR Aluminum Alloy Cond.	Compact Conductor: Stranded	Wire Dia. Range: Max (in.)	Wire Dia. Range: Min	Die	Indents WH	Length
489-82	A	266, 300, 336, 397, 477-18/1	250, 266, 300, 336, 350, 397,	336, 397, 450, 477, 500	336-18/1 397-18/1	300, 336, 350, 397, 477, 556	.814	.573	N	3	3-1/2"
	B	336-26/7, 336-30/7, 397 477-18/1	400, 450, 477, 397, 400, 450, 477, 500	500	477-18/1 477-18/1 556-18/1	477, 500, 556	.814	.707			
494-82	A	266, 300, 336, 397, 477-18/1	250, 266, 300, 336, 350, 397, 400, 450, 477, 500	336, 397, 450, 477, 500	336-18/1, 397-18/1, 477-18/1, 556-18/1,	300, 336, 350, 397, 477, 556	.814	.573	N	3	3-1/2"
	B	266, 336-18/1	250, 266, 300, 336, 350	336, 350, 397, 450, 477	336-18/1, 397-18/1	300, 336, 350, 397	.690	.573			
492-82	A	266, 300, 336, 397, 477-18/1	250, 266, 300, 336, 350, 397, 400, 450, 477, 500	336, 397, 450, 477	336-18/1, 397-18/1, 477-18/1, 556-18/1, 2/0, 3/0, 4/0,	300, 336, 350, 397, 477, 556	.814	.573	N	3	3-1/2"
	B	2/0, 3/0, 4/0	2/0, 3/0, 4/0	4/0, 250, 266, 300	266-18/1	3/0, 4/0, 250 266	.563	.410			
491-82	A	4/0, 266, 300, 4/0, 250, 266, 336, 397, 477-18/1	300, 336, 397, 300, 336, 350, 397, 450, 477, 500	4/0, 266-18/1, 477, 500	250, 300, 336, 336-18/1, 397-18/1, 477-18/1, 556-18/1 #3, 2, 1/0	.814 397, 477, 500, 556	.814	.517	N	2	2"
	B	#4, 3, 2, 1, 1/0	#3, 2, 1, 1/0	#1, 1/0, 2/0, 3/0		#2, 1, 1/0, 2/0	.409	.250			
490-82	A	4/0, 266, 300, 336, 397, 477-18/1	4/0, 250, 266, 300, 336, 350, 397, 450, 477, 500	300, 336, 397, 477, 500	4/0, 266-18/1, 336-18/1, 397-18/1, 477-18/1, 556-18/1 #6, 4, 3, 2	250, 300, 336, 397, 477, 500, 556	.814	.517	N	2	2"
	B	#6, 5, 4, 3	#7, 6, 5, 4, 3, 2	#6, 5, 4, 3, 2, 1		#6, 4, 2	.298	.162			

Note: Conductor sizes listed include all strandings except where otherwise shown.

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ÉQUIVALENCE DE CONNECTEUR PARALLÈLE

Type WR "O" and "D" – Die seven connector program				
Blackburn	Penn Union	Burndy	Homac	Kearney
WR159	KO-R06	YHO100, YHO1	OB44	506-82
WR189	KO-R08	YHO150, YHO2	OB101	508-82
WR289	KD-R02	YHD200,YHD3	DB202	502-82
WR279	KD-R04	YHD300, YHD4	DB2020	504-82
WR379	KD-R03	YHD250, YHD5	DB404	503-82
WR399	KD-R05	YHD350, YHD6	DB4020	505-82
WR419	KD-R28	YHD400, YHD7	DB4040	507-82
Type WR – Supplemental "O" and "D" die seven connector program				
Blackburn	Penn Union	Burndy	Homac	Kearney
WR149	KO-R33	YNO125	–	333-81
WR179	KO-R08	YC25A2	–	325-81
WR199	KO-R08	YP26AU2	–	329-81
WR1010	–	YHO2-ONE	OB1010D	–
WR259	KD-R04	YC25A25	–	–
WR299	KD-R02	YHD200	–	–
WR219	KD-R26	–	–	326-81
WR359	KD-R49	–	–	349-81
WR369	KD-R94	–	–	394-81
WR389	KD-R95	–	–	395-8
Type WR – Wide range "N" die tap connectors for hydraulic tools, 12-ton and greater				
Blackburn	Penn Union	Burndy	Homac	Kearney
WR715	KN-1	–	NB50040	–
WR775	–	YHN450	–	–
WR815	–	YHN500	–	–
WR835	KN-R2	–	–	–
WR875	–	–	–	–
WR885	–	YHN525	NB500	–
Type WR – Wide range "N" die tap connectors for hydraulic tools, 10-ton and greater				
Blackburn	Penn Union	Burndy	Homac	Kearney
WR699	KN-0	–	–	480
WR719	–	–	–	481
WR739	KN-R2	YHN550	–	482-81
WR779	KN-4	YHN600	–	483
WR799	KN-R5	–	–	485-81
WR819	KN-R6	YC33R26	NB60020	486-81
WR839	KN-R7	–	–	487-81
WR879	KN-8	–	–	488
WR889	–	–	–	–
Type WR – Wide range aluminum tap connectors "R" die seven connector program				
Blackburn	Penn Union	Burndy	Homac	Kearney
WR909	KR-R03	YHR700	–	603-82
WR929	KR-R04	YHR750	ZB-954	604-82
WR949	KR-R05	YHR800	–	605-82
WR969	KR-R06	YHR850	ZB-954	606-82
WR989	KR-R07	YHR900	ZB-954	607-82
WR999	–	–	–	–

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ÉQUIVALENCE DE CONNECTEUR PARALLÈLE (suite)

Type WR – Street lighting compression connectors				
Blackburn	**Penn Union**	**Burndy**	**Homac**	**Kearney**
WR9	KO-R22	YP2A9U	–	421-8
WR139	KO-R24	YPC26R8U	–	–
WR502	–	–	–	–
Type CF – Copper compression tap connectors				
Blackburn	**Penn Union**	**Burndy**	**Homac**	**Kearney**
CF44-1	CDT-399-8	–	–	399-8
CFS44-1	CDT-301	–	–	–
CF22-1	CDT-398-8	–	–	398-8
CFS22-1	CDT-302	–	–	–
CF102-1	CDT-304-8	–	–	304-8
CF1010-1	CDT-303-8	–	–	303-8
CF202-1	–	–	–	–
CF2020-1	CDT-305-8	–	–	305-8
CF402-1	CDT-309-8	–	–	309-8
CF4010-1	CDT-308-8	–	–	308-8
CF4040-1	CDT-307-8	–	–	307-8
Type C – Compression connectors covers				
Blackburn	**Penn Union**	**Burndy**	**Homac**	**Kearney**
C2BB	–	–	CO20B	48480
C5-BB	–	CCO	CO20B	601O
C7	–	CCD	CD40B	601D
C9	–	CCN	CN600B	–
C9L	–	CCNL	CN600B	–

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

POTEAU ET TRAVERSE DE BOIS TRAITÉ

TRAVERSE DE BOIS TRAITÉ
CCA PRÉ-PERCÉE OU NON

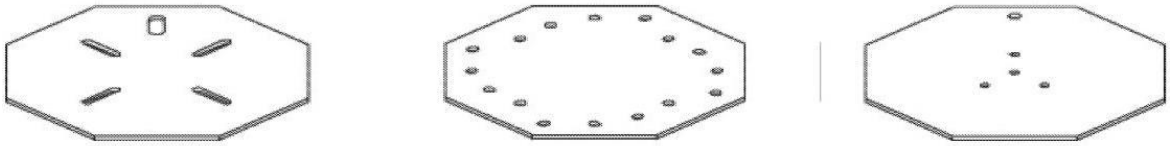

Type A Type B Type C

Fabriquées selon les spécifications d'Hydro-Québec

PLAQUE D'APPUI POUR POTEAU
GALVANISÉE À CHAUD

NUMÉRO	DIMENSIONS (MILLIMÈTRES)	TYPE	POIDS UNITAIRE (LBS)
2431423	900 x 900 x 10	A	138
2430035	1200 x 1200 x 10	A	245
2431421	762 x 762 x 10	B	99
1030965*	750 x 750 x 10	C	96

Les plaques sont fournies avec la quincaillerie suivante :

Deux (2) boulons à œil 5/8'' x 16'' avec écrous hexagonaux
Deux (2) boulons à œil 5/8'' x 20'' avec écrous hexagonaux
Quatre (4) vis tire-fond à pointe Fetter 5/8'' x 5'' ou 6''
Quatre (4) rondelles plates 2'' à trou de 7/8'' et 5/16 d'épaisseur

*Plaque de type C fournie seulement avec quatre (4) vis tire-fond de 5/8'' x 5''

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PRODUITS DE FIBRE DE VERRE

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

PRODUITS DE FIBRE DE VERRE

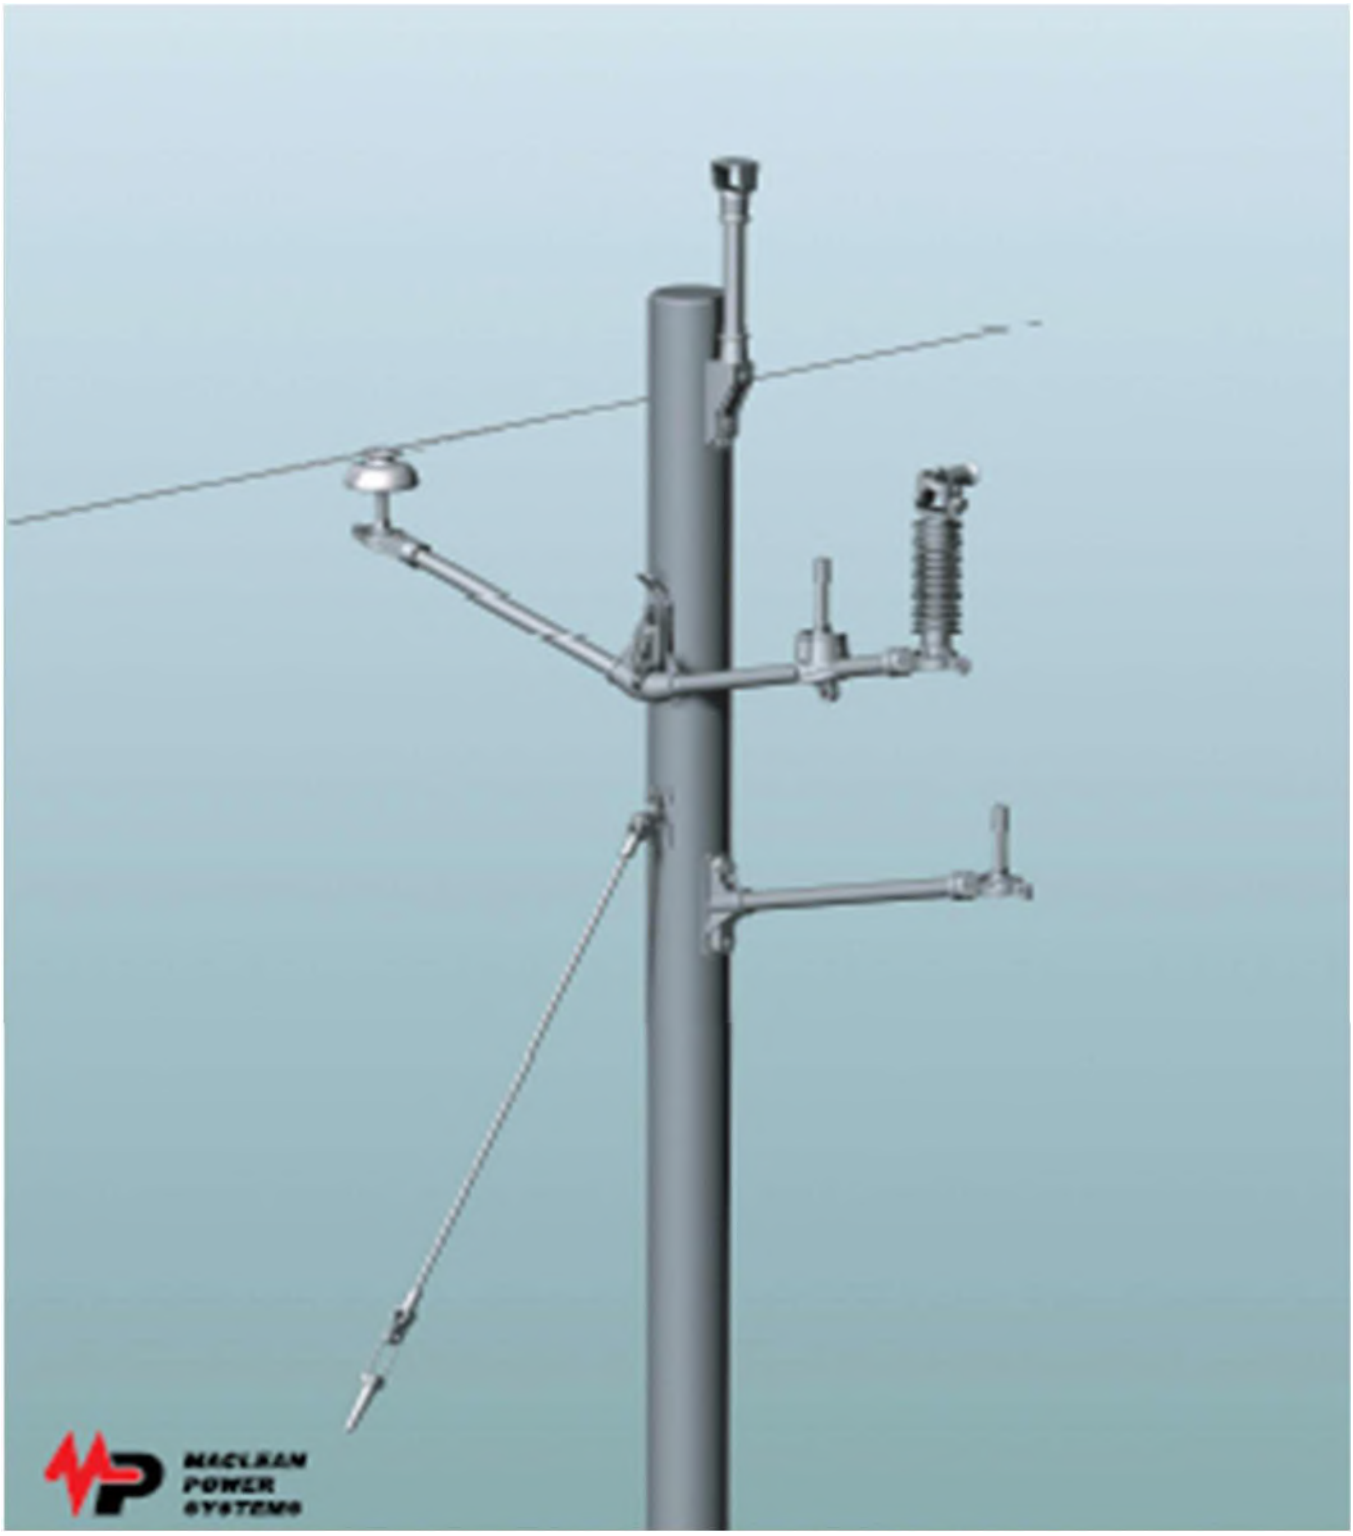

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

TIGE D'HAUBAN EN FIBRE DE VERRE

Catalog Numbering System

G	X	X	XX	-	X	X

End Fitting Types		
C	=	Clevis
TE	=	Thimble Eye
YC	=	Y-Clevis (except 15K lbs)

Minimum Ultimate Strength Rating (lbs)		
15	=	15,000
21	=	21,000
30	=	30,000
36	=	36,000

Length (L)

For standard lengths, see tables below

Custom lengths available, consult your sales representative for details

Roller

Omit to specify without roller(s)

R	=	Single roller
R2	=	Roller each end (Clevis-Clevis only)

*For 50,000 lb and 80,000 lb guy strain insulator options, see page FG-5.

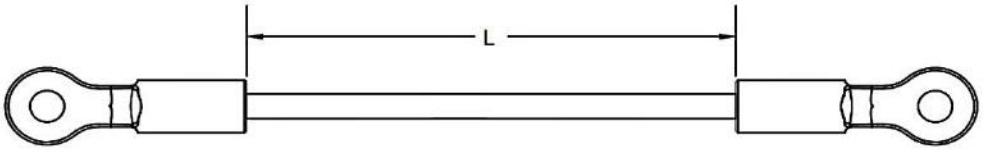

Example

- 78" Guy Strain Insulator
- Clevis - Clevis end fittings
- 15,000 Lb minimum ultimate strength rating
- Roller on each end

Catalog Number - GCC15-78R2

15,000 Lb Minimum Ultimate Strength Rating		
Catalog Number		Length (In)
Clevis-Clevis	Clevis-Thimble Eye	
GCC15-12R	GCTE15-12R	12
GCC15-18R	GCTE15-18R	18
GCC15-24R	GCTE15-24R	24
GCC15-36R	GCTE15-36R	36
GCC15-42R	GCTE15-42R	42
GCC15-54R	GCTE15-54R	54
GCC15-78R	GCTE15-78R	78
GCC15-96R	GCTE15-96R	96
GCC15-120R	GCTE15-120R	120
GCC15-144R	GCTE15-144R	144

21,000 Lb Minimum Ultimate Strength Rating		
Catalog Number		Length (In)
Clevis-Clevis	Clevis-Thimble Eye	
GCC21-12R	GCTE21-12R	12
GCC21-18R	GCTE21-18R	18
GCC21-24R	GCTE21-24R	24
GCC21-36R	GCTE21-36R	36
GCC21-42R	GCTE21-42R	42
GCC21-54R	GCTE21-54R	54
GCC21-60R	GCTE21-60R	60
GCC21-78R	GCTE21-78R	78
GCC21-90R	GCTE21-90R	90
GCC21-96R	GCTE21-96R	96
GCC21-120R	GCTE21-120R	120
GCC21-144R	GCTE21-144R	144

30,000 Lb Minimum Ultimate Strength Rating		
Catalog Number		Length (In)
Clevis-Clevis	Clevis-Thimble Eye	
GCC30-24R	GCTE30-24R	24
GCC30-36R	GCTE30-36R	36
GCC30-42R	GCTE30-42R	42
GCC30-54R	GCTE30-54R	54
GCC30-78R	GCTE30-78R	78
GCC30-96R	GCTE30-96R	96
GCC30-120R	GCTE30-120R	120
GCC30-144R	GCTE30-144R	144

36,000 Lb Minimum Ultimate Strength Rating		
Catalog Number		Length (In)
Clevis-Clevis	Clevis-Thimble Eye	
GCC36-18R	GCTE36-18R	18
GCC36-54R	GCTE36-54R	54
GCC36-60R	GCTE36-60R	60
GCC36-78R	GCTE36-78R	78
GCC36-90R	GCTE36-90R	90
GCC36-120R	GCTE36-120R	120
GCC36-144R	GCTE36-144R	144

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

TRAVERSE DE FIBRE

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

TRAVERSE DE FIBRE (suite)

Single, Double & Triple Phase Brackets

G | | | | | | | | | | | | | | |

# of Phases
1 = Single Phase
2 = Double Phase
3 = Triple Phase

Rating Class (Rod Diameter)
M = Medium (1 1/2")
H = Heavy (2")
X= Extra Heavy (2 1/2")

Base (3 digits)

Material (1st digit)	Type (2nd digit)	Style (3rd digit)
A = Aluminum D = Ductile Iron	0 = 0° Standoff A = 15° Standoff V = 15° Vertical Standoff (3 phase only) J = Jumper Pin R = Ridge Pin	*Reference Base Index for Style Numbers*

Length (in) - (2 or 4 digits)

2 Digit Brackets	4 Digit Brackets
Single Phase (1) & Double Phase (2) brackets except: Jumper pins (J) & Brackets with adapters	*Triple Phase (3) Brackets:* *Lengths - Outer then middle* *Ex - G3MA014824ADB* *(48" outer & 24" middle lengths)* *Jumper Pins (J):* *Lengths - Overall then stud* *Ex - G1MAJ21204AS1* *(12" length & 4" stud)* *Brackets with adapter(s):* *Lengths - Overall then adapter* *Ex - G1HDA33814DV1* *(38" length & 14" adapter length)*

Options
A = Adapter #
See Adapter Index
B = Standard Hardware
BC = B + SC
BX = Boxed
C# = Customer Unique
D = Date Code
E = Different Angled End
F = B + Flat Washer
G = 3/8" Grounding Hole
H = Stainless Hardware
P# = Insulator Pin#
See Options Index
R = Wood Crate
S = Strap
SB = B + S
SC = Silicone Coating
T = B + S + SC
W = B + Star Washer
WC = W + SC
X = Extra hardware

End Fitting (2 or 3 digits)

Material (1st digit)	Type (2nd digit)	Thread (3rd digit)
A = Aluminum D = Ductile Iron M = A + D	Cut-Out / Arrestor: A = 15° Single Apparatus B = 15° Tangent Messenger C = 0° or 15° Single Ear D = 0° or 15° Double Ear G = 15° Triple Ear (Old Style) K = 15° SCADA Bracket T = 15° Triple Ear Other: E = Suspension Eye F = Fiber Optics H = Horizontal Post Insulator P = Post Insulator with Integral Stud U = 15° Universal Pin (3rd digit): L = 15° Vertical (Long shank) M = Straight w/ side eye S = Straight V = 15° Vertical Combination (3rd digit): X = S + E (Double Phase) Y = S + V (Double Phase) S + 2V (Triple Phase)	1 = 1" Plastisol 3 = 1 3/8" Plastisol 5 = 1" Nylon 6 = 1 3/8" Nylon *Thread #2 and #4 (lead) were made obsolete.*

Standard Materials:
Aluminum: A356-T6
Ductile Iron: Grade 65-45-12 with hot dip galvanized per ASTM A153
Steel: Grade A36 with hot dip galvanized per ASTM A153
Rod: Fiberglass
Hardware: Steel with hot dip galvanized per ASTM A153
Coating: Polyurethane with ultra-violet protection, MPS gray
SC option - Vulcanized silicone rubber, gray

NOTE:
Product specifications are subject to continuous improvement and may be changed at any time without notification

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

TRAVERSE DE FIBRE (suite)

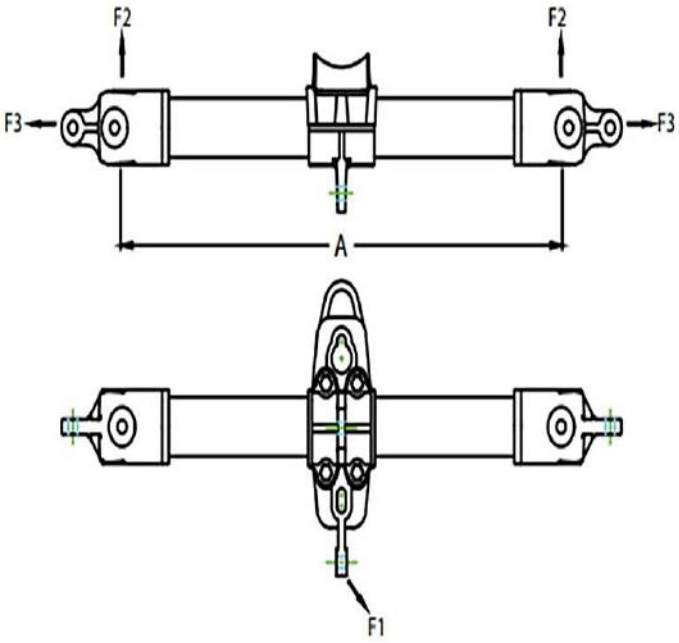

Round Deadend Crossarm

Features

- Accepts 5/8" mounting hardware
- Recessed cavity in base to allow double nutting for back to back mounting
- Keyhole for installation ease on top bolt

Material

Base:	Ductile iron, hot dip galvanized ASTM A-153
End Fitting:	Aluminum A356-T6
Rod:	Fiberglass, gray ultraviolet (UV) protective coating

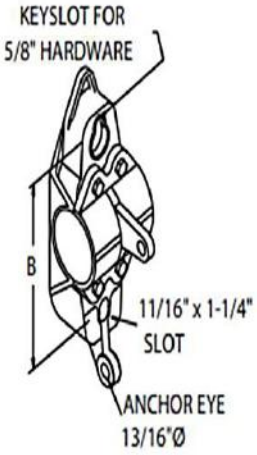

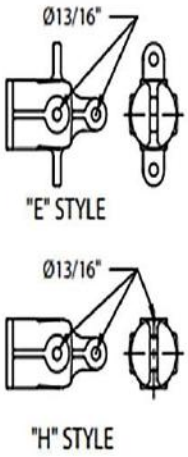

Catalog Number	Dimensions (In)		Min. Ultimate Load (lbs)			Bolt Spacing B	Rod or Tube	Weight Ea (Lbs)
	A	D	F2 Long	F3 Trans	F1 Anchoring Eye			
GDAS36H	36	3.0	12000	10000	25000	8	Rod	34.1
GDAS42H	42	3.0	10000	10000	25000	8	Rod	37.3
GDAS48H	48	3.0	9500	10000	25000	8	Rod	40.4
GDAS54H	54	3.0	9000	10000	25000	8	Rod	43.6
GDAS60H	60	3.0	8500	10000	25000	8	Rod	46.7

Notes:

1) Lengths shown are considered standard; for other lengths, consult factory
2) For end fitting with side eyes, replace suffix "H" with "E"
3) Add "SC" for silicone coated rod (harsh environments)
4) For other options, thread sizes and optional bases and end fitting, reference Fiberglass Catalog Numbering System Matrix

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

PARAFOUDRE SECONDAIRE

SURGETEC

NUMÉRO MACLEAN	VOLTAGE MCOV	POLES	ENERGY CAP. (JOULES/PHASE)	FRONT-OF-WAVE PROTECTION LEVEL (kV CREST)	1.5kA	5.0kA	10kA
Z1-175-0	175	1	300	1.21	.747	.954	1.271
Z2-175-0	175	2	300	1.21	.747	.954	1.271
Z3-175-0	175	3	300	1.21	.747	.954	1.271
Z1-480-0	480	1	500	1.900	1.417	1.761	2.160
Z2-480-0	480	2	500	1.900	1.417	1.761	2.160
Z3-480-0	480	3	500	1.900	1.417	1.761	2.160
Z1-650-0	650	1	700	2.48	2.009	2.439	2.850
Z2-650-0	650	2	700	2.48	2.009	2.439	2.850
Z3-650-0	650	3	700	2.48	2.009	2.439	2.850

Ajouter un « A » au numéro pour le support de montage
Produit non approuvé CSA ou cUL.

DITEK

NUMÉRO DITEK	SERVICE VOLTAGE	VOLTAGE MCOV	POLES	ENERGY CAP. (AMPÈRE/PHASE)
DTK-120/240CM+	120/240VAC	130/260	2	36000
DTK-6003CMXPLUS	600VAC	880	3	75000

Produit non approuvé CSA, mais approuvé cUL.

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PARAFOUDRE DE DISTRIBUTION EN POLYMÈRE

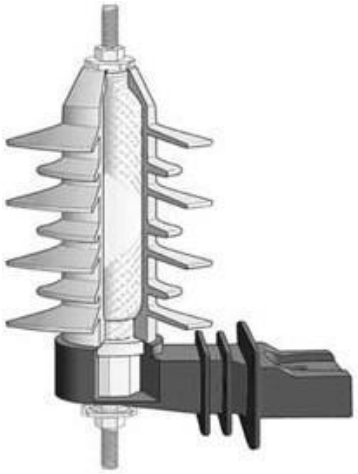

ZHP 'Heavy Duty' CARACTÉRISTIQUES DE PROTECTION											
NUMÉRO	VOLTAGE (kV rms)	MCOV (Uc) (kVrms)	EQUIVALENT F.O.W. kV (CREST)	SWITCHING SURGE kV (CREST)	DISCHARGE VOLTAGE (1.5kA)	DISCHARGE VOLTAGE (2.5kA)	DISCHARGE VOLTAGE (3kA)	DISCHARGE VOLTAGE (5kA)	DISCHARGE VOLTAGE (10kA)	DISCHARGE VOLTAGE (20kA)	DISCHARGE VOLTAGE (40kA)
ZHP003	3	2.55	11.5	7.5	8.4	8.6	8.7	9.2	10.2	11.6	13.7
ZHP006	6	5.1	23.4	15.1	17.1	17.5	17.7	18.8	20.7	23.6	27.7
ZHP009	9	7.65	33.5	21.6	24.4	25.0	25.4	26.8	29.6	33.8	39.7
ZHP010	10	8.4	36.3	23.5	26.5	27.2	27.5	29.1	32.1	36.6	43.0
ZHP012	12	10.2	43.5	28.2	31.8	32.6	33.0	34.9	38.5	44.0	51.6
ZHP015	15	12.7	54.2	35.0	39.5	40.5	41.0	43.4	47.9	54.7	64.2
ZHP018	18	15.3	65.6	42.4	47.8	49.1	49.7	52.6	58.0	66.2	77.7
ZHP021	21	17.0	70.2	45.4	51.2	52.5	53.2	56.3	62.1	70.9	83.2
ZHP024	24	19.5	87.9	56.8	64.1	65.7	66.6	70.4	77.7	88.7	104.1
ZHP027	27	22.0	98.7	63.8	72.0	73.9	74.8	79.1	87.3	99.7	117.0
ZHP030	30	24.4	109.6	70.9	79.9	82.0	83.0	87.8	96.9	110.6	129.9
ZHP036	36	29.0	131.3	84.9	95.8	98.2	99.5	105.2	116.1	132.6	155.6

Contactez-nous pour d'autres options.

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PARAFOUDRE INTERMÉDIAIRE EN POLYMÈRE

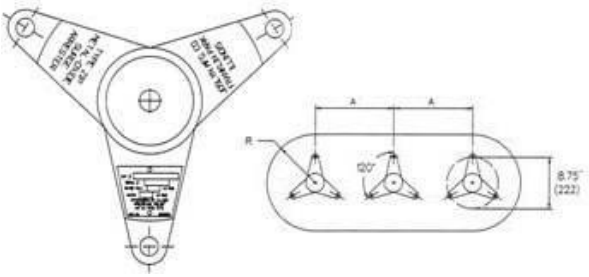

ZIP CARACTÉRISTIQUES DE PROTECTION											
NUMÉRO	VOLTAGE (Ur) (kV rms)	MCOV (Uc) (kVrms)	EQUIVALENT F.O.W. kV (CREST)	SWITCHING SURGE kV (CREST)	DISCHARGE VOLTAGE (1.5kA)	DISCHARGE VOLTAGE (2.5kA)	DISCHARGE VOLTAGE (3kA)	DISCHARGE VOLTAGE (5kA)	DISCHARGE VOLTAGE (10kA)	DISCHARGE VOLTAGE (20kA)	DISCHARGE VOLTAGE (40kA)
ZIP0003-	3	2.55	9.28	7.01	7.58	7.77	7.96	8.24	8.80	9.46	10.68
ZIP0006-	6	5.1	17.41	13.15	14.21	14.57	14.92	15.44	16.50	17.74	20.03
ZIP0009-	9	7.65	25.69	20.16	21.80	22.34	22.88	23.68	25.30	27.20	30.71
ZIP0010-	10	8.4	29.12	21.99	23.78	24.38	24.96	25.83	27.60	29.67	33.51
ZIP0012-	12	10.2	34.81	26.29	28.43	29.15	29.85	30.88	33.00	35.48	40.06
ZIP0015-	15	12.7	43.67	32.98	35.67	36.56	37.44	38.74	41.40	44.51	50.26
ZIP0018-	18	15.3	52.22	39.44	42.64	43.72	44.77	46.32	49.50	53.21	60.09
ZIP0021-	21	17	58.23	43.98	47.55	48.75	49.92	51.66	55.20	59.34	67.01
ZIP0024-	24	19.5	66.78	50.43	54.53	55.91	57.25	59.24	63.30	68.05	76.85
ZIP0027-	27	22	75.64	57.12	61.77	63.33	64.85	67.10	71.70	77.08	87.04
ZIP0030-	30	24.4	84.18	63.58	68.75	70.18	72.17	74.68	79.80	85.79	96.88
ZIP0033-	33	26.7	93.04	70.27	75.98	77.90	79.77	82.54	88.20	94.82	107.07
ZIP0036-	36	29	101.59	76.72	82.96	85.05	87.09	90.12	96.30	103.52	116.91
ZIP0039-	39	31.5	110.45	83.41	90.20	92.47	94.69	97.98	104.70	112.55	127.11
ZIP0042-	42	34	116.14	87.72	94.85	97.24	99.57	103.03	110.10	118.36	133.66
ZIP0045-	45	36.5	125.01	94.41	102.09	104.66	107.17	110.89	118.50	127.39	143.86
ZIP0048-	48	39	136.56	103.13	11.52	114.33	117.07	121.14	129.45	139.16	157.15
ZIP0054-	54	42	153.38	115.84	125.26	128.42	131.50	136.07	145.40	156.31	176.52
ZIP0060-	60	48	165.97	125.34	135.54	138.95	142.29	147.23	157.33	169.13	191.00
ZIP0066-	66	54	182.79	138.04	149.27	153.03	156.71	162.15	173.27	186.27	210.35
ZIP0072-	72	57	196.38	148.31	160.38	164.42	168.36	174.21	186.16	200.12	226.00
ZIP0084-	84	68	232.13	175.31	189.57	194.35	199.01	205.92	220.05	236.55	267.14
ZIP009-	90	70	249.01	188.06	203.36	208.48	213.48	220.90	236.05	253.75	286.56
ZIP006-	96	76	265.76	200.71	217.04	222.50	227.85	235.76	251.93	270.82	305.84
ZIP0108-	108	84	295.17	222.92	241.06	247.13	253.06	261.85	279.81	300.80	339.69
ZIP0120-	120	98	331.89	250.66	271.05	277.87	284.54	294.42	314.62	339.22	381.95
ZIP0132-	132	106	365.51	276.05	298.50	306.02	313.37	324.25	346.49	372.48	420.64
ZIP0144-	144	115	392.90	296.73	320.87	328.95	336.84	348.54	372.45	400.38	452.15

Contactez-nous pour d'autres options.

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PARAFOUDRE STATION EN POLYMÈRE



ZSP CARATÉRISTIQUES DE PROTECTION													
NUMÉRO	VOLTAGE (kV rms)	MCOV (kV)	TOV (1 s kV rms)	TOV (10 s kV rms)	EQUIV. F.O.W. kV (CREST)	SWITCHING SURGE kV (CREST)	DISCHARGE VOLTAGE (1.5kA)	DISCHARGE VOLTAGE (2.5kA)	DISCHARGE VOLTAGE (3kA)	DISCHARGE VOLTAGE (5kA)	DISCHARGE VOLTAGE (10kA)	DISCHARGE VOLTAGE (20kA)	DISCHARGE VOLTAGE (40kA)
ZSP0003-	3	2.55	3.90	3.48	9.15	7.24	7.55	7.76	7.86	8.13	8.6	9.15	10.17
ZSP0006-	6	5.10	7.81	6.96	18.30	14.48	15.11	15.52	15.73	16.25	17.20	18.30	20.33
ZSP0009-	9	7.65	11.71	10.44	26.60	21.05	21.96	22.56	22.86	23.63	25.00	26.60	29.55
ZSP0010-	10	8.40	12.86	11.46	29.15	23.07	24.06	24.72	25.06	25.89	27.40	29.15	32.39
ZSP0012-	12	10.20	15.62	13.92	33.75	28.29	29.51	30.32	30.73	31.75	33.60	35.74	39.72
ZSP0015-	15	12.70	19.44	17.33	43.73	34.61	36.09	37.08	37.59	38.84	41.10	43.72	48.58
ZSP0018-	18	15.30	23.43	20.88	53.09	42.02	43.82	45.02	45.63	47.16	49.9	53.08	58.98
ZSP0021-	21	17.00	26.03	23.20	58.30	46.14	48.13	49.45	50.11	51.79	54.80	58.30	64.77
ZSP0024-	24	19.50	29.86	26.61	67.66	53.55	55.85	57.39	58.16	60.10	63.60	67.66	75.18
ZSP0027-	27	22.00	33.69	30.02	76.81	60.79	63.41	65.15	66.03	68.23	72.20	76.81	85.34
ZSP0030-	30	24.40	37.36	33.30	84.79	67.11	69.99	71.91	72.89	75.32	79.90	84.78	94.21
ZSP0033-	33	26.70	40.88	36.44	92.67	73.34	76.49	78.59	79.65	82.31	87.10	92.66	102.95
ZSP0036-	36	29.00	44.41	39.57	101.95	80.66	84.13	86.44	87.61	90.53	95.80	101.91	113.24
ZSP0039-	39	31.50	48.23	42.99	110.01	87.06	90.81	93.3	94.56	97.71	103.4	110.00	122.22
ZSP0042-	42	34.00	52.06	46.40	123.09	97.42	101.61	104.40	105.81	109.34	115.7	123.08	136.76
ZSP0045-	45	36.50	55.89	49.81	128.41	101.63	106.00	108.91	110.358	114.06	120.70	128.40	142.97
ZSP0048-	48	39.00	59.72	53.22	135.01	106.85	111.44	114.50	116.05	119.92	126.90	135.00	150.00
ZSP0054-	54	42.00	64.31	57.31	152.14	120.41	125.58	129.03	130.77	135.14	143.00	152.12	169.03
ZSP0060-	60	48.00	73.50	65.50	169.59	134.21	139.99	143.83	145.77	150.63	159.40	169.57	188.41
ZSP0063-	63	50.25	76.95	68.57	176.08	139.35	145.34	149.33	151.35	156.40	165.50	176.06	195.62
ZSP0066-	66	52.50	80.39	71.64	185.23	146.59	152.89	157.09	159.21	164.52	174.10	185.21	205.79
ZSP0072-	72	57.00	87.29	77.78	203.85	161.33	168.26	172.88	175.22	181.06	191.60	203.82	226.47
ZSP0072—58	0072-58	58.00	88.82	79.15	203.85	161.33	168.26	172.88	175.22	181.06	191.60	203.82	226.47
ZSP0090-	90	70.00	107.19	95.52	246.08	194.75	203.13	208.70	211.52	218.58	231.30	246.06	273.40
ZSP0090-74	0090-74	74.00	113.32	100.98	256.83	203.26	212.00	217.82	220.76	228.12	241.40	256.80	285.33
ZSP0096-	96	76.00	116.38	103.71	263.42	208.48	217.44	223.41	226.43	233.96	247.60	263.40	292.66
ZSP0108-	108	84.00	128.63	114.63	288.52	228.35	238.17	244.70	248.01	256.28	271.20	288.50	320.56
ZSP0108-88	0108-88	88.00	134.76	120.09	304.28	240.81	251.17	258.06	261.55	270.27	286.00	304.25	338.05
ZSP0120-	120	98.00	150.07	133.73	339.07	268.35	278.88	287.56	291.45	301.17	318.70	339.03	376.70
ZSP0120-102	0120-102	102.00	156.20	139.19	349.39	276.51	288.40	296.32	300.32	310.34	328.40	349.35	388.17
ZSP0132-	132	106.00	162.33	144.65	365.56	289.31	304.75	310.03	314.22	324.70	343.60	365.52	406.14
ZSP0144-	144	115.00	176.11	156.93	405.03	320.55	334.33	343.51	348.15	359.76	380.70	404.99	449.99
ZSP0150-	150	121.00	185.30	165.12	432.8	342.53	357.25	367.06	372.02	384.43	406.80	432.75	480.84
ZSP0168-	168	131.00	200.61	178.77	473.46	374.94	391.06	401.79	407.23	420.81	445.30	473.71	526.34
ZSP0172-	172	140.00	214.39	191.05	484.61	383.53	400.02	411.00	416.55	430.45	455.5	484.56	538.40
ZSP0180-	180	144.00	220.52	196.51	496.95	393.30	410.21	421.46	427.16	441.41	467.10	496.90	552.11
ZSP0192-	192	152.00	232.77	207.42	528.44	418.22	436.20	448.17	454.23	469.38	496.70	528.39	587.10
ZSP0198-	198	160.00	245.02	218.34	557.17	440.96	459.91	472.53	478.92	494.90	523.70	557.11	619.01
ZSP0210-	210	170.00	260.34	231.99	584.94	462.93	482.83	496.08	502.79	519.56	549.8	584.88	649.86
ZSP0216-	216	174.00	266.46	237.44	600.68	475.39	495.83	509.44	516.33	533.55	564.60	600.62	667.36

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

COUPE-CIRCUIT
POLYMÈRE

NUMÉRO (POLYMÈRE)	VOLTAGE NOMINAL (kV)	VOLTAGE MAX. (kV)	BIL	COURANT CONTINU (Amps, RMS)	CAPACITÉ DE RUPTURE (Asym.) (Amp, RMS)	LONGUEUR APPROX. TUBE (PO)	DISTANCE DE FUITE À LA TERRE (PO)	TUBE OU LAME SEULEMENT	COUPE-CIRCUIT SANS TUBE OU LAME
SC15HG110-D	14.4	15	110	100	10,000	11.3	14.8	89521R10	SC15HG-D
SC15HG116-D	14.4	15	110	100	16,000	11.3	14.8	89531R10	SC15HG-D
SC15HG212-D	14.4	15	110	200	12,000	11.3	14.8	89571R11	SC15HG-D
SC15HG300-D	14.4	15	110	300	Lame	11.3	14.8	89621R10	SC15HG-D
SC27SG108-D	25	27	150	100	8,000	14.8	19.0	89522R10	SC27SG-D
SC27SG112-D	25	27	150	100	12,000	14.8	19.0	89532R10	SC27SG-D
SC27SG210-D	25	27	150	200	10,000	14.8	19.0	89572R11	SC27SG-D
SC27SG300-D	25	27	150	300	Lame	14.8	19.0	89622R10	SC27SG-D
SC27XG112-D	25	27	170	100	12,000	18.3	35.4	89533R10	SC27XG-D
SC27XG300-D	25	27	170	300	Lame	18.3	35.4	89623R10	SC27XG-D
SC38HG300-D	36	38	170	300	Lame	18.3	35.4	89623R10	SC38HG-D

Ajouter « LB » au numéro pour l'ajout d'un casse-fusible

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

COUPE-CIRCUIT (suite)
PORCELAINE

NUMÉRO (PORCELAINE)	VOLTAGE NOMINAL (kV)	VOLTAGE MAX. (kV)	BIL	COURANT CONTINU (Amps, RMS)	CAPACITÉ DE RUPTURE (Asym.) (Amp, RMS)	LONGUEUR APPROX. TUBE (PO)	DISTANCE DE FUITE À LA TERRE (PO)	TUBE OU LAME SEULEMENT	COUPE-CIRCUIT SANS TUBE OU LAME
89021R10-D	14.4	15	110	100	10,000	11.25	8.5	89521R10	89811R10-D
89031R10-D	14.4	15	110	100	16,000	11.25	8.5	89531R10	89811R10-D
89071R11-D	14.4	15	110	200	12,000	11.25	8.5	89571R11	89811R10-D
89221R10-D	14.4	15	110	300	12,000	11.25	8.5	89621R10	89811R10-D
89022R10-D	25	27	125	100	8,000	14.75	11	89522R10	89812R10-D
89032R10-D	25	27	125	100	12,000	14.75	11	89522R10	89812R10-D
89072R11-D	25	27	125	200	10,000	14.75	11	89572R11	89812R10-D
89222R10-D	25	27	125	300	12,000	14.75	11	89622R10	89812R10-D
89042R10-D	25	27	150	100	8,000	14.75	17	89522R10	89802R10-D
89052R10-D	25	27	150	100	12,000	14.75	17	89532R10	89802R10-D
89092R11-D	25	27	150	200	10,000	14.75	17	89572R11	89802R10-D
89053R10-D	25	27	170	100	12,000	18.25	26	89533R10	89823R10-D
89253R10-D	25	27	170	300	12,000	18.25	26	89623R10	89823R10-D

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ÉLÉMENT FUSIBLE (FUSELINK)

Tête amovible / 23'' long / 27kV max.
Tête non-amovible : remplacer FL3 par FL11
D'autres modèles et 26'' disponibles

COURANT (Ampères)	TYPE D (Très lente)	TYPE K (Vite)	TYPE T (Lente)
1	FL3D1	FL3K1	FL3T1
1,5	FL3D105		
2	FL3D2	FL3K2	FL3T2
3	FL3T3	FL3K3	FL3T3
4	FL3D4		
5	FL3D5	FL3K5	FL3T5
6		FL3K6	FL3T6
7	FL3D7		
8		FL3K8	FL3T8
10	FL3D10	FL3K10	FL3T10
12		FL3K12	FL3T12
15	FL3D15	FL3K15	FL3T15
20	FL3D20	FL3K20	FL3T20
25		FL3K25	FL3T25
30		FL3K30	FL3T30
40		FL3K40	FL3T40
50		FL3K50	FL3T50
65		FL3K65	FL3T65
80		FL3K80	FL3T80
100		FL3K100	FL3T100
140		FL3K140	FL3T140
200		FL3K200	FL3T200

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

COUDÉES ET ACCESSOIRES 15/25/35 kV

(LOADBREAK/DEADBREAK ELBOW AND BUSHING) (15/25/35 kV)

I

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

RÉENCLENCHEUR ET SECTIONNEUR

POUR CONDENSATEURS

NOVA15, 27 ET 38

SECTIONNEUR TRIPHASÉ M-FORCE

VWVE15, 27 ET 38

SECTIONNEUR MONOPHASÉ

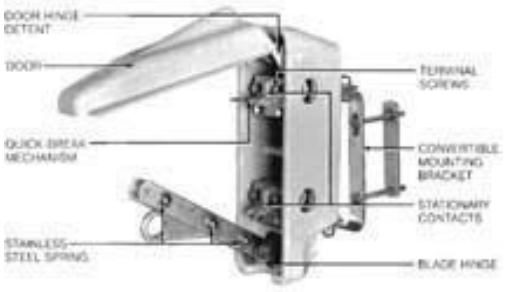

SECTIONNEUR ENCAPSULÉ

SECTIONNEUR DE CONTOURNEMENT (BY PASS)

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

TRANSFORMATEUR

SUR SOCLE MONOPHASÉ

SUR SOCLE TRIPHASÉ

DE POTEAU

RÉGULATEUR DE TENSION

DE POSTE

DE COURANT (CT)

DE POTENTIEL (PT)

CONDENSATEURS

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ISOLATEUR D'ANCRAGE

NUMÉRO	CLASSE ANSI	FORCE (LBS)	DIAMÈTRE CÂBLE
VI 4602	54-1	10 000	3/8
VI 4604	54-2	12 000	1/2
VI 4606	54-3	20 000	5/8
VI 4656	54-4	20 000	5/8

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ISOLATEUR BOBINE

POLYMÈRE

NUMÉRO	CLASSE ANSI	HAUTEUR (PO)
HPI-53-2	53-2	3

PORCELAINE

NUMÉRO	CLASSE ANSI	HAUTEUR (PO)
DP53-1	53-1	2-1/8
J151	53-2	3
VI 2613	53-3	3-3/16
VI 2614	53-5	4-1/8
VI 2626	53-4	3

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ISOLATEUR À TIGE



55-1



55-2



55-3



55-4

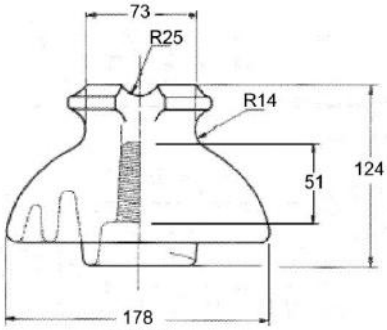

55-5

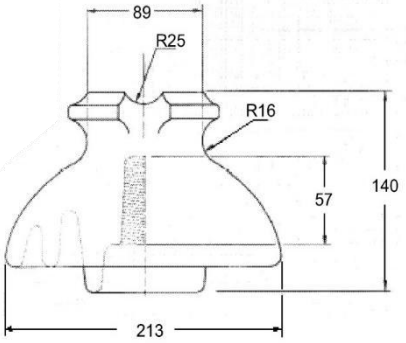

55-6

ISOLATEUR DE DISTRIBUTION – POUR TIGE 1''
PORCELAINE

CLASSE ANSI	NUMÉRO	VOLTAGE NOMINAL (kV)	POIDS UNITAIRE (LBS)
55-1	PI22041	4,8	1,10
55-2	PI220181	7,3	1,28
55-3	PI23132	13	2,69
55-4	PI23152	15	3,68
55-5	PI23253	15/25	6,39
55-6	PI23254	15/25	10,47

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ISOLATEUR À TIGE (suite)

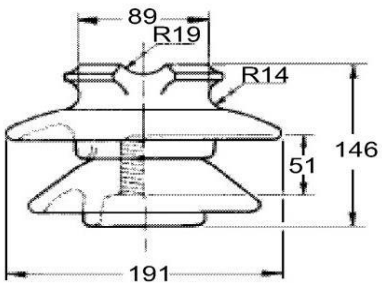

56-1

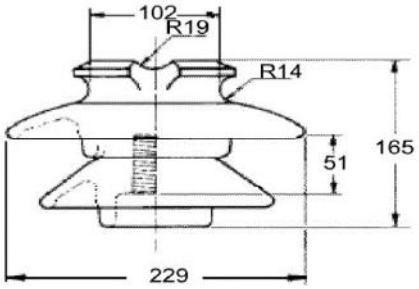

56-2

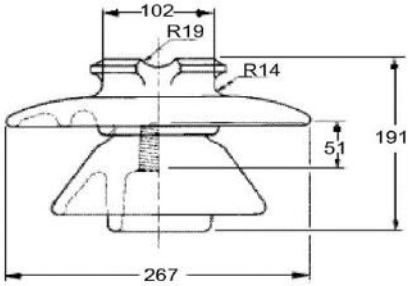

56-3

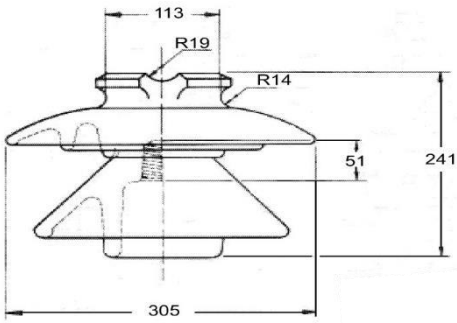

56-4

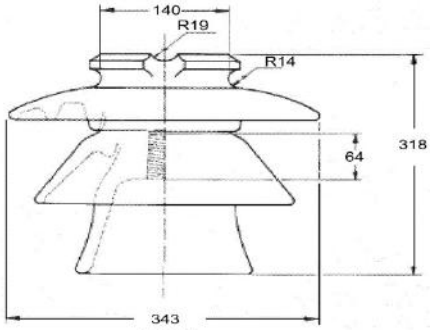

56-5

ISOLATEUR DE DISTRIBUTION – POUR TIGE 1-3/8''
PORCELAINE

CLASSE ANSI	NUMÉRO	VOLTAGE NOMINAL (kV)	POIDS UNITAIRE (LBS)
56-1	PI43231	25	8,27
56-2	PI43272	25	11,75
56-3	PI43353	38	16,89
56-4	PI43444	46	18,74
56-5	P153696	69	36,27

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ISOLATEUR DE SUSPENSION

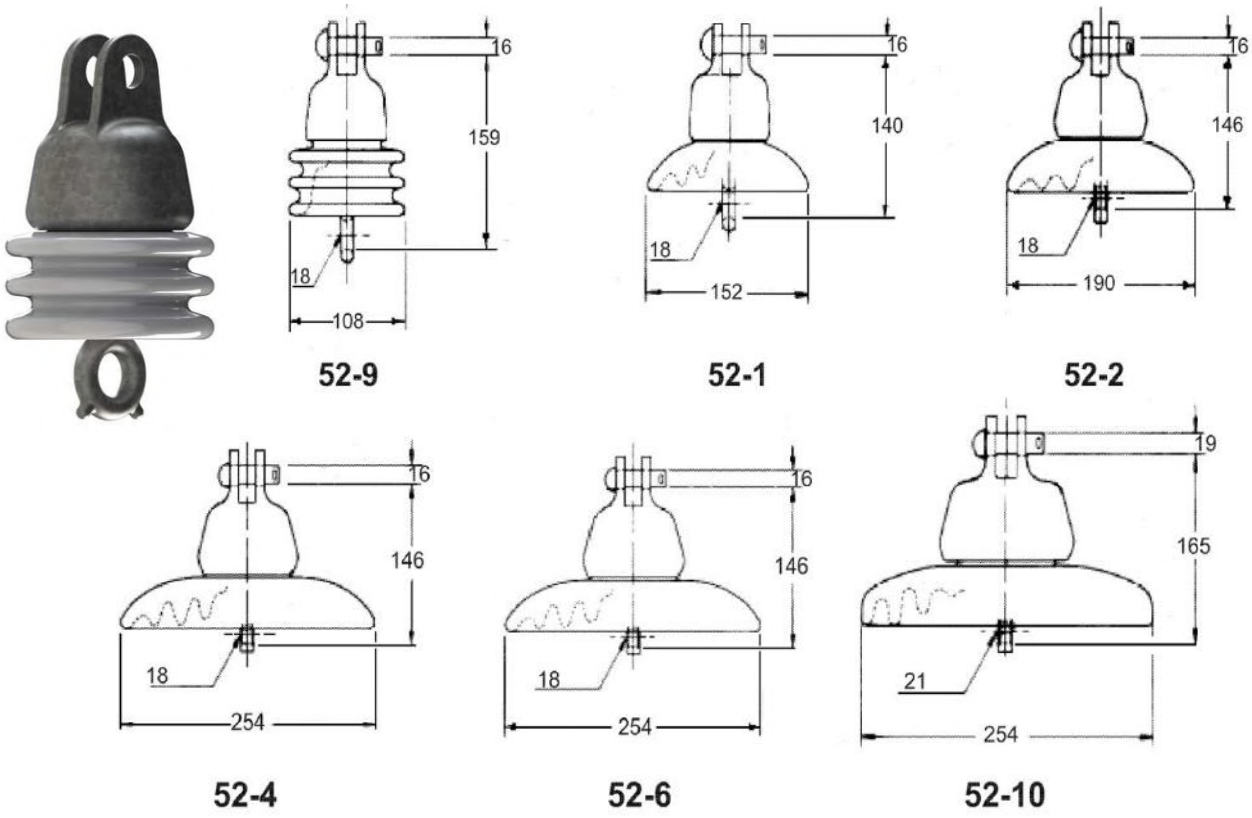

ISOLATEUR DE SUSPENSION – CHAPE À ŒIL PORCELAINE

CLASSE ANSI	NUMÉRO	CAPACITÉ MÉC. & ÉLECT. (kN)	POIDS UNITAIRE (LBS)
52-9	DI02C12	45	4,4
52-1	DI11C12	45	4,8
52-2	DI22C23	67	7,4
52-4	DI32C33	67	14,4
52-6	DI32C35	111	14,7
52-10	DI32C37	160	15

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ISOLATEUR DE SUSPENSION (suite)

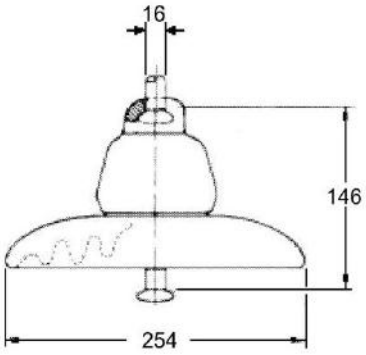

52-3

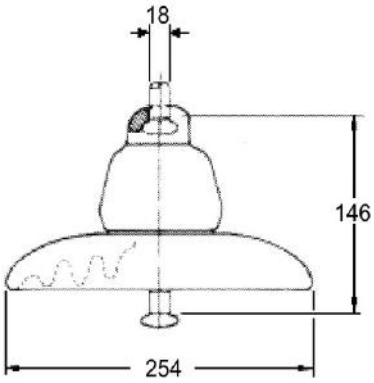

52-5

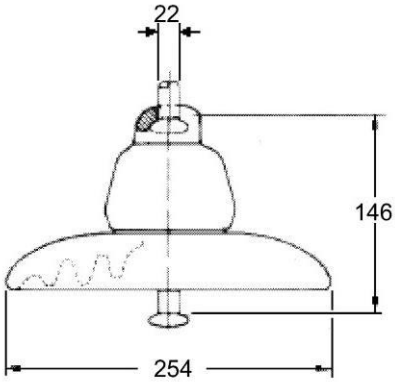

52-8

ISOLATEUR DE SUSPENSION – GENOUILLÈRE À ROTULE PORCELAINE

CLASSE ANSI	NUMÉRO	CAPACITÉ MÉC. & ÉLECT. (kN)	POIDS UNITAIRE (LBS)
52-3	DI33C33	67	14,3
52-5	DI33C36	111	14,7
52-8	DI33C37	160	14,7

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ISOLATEUR CAPOT-EMBASE

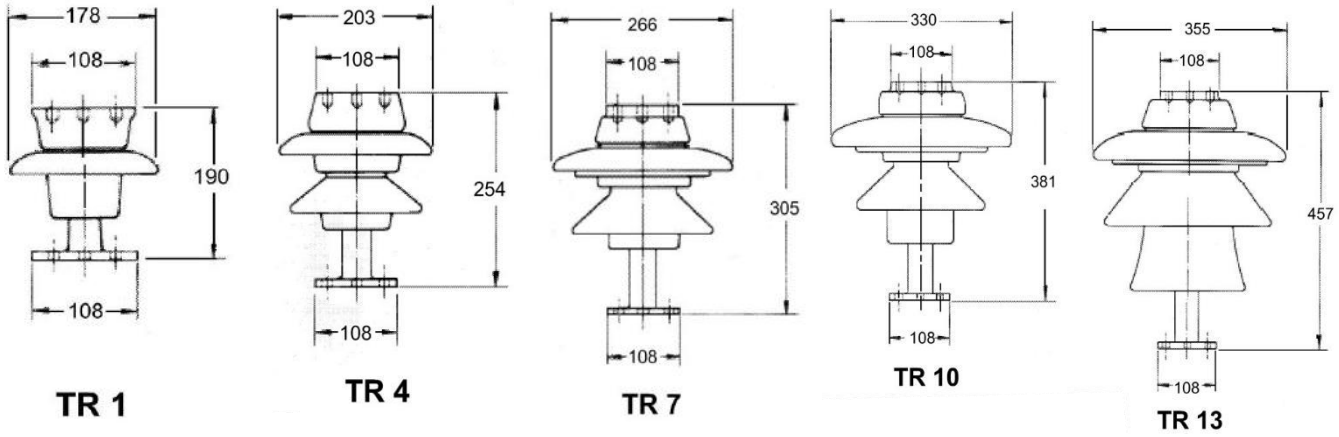

ISOLATEUR CAPOT ET EMBASE PORCELAINE

CLASSE ANSI	NUMÉRO	BIL (kV)	POIDS UNITAIRE (LBS)
TR 1	PE11081	95	13,78
TR 4	PE11151	110	18,36
TR 7	PE11251	150	26,46
TR 10	PE11351	200	46,3
TR 13	PE11451	250	61,73
TR 147	PE11691	190	50,71
TR 16	HB350	350	2 x TR147

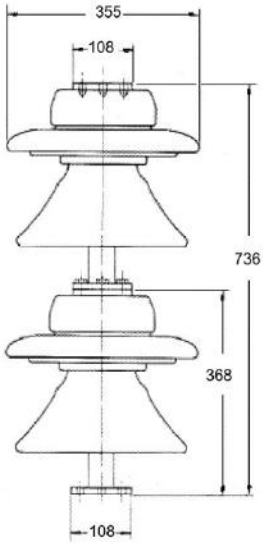

1 x unité : TR 147
2 x unités :TR 16

CERCLE DE BOULONNAGE – 3''

	IEC/ABNT	ANSI*
Capot 4 trous filetés	M12 x 16 mm	1/2'' – 13UNC
Embase 4 trous	Diam. 15 mm	Diam. 9/16''

*Ajouter « A » au numéro de pièce pour des filets ANSI

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ISOLATEUR CAPOT-EMBASE (suite)

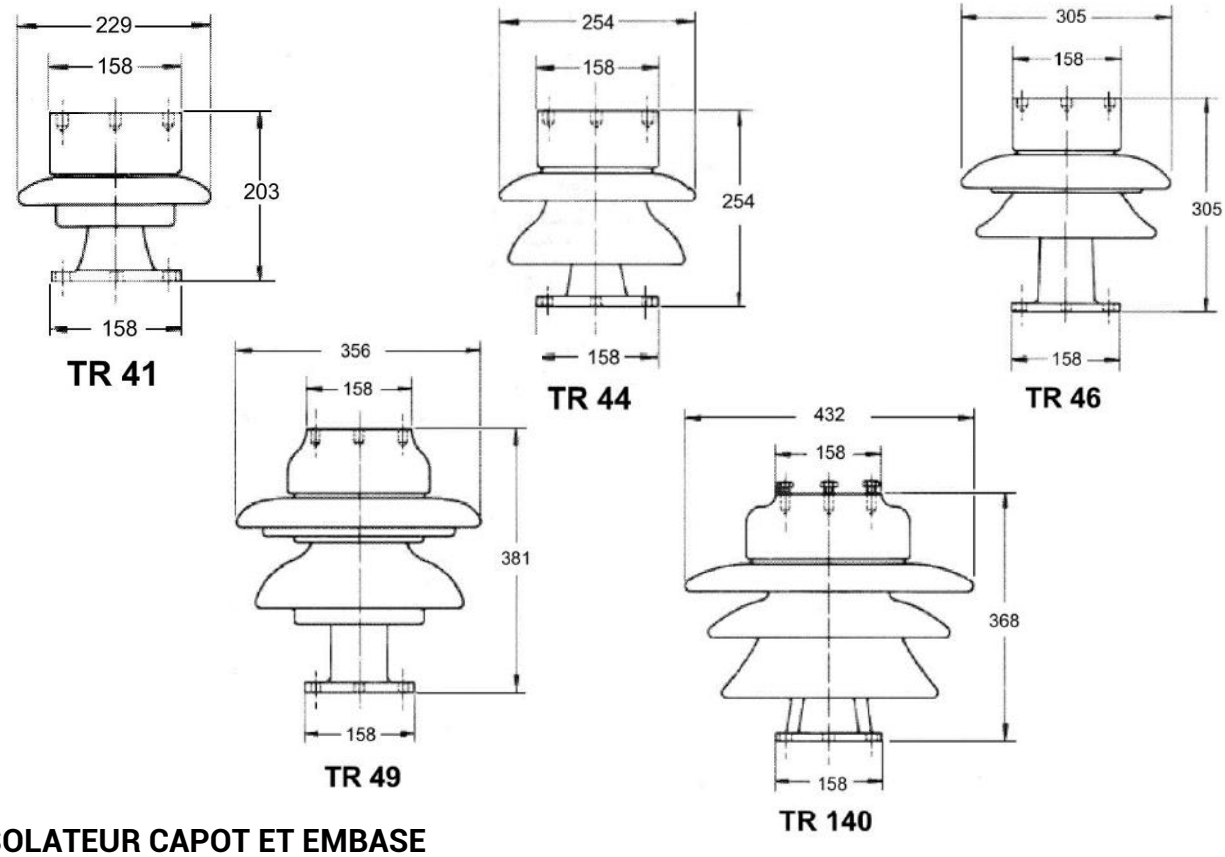

ISOLATEUR CAPOT ET EMBASE PORCELAINE

CLASSE ANSI	NUMÉRO	BIL (kV)	POIDS UNITAIRE (LBS)
TR 41	PE12082	95	19,84
TR 44	PE12152	110	32,00
TR 46	PE12252	150	35,27
TR 49	PE12352	200	72,75
TR 140	PE12692	210	83,78

CERCLE DE BOULONNAGE – 5''

	IEC/ABNT	ANSI*
Capot 4 trous filetés	M16 x 16 mm	5/8'' – 11UNC
Embase 4 trous	Diam. 18 mm	Diam. 11/16''

*Ajouter « A » au numéro de pièce pour des filets ANSI

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ISOLATEUR DE POSTE

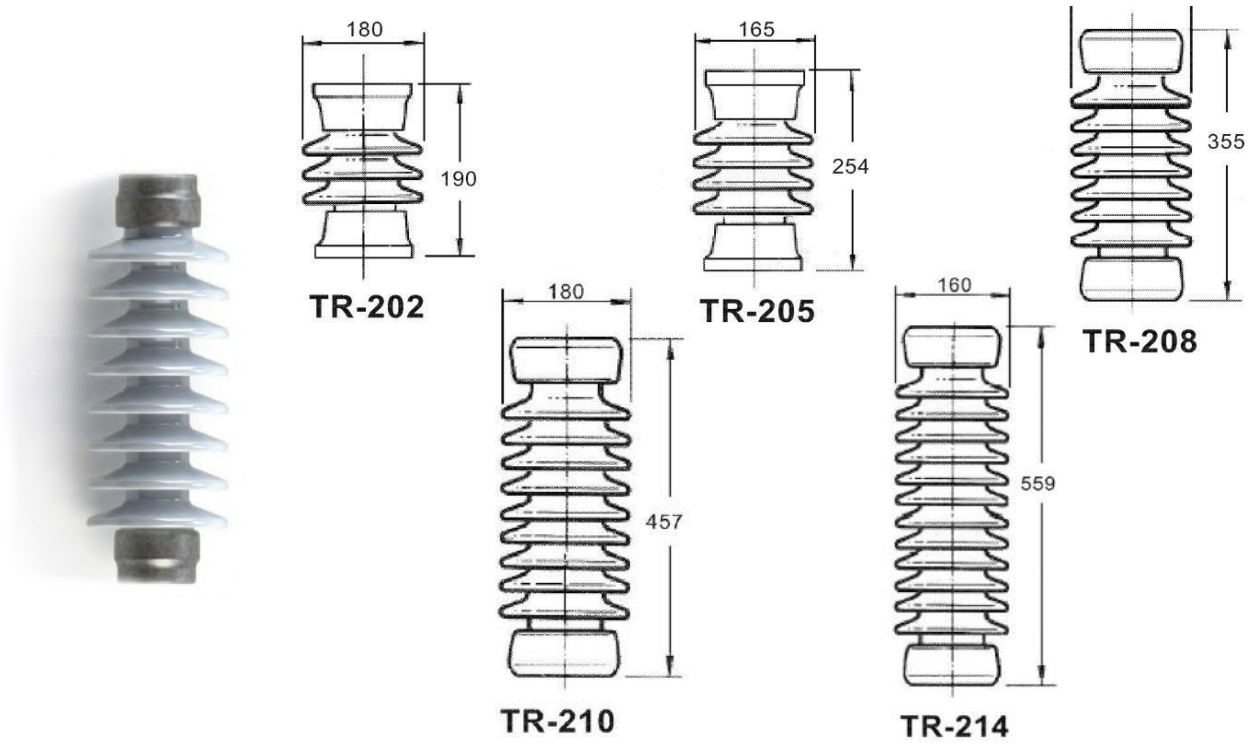

ISOLATEUR FÛT MASSIF – STANDARD PORCELAINE

CLASSE ANSI	NUMÉRO	BIL (kV)	POIDS UNITAIRE (LBS)
TR-202	PS-2609521	95	15,43
TR-205	PS-2611021	110	22,05
TR-208	PS-2615021	150	33,07
TR-210	PS-2620021	200	41,89
TR-214	PS-2625021	250	50,71
TR-216	PS-2635021	350	63,93

CERCLE DE BOULONNAGE – 3''

	IEC/ABNT	ANSI*
4 trous filetés	M12 x 16 mm	1/2'' – 13UNC

*Ajouter « A » au numéro de pièce pour des filets ANSI

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ISOLATEUR DE POSTE (suite)

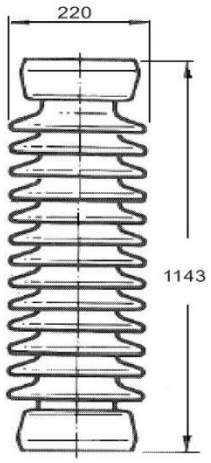

TR-286

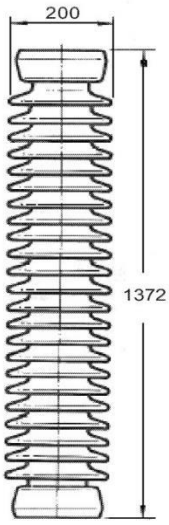

TR-288

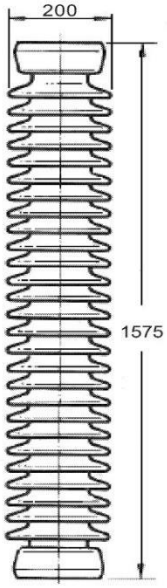

TR-291

ISOLATEUR FÛT MASSIF – STANDARD PORCELAINE

CLASSE ANSI	NUMÉRO	BIL (kV)	POIDS UNITAIRE (LBS)
TR-286	PS-2655021	550	141
TR-288	PS-2665021	650	152
TR-291	PS-2675021	750	179

CERCLE DE BOULONNAGE – 5''

	IEC/ABNT	ANSI*
4 trous filetés	M16 x 16 mm	5/8'' – 11UNC

*Ajouter « A » au numéro de pièce pour des filets ANSI

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ISOLATEUR DE POSTE (suite)

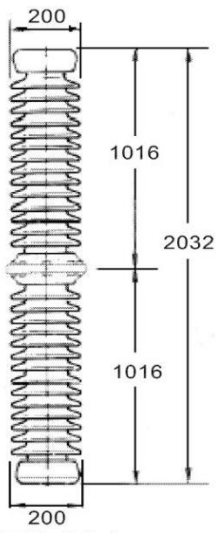

TR-304

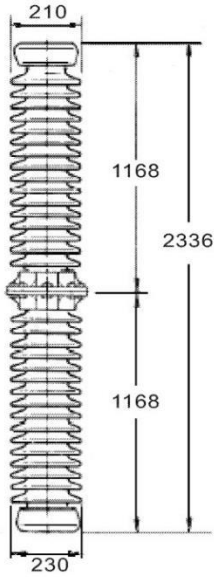

TR-312

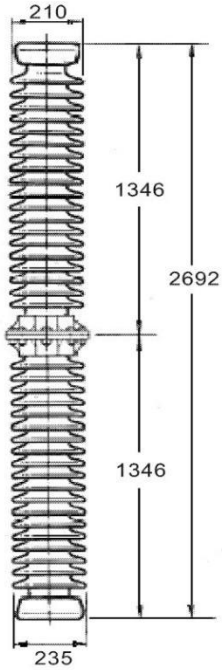

TR-324

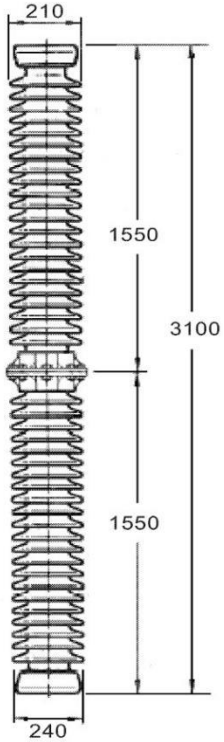

TR-330

ISOLATEUR FÛT MASSIF – STANDARD PORCELAINE

CLASSE ANSI	NUMÉRO	BIL (kV)	POIDS UNITAIRE (LBS)
TR-304	PS-2690012	900	227
TR-312	PS-2610522	1050	260
TR-324	PS-2613012	1300	300
TR-330	PS-2614712	1470	344

CERCLE DE BOULONNAGE – 5''

	IEC/ABNT	ANSI*
4 trous filetés	M16 x 16 mm	5/8'' – 11UNC

*Ajouter « A » au numéro de pièce pour des filets ANSI

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ISOLATEUR DE POSTE (suite)







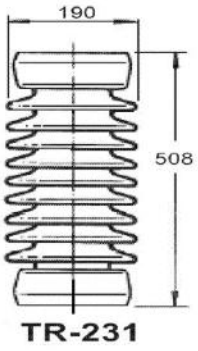

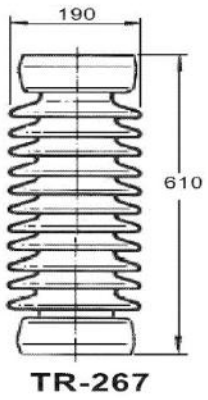

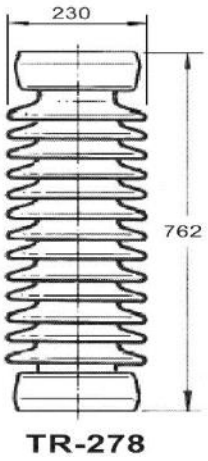

ISOLATEUR FÛT MASSIF – ROBUSTE PORCELAINE

CLASSE ANSI	NUMÉRO	BIL (kV)	POIDS UNITAIRE (LBS)
TR-222	PS-2609541	95	33
TR-225	PS-2611041	110	37,5
TR-227	PS-2615041	150	46,5
TR-231	PS-2620041	200	64
TR-267	PS-2625041	250	86
TR-278	PS-2635031	350	108

CERCLE DE BOULONNAGE – 5''

	IEC/ABNT	ANSI*
4 trous filetés	M16 x 16 mm	5/8'' – 11UNC

*Ajouter « A » au numéro de pièce pour des filets ANSI

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ISOLATEUR DE POSTE (suite)

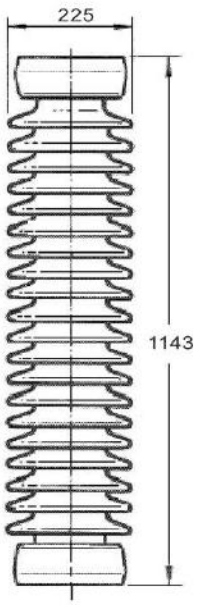

TR-287

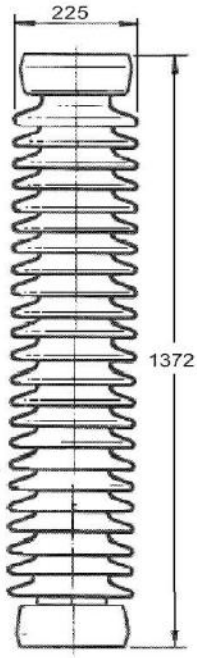

TR-289

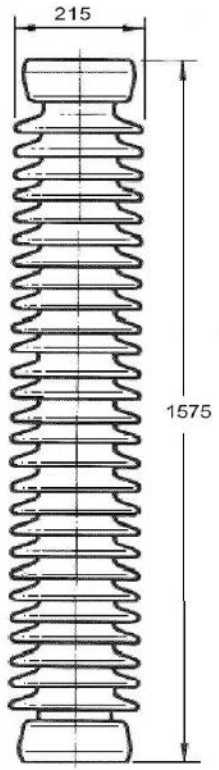

TR-295

ISOLATEUR FÛT MASSIF – ROBUSTE PORCELAINE

CLASSE ANSI	NUMÉRO	BIL (kV)	POIDS UNITAIRE (LBS)
TR-287	PS-2655021	550	176,5
TR-289	PS-2665021	650	192
TR-295	PS-2675021	750	179

CERCLE DE BOULONNAGE – 5''

	IEC/ABNT	ANSI*
4 trous filetés	M16 x 16 mm	1/2'' – 11UNC

*Ajouter « A » au numéro de pièce pour des filets ANSI

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ISOLATEURS TR

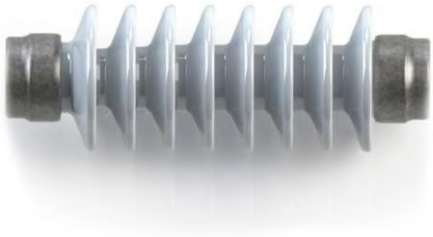

TABLEAU DES ISOLATEURS « TR »

TENSION NOMINALE (kV)	BIL (kV)	ISOLATEUR CAPOT/EMBASE CLASSE ANSI-C29.8 TR	ISOLATEUR FÛT MASSIF CLASSE ANSI-C29.9 TR
7,5	95	1	202
		41	222
15	110	4	205
		44	225
25	150	7	208
		46	227
35	200	10	210
		49	231
45	250	13	214
		53	267
69	350	16	216
		56	278
138	550	19	286
	650	22	288
	750	25	291
		123	295
230	950	126	304
		27	308
	1050	128	312
		28	316
		129	362
345	1300	131	324
		133	367
500	1470	136	330
		135	371
	1550	153	379
	1800	157	391

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ISOLATEUR EN POLYMÈRE

NUMÉRO	TENSION (kV)	CLASSE ANSI	TAILLE DU COU	TAILLE DE LA TIGE
HPI-55-3	15	55-3	C	1"
HPI-55-4	15	55-4	F	1"
HPI-55-5-01	25	55-5	F	1"
HPI-55-5-02	25		F	1-3/8"
HPI-25-01	25	55-5	F	1"
HPI-25-02	25		F	1-3/8"
HPI-25J-01	25	56-1	J	1"
HPI-25J-02	25		J	1-3/8"
HPI-35-01	35		F	1"
HPI-35J-01	35		J	1"
HPI-35J-02	35	55-7	J	1-3/8"

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ISOLATEUR EN POLYMÈRE VISE-TOP 15/25 kV

NUMÉRO	DESCRIPTION	TENSION (kV)	CLASSE ANSI	TAILLE DU COU	TAILLE DE LA TIGE
HPI-15VTP	Avec inserts en plastique pour utilisation sur des conducteurs en aluminium ou en cuivre recouverts ou nus.	15	55-3 & 55-4	C	1''
HPI-15VTM	Avec inserts métalliques pour utilisation sur des conducteurs en aluminium nus.	15	55-3 & 55-4	C	1''
HPI-15VTB	Avec inserts en bronze pour utilisation sur des conducteurs en cuivre.	15	55-3 & 55-4	C	1''
HPI-25VTP-01	Avec inserts en plastique pour utilisation sur des conducteurs en aluminium ou en cuivre recouverts ou nus.	25	55-5	F	1''
HPI-25VTP-02	Avec inserts en plastique pour utilisation sur des conducteurs en aluminium ou en cuivre recouverts ou nus.	25	56-1	F	1-3 / 8''
HPI-25VTM-01	Avec inserts métalliques pour utilisation sur des conducteurs en aluminium nus.	25	55-5	F	1''
HPI-25VTM-02	Avec inserts métalliques pour utilisation sur des conducteurs en aluminium nus.	25	55-6	F	1-3 / 8''
HPI-25VTB-01	Avec inserts en bronze pour utilisation sur des conducteurs en cuivre.	25	55-5	F	1''
HPI-25VTB-02	Avec inserts en bronze pour utilisation sur des conducteurs en cuivre.	25	55-6	F	1''

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ISOLATEUR EN POLYMÈRE VISE-TOP 35 kV

NUMÉRO	DESCRIPTION	TENSION (kV)	CLASSE ANSI	Taille du cou	Taille de la tige
HPI-35VTP-01	Avec inserts en plastique pour utilisation sur des conducteurs en aluminium ou en cuivre recouverts ou nus.	35	55-6	F	1''
HPI-35VTP-02	Avec inserts en plastique pour utilisation sur des conducteurs en aluminium ou en cuivre recouverts ou nus avec inserts.	35	55-7	F	1-3 / 8''
HPI-35VTM-01	Métalliques pour utilisation sur des conducteurs en aluminium nus avec inserts.	35	55-6	F	1''
HPI-35VTM-02	Métalliques pour utilisation sur des conducteurs en aluminium nus.	35	55-7	F	1-3 / 8''
HPI-35VTB-01	Avec inserts en bronze pour utilisation sur des conducteurs en cuivre nus.	35	55-6	F	1''
HPI-35VTB-02	Avec inserts en bronze pour utilisation sur des conducteurs en cuivre nus.	35	55-7	F	1-3 / 8''

NUMÉRO	DESCRIPTION
VTST-1	Outil de cordage destiné à être utilisé avec les isolateurs Top Vise
B-1	Boulons de rechange pour les isolateurs haut de gamme

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ISOLATEUR FIN DE COURSE EN POLYMÈRE

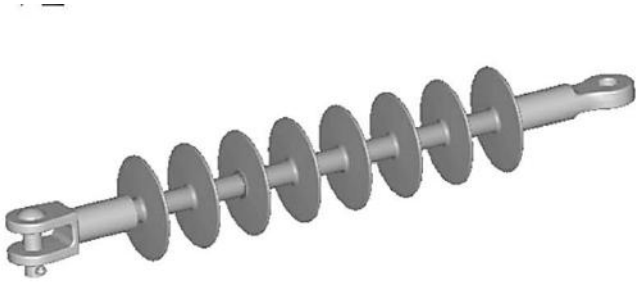

DS-M Series Distribution Deadend Insulators

- Conventional design deadend insulator
- Silicone shed housing is injection molded onto and bonded to the CR rod core
- Ductile iron end fitting are crimped to the fiberglass core in a tightly controlled process that ensures predictable tensile strength
- Unique multi-level sealing process
- Multiple fitting options available

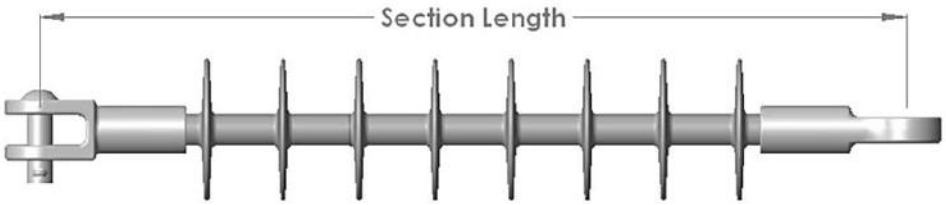

Line Voltage	Catalog No.	Section Length	Dry Arc	Leakage	Electrical Flashover (kV)				Weight	Quantity	
					60 Hz		CIFO				
kV		in [mm]	in [mm]	in [mm]	Dry	Wet	Pos	Neg	lbs [kgs]	CTN	Pallet
15	DS-15M	13.0 [330]	7.6 [193]	15.8 [401]	90	65	140	145	2.6 [1.2]	18	432
28	DS-28M	17.0 [432]	11.6 [295]	24.7 [627]	130	100	190	220	2.9 [1.3]	18	324
28	DS-25M	18.75 [476]	13.6 [345]	31.5 [800]	150	135	255	265	3.2 [1.4]	18	324
35	DS-35M	22.0 [559]	16.8 [426]	37.6 [954]	170	155	280	290	3.4 [1.5]	18	216

Notes:

1) SML = 15,737 lbs [70 kN]
2) RTL = 7,869 lbs [35 kN]
3) Maximum Torsional Load = 37 ft/lbs [50 Nm]
4) All ratings meet or exceed the requirements of ANSI C29.13 (2000) and LWIWG-01 (96)
5) Corrosion Resistant Fiberglass Core / Silicone Housing / ANSI 52-4 Clevis & Tongue End Fittings
6) HP Suffix Denotes Hex Pin
7) RUS Accepted
8) To order special fitting combinations, add 2 character suffix (i.e. DS-XXM-SB (socket / ball) - TT (tongue / tongue)

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ISOLATEUR EN POLYMÈRE OU SILICONE

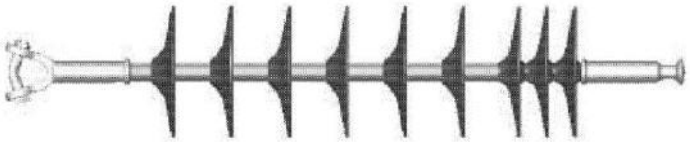

Contactez-nous pour obtenir plus de détails sur les différents modèles et tensions disponibles.

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ISOLATEUR DE POSTE EN POLYMÈRE

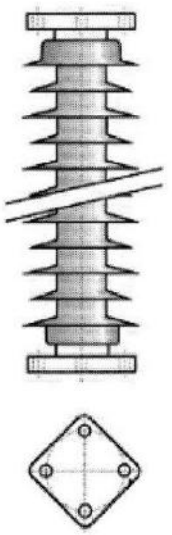

NPP20

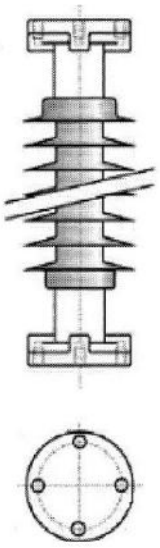

NAA100

ISOLATEUR DE SOUS-STATION – STANDARD. C.B. 3''
COMPOSITE SILICONE

NUMÉRO	VOLTAGE NOMINAL (kV)	ÉQUIVALENT TR	BIL (kV)	HAUTEUR (PO)	LIGNE DE FUITE (PO)	CAPACITÉ LATÉRALE (LBS)	POIDS (LBS)
NPP20XG05S	7,5	202	95	7,5	12,7	2000	6
NPP20XG07S	15	205	110	10,0	20,5	2000	7
NPP20XG11S	23	208	150	14,0	32,2	2000	9
NPP20XG15S	34,5	210	200	18,0	43,9	2000	10
NPP20XG19S	46	214	250	22,0	55,6	2000	12
NPP20XG27S	69	216	350	30,0	77,0	1500	17

ISOLATEUR DE SOUS-STATION – ROBUSTE C.B. 5''
COMPOSITE SILICONE

NUMÉRO	VOLTAGE NOMINAL (kV)	ÉQUIVALENT TR	BIL (kV)	HAUTEUR (PO)	LIGNE DE FUITE (PO)	CAPACITÉ LATÉRALE (LBS)	POIDS (LBS)
NAA100XH06S0	23	227	150	15	27,0	8000	26
NAA100XH09S0	34,5	231	200	20	40,8	6500	30
NAA100XH12S0	46	267	250	24	53,6	5500	34
NAA100XH16S0	69	278	350	30	72,0	4400	38

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ISOLATEUR DE POSTE EN POLYMÈRE (suite)

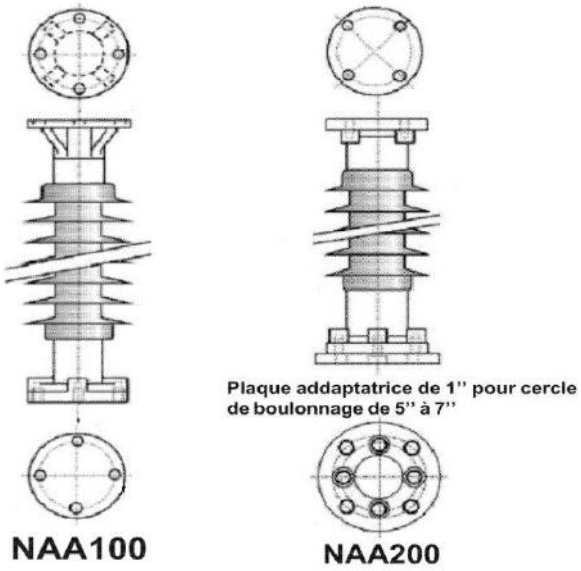

ISOLATEUR DE SOUS-STATION – STANDARD C.B. 5''
COMPOSITE SILICONE

NUMÉRO	VOLTAGE NOMINAL (kV)	ÉQUIVALENT TR	BIL (kV)	HAUTEUR (PO)	LIGNE DE FUITE (PO)	CAPACITÉ LATÉRALE (LBS)	POIDS (LBS)
NAA100XH16S0	69	278	350	30	72,0	4400	38
NAA100XH23S0	115	286/287	550	45	106,1	2800	46
NAA100XH29S0	138	288/289	650	54	133,7	2300	49
NAA100XH34S0	161	291/295	750	62	156,7	2000	60
NAA100XH46S1	230	304/308	900	80	211,8	1600	52
NAA100XH54S1	315	312/316	1050	92	248,6	1400	57

ISOLATEUR DE SOUS-STATION – ROBUSTE C.B. 5''
COMPOSITE SILICONE

NUMÉRO	VOLTAGE NOMINAL (kV)	ÉQUIVALENT TR	BIL (kV)	HAUTEUR (PO)	LIGNE DE FUITE (PO)	CAPACITÉ LATÉRALE (LBS)	POIDS (LBS)
NAA200XV15S0	69	278	350	30	62	10 000	53
NAA200XV24S0	115	286/287	550	45	99	7100	69
NAA200XV28S0	138	288/289	650	54	117,5	6000	77
NAA200XV33S0	161	291/295	750	62	138,3	5160	86
NAA200XV45S1	230	304/308	900	80	188,4	4000	110
NAA200XV53S1	315	312/316/362	1050	92	221,8	3475	122
NAA200XV62S1	345	324/367/369	1300	106	259,3	3000	137
NAA200XV73S1	500	330/371/373	1470	122	305,2	2600	154

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ISOLATEUR DE SUSPENSION POUR X-FO (ANTISISMIQUE)

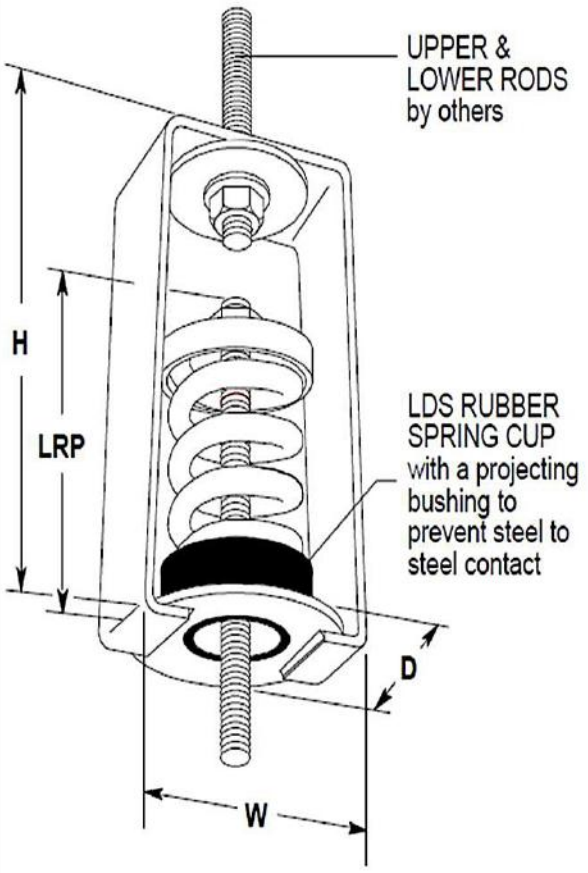

LDS stands for **L**ow **D**ynamic **S**tiffness Bridge Bearing Natural Rubber to minimize noise and vibration transmission.

TYPE HS RATINGS

Size	Rated Capacity (lbs)	(kg)	Rated Defl. (in)	(mm)	Spring Constant (lbs/in)	(kg/mm)	Spring Color
HS-X-12	12	5	1.25	32	10	0.18	Orange
HS-X-23	23	10	1.30	33	18	0.3	Brown
HS-X-33	33	15	1.10	28	30	0.5	Red
HS-X-54	54	25	1.20	31	45	0.8	White
HS-X-76	76	35	1.02	26	73	1.3	Black
HS-X-113	113	51	1.00	25	113	2.0	Yellow
HS-X-130	130	59	1.00	25	130	2.3	Purple
HS-X-175	175	79	1.00	25	175	3.1	Silver
HS-X-210	210	95	1.00	25	210	3.8	Blue
HS-A-12	12	5	1.00	25	12	0.2	Red
HS-A-18	18	8	1.00	25	18	0.3	Gray
HS-A-25	25	11	1.00	25	25	0.4	Orange
HS-A-41	41	19	1.18	30	35	0.6	Pink
HS-A-56	56	25	1.14	29	49	0.9	Black
HS-A-73	73	33	1.06	27	69	1.2	Tan
HS-A-95	95	43	1.01	26	94	1.7	Green
HS-A-45	45	20	1.60	41	28	0.5	Blue
HS-A-75	75	34	1.50	38	50	0.9	Orange
HS-A-125	125	57	1.33	34	94	1.7	Brown
HS-A-200	200	91	1.15	29	174	3.1	Black
HS-A-310	310	141	1.00	25	310	5.5	Yellow
HS-A-400	400	182	1.00	25	400	7.2	Green
HS-A-510	510	232	1.00	25	510	9.1	Red
HS-A-625	625	284	1.00	25	625	11.2	White

All springs have additional travel to solid equal to 50% of Rated Deflection.

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

TIGE

TIGE DE MISE À LA TERRE CUIVRÉE

NUMÉRO	DIMENSIONS (DIAMÈTRE x LONGUEUR)
J8338	5/8'' x 8'
J8340	5/8'' x 10'
J8348	3/4'' x 8'
J8350	3/4'' x 10'
J8370	1'' x 10'

TIGE DE MISE À LA TERRE EN SECTION CUIVRÉE, FILETÉ AUX 2 EXTRÉMITÉS

NUMÉRO	DIMENSIONS (DIAMÈTRE x LONGUEUR)
J9155	5/8'' x 5'
J9158	5/8'' x 8'
J9160	5/8'' x 10'
J9170	3/4'' x 10'
J9190	1'' x 10'

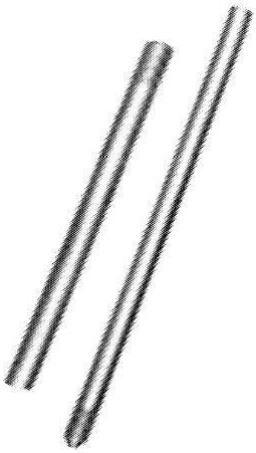

TIGE DE MISE À LA TERRE GALVANISÉE À CHAUD

NUMÉRO	DIMENSIONS (DIAMÈTRE x LONGUEUR)
J5328	5/8'' x 8'
J5338	3/4'' x 8'
J5340	3/4'' x 10'

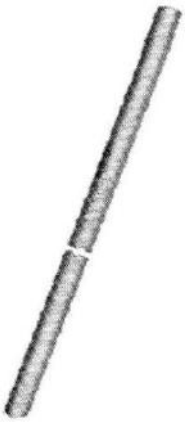

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

RACCORD

RACCORD POUR TIGE DE M.A.L.T. BRONZE

NUMÉRO	POUR TIGE (PO)	GROSSEUR DE CONDUCTEUR
J8490	3/8	6 – 14 AWG
J8491	1/2	2 – 10 AWG
J8492	5/8	1/0 – 8 AWG
J8493	3/4	1/0 – 8 AWG



RACCORD EN U POUR TIGE DE M.A.L.T. GALVANISÉ À CHAUD

NUMÉRO	POUR TIGE (PO)
J8225	5/8 à 3/4



RACCORD POUR TIGE DE M.A.L.T. GALVANISÉ À CHAUD

NUMÉRO	POUR TIGE (PO)	GROSSEUR DE CONDUCTEUR
J8490	5/8	10 – 2 AWG
J8491	3/4	10 – 1/0 AWG



BOÎTE D'ÉLECTRODE GALVANISÉE À CHAUD

NUMÉRO	DIAMÈTRE (PO)	PROFONDEUR (PO)
DN6	10	12



(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

RACCORD (suite)

RACCORD POUR TIGE DE M.A.L.T.
GALVANISÉ À CHAUD

NUMÉRO	POUR TIGE (PO)	GROSSEUR DE CONDUCTEUR
K56-1	1/2, 5/8, 3/4''	Max. 1/2''

COUPLEUR DE TIGE
BRONZE

NUMÉRO	DIAMÈTRE DE LA TIGE (PO)
J9180	1/2
J9182	5/8
J9183	3/4
J9184	1

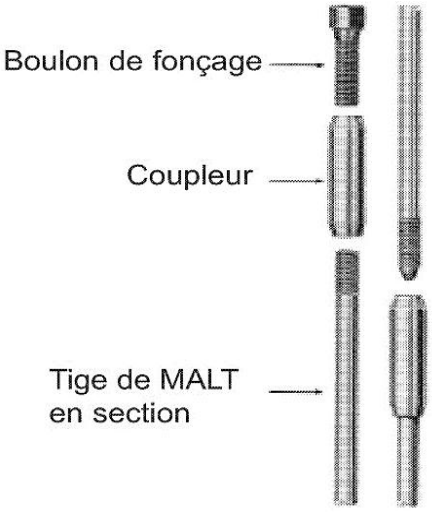

BOULON DE FONÇAGE
ACIER

NUMÉRO	DIAMÈTRE DE LA TIGE (PO)
J9186	5/8
J9187	3/4

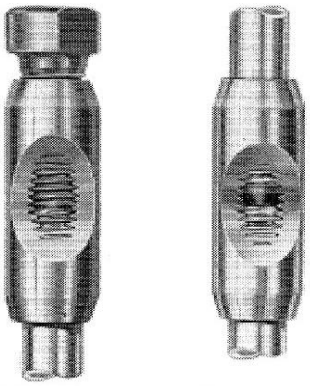

Vue en coupe d'un coupleur montrant le boulon de fonçage et l'extrémité d'une tige de MALT en section

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

BOÎTE D'ÉLECTRODE

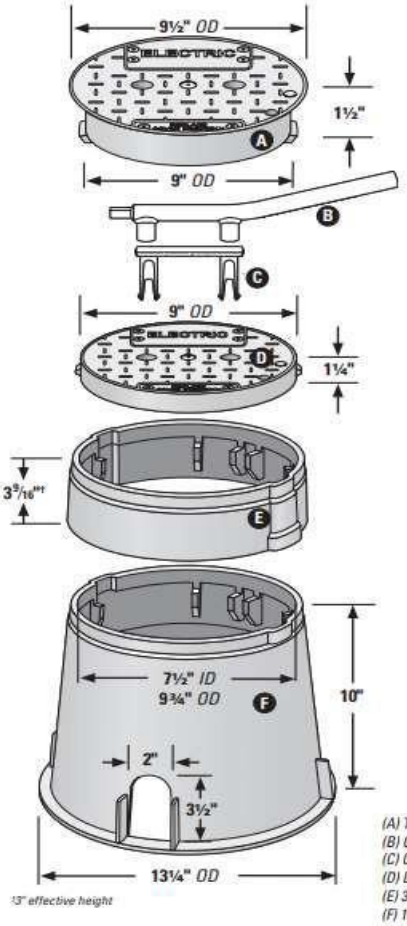

- SUPERFLEXON material
  - Stronger than structural foam, greater top-load strength
  - More UV and wear resistant than structural foam
  - 10 Year Lid Guarantee
- Lighter than cast iron or concrete boxes
  - Easier warehouse handling
  - Reduced injury potential
- Drop-in lid with 1/4 turn lock
  - Optional locking screw discourages vandalism
  - Keeps lid in place in high water
- Lids are easily interchangeable
- Lids available in black, gray and green
- Boxes available in black and green

10" ROUND ELECTRIC BOXES

DESCRIPTION	PART #
10" ROUND ASSEMBLIES	
Electric (w/2 Mouse Holes)	
Black Box, Black Lid	181112
Green Box, Green Lid w/Locking Screw	181124
Black Box, Black T-Top Lid	184502
Black Box, Gray T-Top Lid w/Locking Screw	184518
Green Box, Green T-Top Lid w/Locking Screw	184519
Black Box, Black T-Top Lid w/Locking Screw	184520
BOXES ONLY	
Black w/2 Mouse Holes	181014
Green w/2 Mouse Holes	181033

DESCRIPTION	PART #
LIDS ONLY	
Electric	
Black "Electric"	181021
Green "Electric"	181037
Black "Electric" T-Top	184007
Black T-Top "Electric" w/Reflector	184016
Gray "Electric" T-Top	184010
EXTENSIONS	
3"H Black	181026
ACCESSORIES	
Cover Lifting Tool	144046
Cover Handle	144495

MODÈLE 10' NOIR NUMÉRO 181112

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

MOULURE POUR FILS DE M.A.L.T.

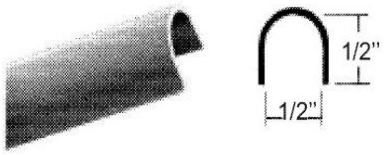

PM128

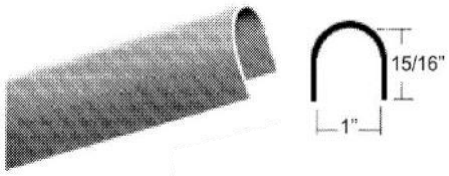

PM18

PM7510P

MOULURE POUR CONDUCTEUR DE M.A.L.T.

NUMÉRO	DIMENSIONS
PLASTIQUE GRIS	
PM128	1/2'' x 8'
PM18	1'' x 8'
PLASTIQUE NOIR	
PM7510P	3/4'' x 10'

CRAMPON DE FIXATION

CRAMPON DE FIXATION GALVANISÉ À CHAUD

NUMÉRO	DIMENSIONS (PO) LONGUEUR x LARGEUR INT.
J127	2 x 1-1/16
J128	3 x 1-1/16
J142	3 x 1-1/2
J156	2 x 1/2
J172	1-1/2 x 3/8
J173	1-3/4 x 3/8
J7487HDG	2 x 5/8
J7493HDG	3 x 1-1/16

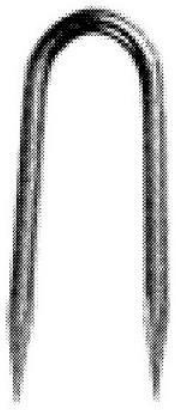

Aussi disponible plaqué cuivre ou électro-galvanisé

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

CRAMPON ANTI-RECUL

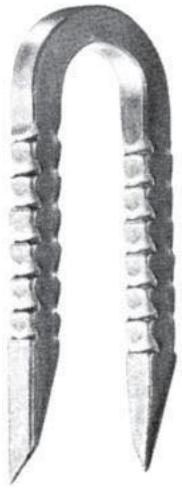

NUMÉRO	MATÉRIAU	DIMENSIONS (PO) (LONGUEUR x LARGEUR INT. x DIA. BROCHE)	POIDS/100 (LBS)
J7656	Galvanisé	1-1/2 x 3/8 x .131	1.4
J7657	Galvanisé	2 x 3/8 x .131	1.9
J7658	Galvanisé	2 x 3/8 x .65	2.2
J7659	Galvanisé	1-1/2 x 3/8 x .65	3.1
J7664	Galvanisé	3 x 1-1/16 x .218	8.3
J7672	Galvanisé	2 x 5/8 x .165	3.2
J7682	Cuivré	1-1/2 x 3/8 x .140	1.7
J7663	Galvanisé	2-1/4 x 1-3/16 x .218	7.0

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

TAPIS DE M.A.L.T.

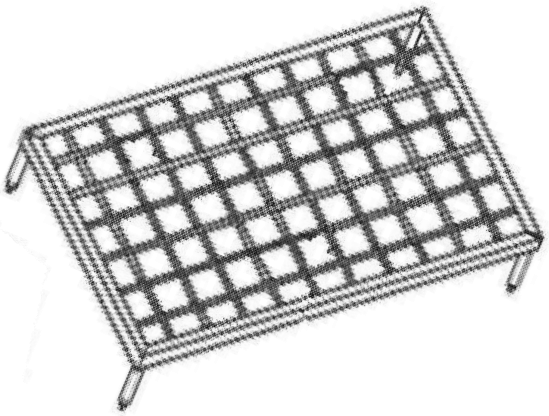

TAPIS DE MISE À LA TERRE GALVANISÉ

NUMÉRO	DIMENSIONS (PIEDS)	DESCRIPTION
TMT6X4AC	4 x 6	Avec 3 connecteurs

TIGE TEMPORAIRE

TIGE DE M.A.L.T. TEMPORAIRE

NUMÉRO	CONDUCTEUR MAXIMUM	DIMENSIONS
4370	2/0AWG ou pince sur tige	5/8 x 72''

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

POINT FIXE

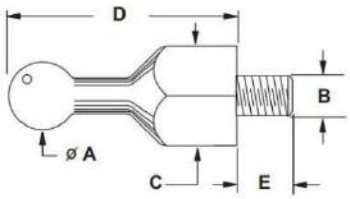

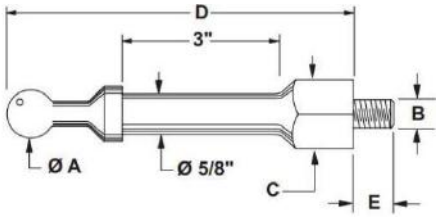

CATALOG NUMBER	DIMENSIONS					WEIGHT
	A	B	C	D	E	
03-M-006	20 mm	1/2 - 13	7/8	2 15/16	No screw	0.2
03-M-006-0.5	20 mm	1/2 - 13	7/8	2 15/16	1/2	0.3
03-M-006-1*	20 mm	1/2 - 13	7/8	2 15/16	1	0.4
03-M-026	20 mm	1/2 - 13	7/8	4	No screw	0.6
03-M-026-0.5	20 mm	1/2 - 13	7/8	4	1/2	0.7
03-M-026-1*	20 mm	1/2 - 13	7/8	4	1	0.7
HC-30015	20 mm	1/2 - 13	7/8	6	No screw	0.8
HC-30015-0.5	20 mm	1/2 - 13	7/8	6	1/2	0.9
HC-30015-1*	20 mm	1/2 - 13	7/8	6	1	0.9
03-M-027	20 mm	5/8 - 11	1	4	No screw	0.8
03-M-027-0.5	20 mm	5/8 - 11	1	4	1/2	0.9
03-M-027-1*	20 mm	5/8 - 11	1	4	1	0.9
HC-30028	20 mm	5/8 - 11	1	2 5/8	No screw	0.7
HC-30028-0.5	20 mm	5/8 - 11	1	2 5/8	1/2	0.8
HC-30028-1*	20 mm	5/8 - 11	1	2 5/8	1	0.8
HC-30029	25 mm	1/2 - 13	1	3	No screw	0.5
HC-30029-0.5	25 mm	1/2 - 13	1	3	1/2	0.6
HC-30029-1*	25 mm	1/2 - 13	1	3	1	0.6
HC-30036	25 mm	1/2 - 13	1	6 1/4	No screw	1.1
HC-30036-0.5	25 mm	1/2 - 13	1	6 1/4	1/2	1.2
HC-30036-1*	25 mm	1/2 - 13	1	6 1/4	1	1.2
HC-30037	25 mm	5/8 - 11	1	3	No screw	0.4
HC-30033	25 mm	5/8 - 11	1	3	1/2	0.5
HC-30037-1*	25 mm	5/8 - 11	1	3	1	0.5
HC-30012	30 mm	5/8 - 11	1 1/2	4 3/8	No screw	1.8
HC-30012-0.5	30 mm	5/8 - 11	1 1/2	4 3/8	1/2	1.9
HC-30012-1*	30 mm	5/8 - 11	1 1/2	4 3/8	1	1.9

Notes :

1) * - hardware included
2) HC-30033 used as grounding ball stud on 01-M-037
3) Other length for "E" available upon request (e.g. HC-30029-3.5 for 3.5'' length)
4) 20 mm and 25 mm grounding ball studs are rated for 35kA per IEC 61230 and 43kA per ASTM R855
5) 30 mm grounding ball studs are rated for 60kA per IEC 61230 and 74kA per ASTM R855

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ENSEMBLE SIMPLE PHASE

BD - B2 - 2/0 - Y - 10

Cable End 1

- **B** = Universal Grounding Clamp 01-M-037
- **B2** = Two grounding ball studs 25 mm installed on clamp
- **BD** = One grounding ball stud 25 mm installed on right hand side of clamp (jaw facing user)
- **BG** = One grounding ball stud 25 mm installed on left hand side of clamp (jaw facing user)
- **H** = Universal Grounding Clamp 01-M-034
- **H2** = Two grounding ball studs 20 mm installed on clamp
- **HD** = One grounding ball stud 20 mm installed on right hand side of clamp (jaw facing user)
- **HG** = One grounding ball stud 20 mm installed on left hand side of clamp (jaw facing user)
- **D** = Duck Bill Clamp HCDB-117
- **DS** = Duck Bill Clamp with Serrated Jaws HCDB-117S
- **P** = With Parking Stud Installed
- **P** = 20 mm Ball Stud Grounding Clamp HC-10015
- **Q** = 25 mm Ball Stud Grounding Clamp HC10015-A
- **C** = C Clamp 01-M-044
- **C1** = C Clamp 01-M-044A for 30 MM Ball stud
- **UA** = Universal Grounding Clamp HC-10041-A
- **S** = C Clamp HC-10042
- **M** = Cable with ferrule
- **U** = Universal Grounding Clamp HC-10041
- **Z 15** = 15kV Elbow
- **Z 25** = 25kV Elbow

Cable End 2

- **B** = Universal Grounding Clamp 01-M-037
- **B2** = Two grounding ball studs 25 mm installed on clamp
- **BD** = One grounding ball stud 25 mm installed on right hand side of clamp (jaw facing user)
- **BG** = One grounding ball stud 25 mm installed on left hand side of clamp (jaw facing user)
- **H** = Universal Grounding Clamp 01-M-034
- **H2** = Two grounding ball studs 20 mm installed on clamp
- **HD** = One grounding ball stud 20 mm installed on right hand side of clamp (jaw facing user)
- **HG** = One grounding ball stud 20 mm installed on left hand side of clamp (jaw facing user)
- **D** = Duck Bill Clamp HCDB-117
- **DS** = Duck Bill Clamp with Serrated Jaws HCDB-117S
- **P** = With Parking Stud Installed
- **P** = 20 mm Ball Stud Grounding Clamp HC-10015
- **Q** = 25 mm Ball Stud Grounding Clamp HC10015-A
- **C** = C Clamp 01-M-044
- **C1** = C Clamp 01-M-044A for 30 MM Ball stud
- **UA** = Universal Grounding Clamp HC-10041-A
- **S** = C Clamp HC-10042
- **M** = Cable with ferrule
- **E** = Exception
- **T** = T-Handle HC-10026

Cable Length

Cable length in feet

Jacket Type

- **B** = (Class K) - Carolprene black opaque jacket
- **C** = (Class M) – Carol orange opaque jacket
- **E** = (Class K) - red opaque jacket
- **S** = (Class K) Silicone transparent jacket
- **Y** = (Class K) - yellow opaque jacket

Cable size

2	= 2 AWG	(1H)
1/0	= 1/0 AWG	(2H)
2/0	= 2/0 AWG	(3H)
4/0	= 4/0 AWG	(5H)
350	= 350 MCM	(7H)
500	= 500 MCM	

Cable End 1 Cable End 2

Single Phase Assembly

Carrying Bag 01-C-025-25

Cascade Assembly

Cluster Assembly

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ENSEMBLE TRIPHASÉ

BD - B2 - 2/0 - Y - 10 - Y - 10

Cable End 1

B	=	Universal Grounding Clamp 01-M-037
B2	=	Two grounding ball studs 25 mm installed on clamp
BD	=	One grounding ball stud 25 mm installed on right hand side of clamp (jaw facing user)
BG	=	One grounding ball stud 25 mm installed on left hand side of clamp (jaw facing user)
H	=	Universal Grounding Clamp 01-M-034
H2	=	Two grounding ball studs 20 mm installed on clamp
HD	=	One grounding ball stud 20 mm installed on right hand side of clamp (jaw facing user)
HG	=	One grounding ball stud 20 mm installed on left hand side of clamp (jaw facing user)
D	=	Duck Bill Clamp HCDB-117
DS	=	Duck Bill Clamp with Serrated Jaws HCDB-117S
P	=	With Parking Stud InstalledS
P	=	20 mm Ball Stud Grounding Clamp HC-10015
Q	=	25 mm Ball Stud Grounding Clamp HC10015-A
C	=	C Clamp 01-M-044
U	=	Universal Grounding Clamp HC-10041
S	=	Universal Grounding Clamp HC-10042
M	=	Cable with ferrule
Z 15	=	15kV Elbow
Z 25	=	25kV Elbow
Z 35	=	35kV Elbow

Cable End 2

B	=	Universal Grounding Clamp 01-M-037
B2	=	Two grounding ball studs 25 mm installed on clamp
BD	=	One grounding ball stud 25 mm installed on right hand side of clamp (jaw facing user)
BG	=	One grounding ball stud 25 mm installed on left hand side of clamp (jaw facing user)
H	=	Universal Grounding Clamp 01-M-034
H2	=	Two grounding ball studs 20 mm installed on clamp
HD	=	One grounding ball stud 20 mm installed on right hand side of clamp (jaw facing user)
HG	=	One grounding ball stud 20 mm installed on left hand side of clamp (jaw facing user)
D	=	Duck Bill Clamp HCDB-117
DS	=	Duck Bill Clamp with Serrated Jaws HCDB-117S
P	=	With Parking Stud Installed
P	=	20 mm Ball Stud Grounding Clamp HC-10015
Q	=	25 mm Ball Stud Grounding Clamp HC10015-A
C	=	C Clamp 01-M-044
U	=	Universal Grounding Clamp HC-10041
S	=	Universal Grounding Clamp HC-10042
M	=	Cable with ferrule
Z 15	=	15kV Elbow
Z 25	=	25kV Elbow
Z 35	=	35kV Elbow
T	=	T-Handle HC-10026

Cable Size

2	=	2 AWG (1H)
1/0	=	1/0 AWG (2H)
2/0	=	2/0 AWG (3H)
4/0	=	4/0 AWG (5H)

Cable Length (L2)

Cable length in feet

Letter "Y"

Y	=	Three Phase Assembly

Jacket Type

B	=	Carolprene - black opaque jacket
C	=	Carol (Class M) - orange opaque jacket
E	=	Excelene (Class K) - red jacket
S	=	Silicone - transparent jacket
Y	=	Grounding Cable - yellow opaque jacket

Cable Length (L1)

Cable length in feet

Cable End 1 Cable End 2

Single Phase Assembly

Carrying Bag 01-C-025-25

Cascade Assembly

Three Phase Assembly

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

MANCHON ET GOUGEON

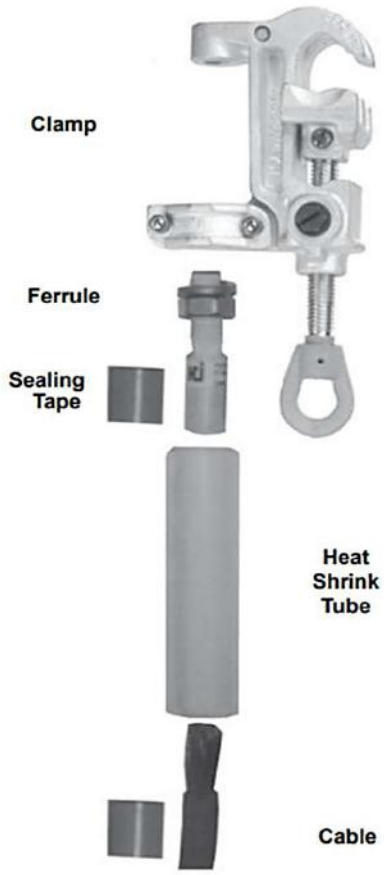

Grounding Assemblies

Features

- All grounding components can be sold separately
- For other components, see following pages

Sealing Tape

Catalog Number	Required Per End	Length (In)
HC-10068-C	1	6

Note: Can order complete 25ft roll HC-10068

Clear Polymer Heat Shrink Tube

Catalog Number	Required Per End	Length (In)	I.D. (In)	For Cable Size
HC-10067-1.1	1	5.0	1.1	#2 - 2/0
HC-10067-1.1-7	1	7.0	1.1	#2 - 2/0
HC-10067-1.5	1	6.0	1.5	4/0
HC-10067-1.5-7	1	7.3	1.5	4/0
HC-10067-2.0	1	9.6	1.5	350 - 500 MCM

Cable Termination Kits (per each extremity)

Each kit includes (1) ferrule, heat shrink tube, and sealing tape

Catalog Number	For Cable Size
KIT 01-M-038-35-2	#2 (1H)
KIT 01-M-038-50-1/0	1/0 (2H)
KIT 01-M-038-2/0	2/0 (3H)
KIT 01-M-038-4/0	4/0 (5H)
KIT 01-M-038-350-3/4	350 MCM (7H)
KIT 01-M-038-500	500 MCM

Caliber #2, 1/0, 2/0 and 4/0

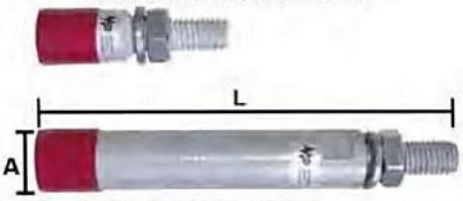

Caliber 350 and 500

Ferrules

Features

- All ferrules are filled with inhibitive grease to prevent humidity infiltration
- Compression ferrules for 5/8 - 11 UNC threaded type terminal
- Stainless steel hardware (nut and lock washer) and grease cap included
- **Tested and certified only with MPS components**

Materials

99.9% electrolytic tin-plated copper

Catalog Number	Cable Caliber	Compression Die		Dimensions		Capacity 15 Cycles	Capacity 30 Cycles	Weight
		Husky	Burndy	A	L			
01-M-038-35-2 (1H)	2 AWG	HT41CE	U-164*	0.625	3	15kA (ASTM) Peak 41kA	11.5kA (ASTM)	0.26
01-M-038-35-50-1/0 (2H)	1/0 AWG	HT41CF	U-166	0.690	3	25kA (ASTM) Peak 65kA	18.4kA (ASTM)	0.23
01-M-038-2/0 (3H)	2/0 AWG	HT41CF	U-166	0.750	3	22kA (IEC) 27kA (ASTM)	20kA (ASTM)	0.29
01-M-038-4/0 (5H)	4/0 AWG	HT41CJ	U-168	0.940	3	35kA (IEC) 47kA (ASTM)	30kA (ASTM)	0.37
01-M-038-350 (7H)	350 MCM	HT41BL	U34-RT	1.062	7	40kA (IEC) 75kA (ASTM)	53kA (ASTM)	1.05
01-M-038-500	500 MCM	HT41BP	U39-RT	1.300	7	55kA (IEC) 86.3kA (ASTM)	61kA (ASTM)	1.46

Notes:

* - For 2 AWG transparent silicone jacket cable and 2 AWG yellow jacket cable, use Die U-165

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

CÂBLE DE M.A.L.T.

Opaque Class "K" Yellow EPDM Jacket Cable

Catalog Number	Color	Caliber AWG	Conductor Diameter	Number of Strands	Cable Diameter	Capacity 15 Cycles	Capacity 30 Cycles	Temperature (°F)	Separator	Weight (lbs/500'reel)
MPSKY#2	Yellow	2	.32	661/30	.49	12kA (IEC) 15kA (ASTM)	11.5kA (ASTM)	-58 to 221	Paper	294
MPSKY1/0	Yellow	1/0	.42	1050/30	.59	20kA (IEC) 25kA (ASTM)	18.4kA (ASTM)	-58 to 221	Paper	455
MPSKY2/0	Yellow	2/0	.47	1323/30	.63	22kA (IEC) 31kA (ASTM)	23.6kA (ASTM)	-58 to 221	Paper	539
MPSKY4/0	Yellow	4/0	.59	2107/30	.80	35kA (IEC) 47kA (ASTM)	29.4kA (ASTM)	-58 to 221	Paper	857

Transparent Silicone Jacket Cable

Catalog Number	Color	Caliber AWG	Conductor Diameter	Number of Strands	Cable Diameter	Capacity 15 Cycles	Capacity 30 Cycles	Temperature (°F)	Separator	Weight (lbs/500'reel)
MPSS#2	Clear	2	.33	665/30	.53	12kA (IEC) 15 (ASTM)	11.5kA (ASTM)	-58 to 221	None	296
MPSS1/0	Clear	1/0	.44	1050/30	.65	20kA (IEC) 25kA (ASTM)	18.4kA (ASTM)	-58 to 221	None	455
MPSS2/0	Clear	2/0	.50	1323/30	.70	22kA (IEC) 31kA (ASTM)	23.6kA (ASTM)	-58 to 221	None	565
MPSS4/0	Clear	4/0	.64	2107/30	.84	35kA (IEC) 47kA (ASTM)	35.4kA (ASTM)	-58 to 221	None	871

Opaque Class "K" Red EPDM Jacket Cable

Catalog Number	Color	Caliber AWG	Conductor Diameter	Number of Strands	Cable Diameter	Capacity 15 Cycles	Capacity 30 Cycles	Temperature (°F)	Separator	Weight (lbs/500'reel)
MPSKR#2	Red	2	.32	651/30	.49	12kA (IEC) 15 (ASTM)	11.5kA (ASTM)	-58 to 221	Paper	294
MPSKR1/0	Red	1/0	.42	1050/30	.59	20kA (IEC) 25kA (ASTM)	18.4kA (ASTM)	-58 to 221	Paper	455
MPSKR2/0	Red	2/0	.47	1323/30	.63	22kA (IEC) 31kA (ASTM)	23.6kA (ASTM)	-58 to 221	Paper	539
MPSKR4/0	Red	4/0	.59	2107/30	.80	35kA (IEC) 47kA (ASTM)	35.4kA (ASTM)	-58 to 221	Paper	857

Opaque Class "M" EPDM Jacket Cable

Catalog Number	Color	Caliber AWG	Conductor Diameter	Number of Strands	Cable Diameter	Capacity 15 Cycles	Capacity 30 Cycles	Temperature (°F)	Separator	Weight (lbs/500'reel)
MPSMO#2	Orange	2	.32	1650/34	.49	12kA (IEC) 15kA (ASTM)	11.5kA (ASTM)	-58 to 194	Paper	302
MPSMO1/0	Orange	1/0	.42	2640/34	.58	20kA (IEC) 25kA (ASTM)	18.4kA (ASTM)	-58 to 194	Paper	471
MPSMO2/0	Orange	2/0	.47	3300/34	.65	22kA (IEC) 31kA (ASTM)	23.6kA (ASTM)	-58 to 194	Paper	549
MPSMO4/0	Orange	4/0	.59	5225/34	.83	35kA (IEC) 47kA (ASTM)	35.4kA (ASTM)	-58 to 194	Paper	871

Opaque Class "K" Black EPDM Jacket Cable

Catalog Number	Color	Caliber AWG	Conductor Diameter	Number of Strands	Cable Diameter	Capacity 15 Cycles	Capacity 30 Cycles	Temperature (°F)	Separator	Weight (lbs/500'reel)
MPSKB350	Black	350 MCM	.77	3432/30	1.06	40kA (IEC) 68kA (ASTM)	51.3kA (ASTM)	-58 to 194	Paper	1369
MPSKB500	Black	500 MCM	.95	5054/30	1.25	55kA (IEC) 86.3 (ASTM)	61kA (ASTM)	-58 to 194	Paper	1949

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

PINCE DE M.A.L.T.

C-Clamp, Distribution (5H)

Features

- Can be installed on all electrical facilities, apparatus, tubes, and conductors as well as various equipments (trucks, pulling equipment, etc.)
- Installation on conductor, round bus bar and grounding ball stud of 20 mm and 25 mm
- Tested to ASTM F-855-2009, IEC 61230, CAN-ULC 61230
- Stress relief to reduce cable damage and serve as a shock damper if fault occurs, which protects cable strands
- Locations on each side of clamp for 20 mm or 25 mm grounding ball studs installation, which serve as support studs for either a grounding cluster or cascade assembly
- Fitted to receive a 5/8-11 UNC threaded stud ferrule
- Lubrication chamber for upkeep of threads
- Installation eye for installing clamp with shotgun stick
- Double internal threads for fast removal
- **Tested and certified only with MPS components**

Material

Body and Eye Screw Aluminum A356T6

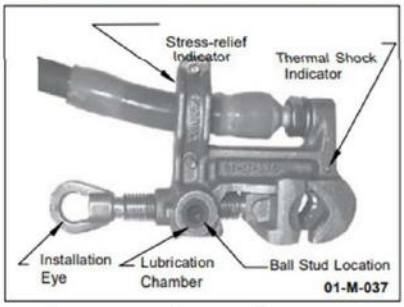

T-Handle Option

Used to attach grounding clamp by hand. Fits all MPS grounding clamps and most industry grounding clamps

Material

Aluminum

Catalog Number	Ground Stud	Jumper Cable		Main Conductor		Jaw Opening	Tested 15 Cycles	Maximum Peak	Last Cycle Peak	Weight	Std Pkg
		Min	Max	Min	Max						
01-M-034 (5H)	20 mm	2 AWG	4/0 AWG	#8 (.13)	556 (.86)	1 3/8	35kA (IEC) 47kA (ASTM)	126kA (ASTM)	70kA	1.3	20
01-M-037 (5H)	25 mm	2 AWG	4/0 AWG	#8 (.13)	795 (1.13)	1 3/8	46kA (IEC) 47kA (ASTM)	126kA (ASTM)	70kA	1.4	20

Notes:
1) For "T" Handle screw, add suffix "-T" to catalog number
2) HC-30033 ball stud can be used as a Grounding Stud with 01-M-037

Duck Bill Clamp, Distribution (5H)

Features

- Tested on continuous current at 400A with 2/0 - 35kV jumper cable
- **Tested and certified only with MPS components**
- Stress relief to reduce cable damage and serve as a shock damper if fault occurs, which protects cable strands
- Lubrication chamber for upkeep of threads

Materials

Body and Eye Screw: Aluminum A356T6

Catalog Number	Dimensions	Jumper Cable		Main Conductor		Tested 15 Cycles	Maximum / Peak	Last cycle Peak	Weight	Std Pkg
		Min	Max	Min	Max					
HCDB-117 (5H)	6.875 x 5.5 x 2.875	#2	4/0	6 AWG (.16)	900 MCM (1.162)	35kA (IEC) 47kA (ASTM)	126kA /	70kA	1.2	20
HCDB-117-S (5H)	6.875 x 5.5 x 2.875	#2	4/0	6 AWG (.16)	900 MCM (1.162)	35kA (IEC) 47kA (ASTM)	126kA /	70kA	1.2	20

Notes:
1) For Parking Stud add suffix 'P' to catalog number
2) For 'T' Handle screw add suffix 'T' to catalog number

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

PINCE DE M.A.L.T. (suite)

HC-10015A

Ball Stud Clamp, Distribution (5H)

Features

- Installation on 20 mm or 25 mm grounding ball stud
- Perfect for tight areas, switchgears, enclosures, etc.
- Fitted to receive a 5/8-11 UNC threaded stud ferrule
- Lubrication chamber for upkeep of threads
- **Tested and certified only with MPS components**

Materials

HC-10015: Tin-plated copper/zinc alloy
HC-10015A: Bronze

Catalog Number	Dimensions	Grounding Stud	Jumper Cable		Tested 15 Cycles	Maximum / Peak	Last cycle Peak	Weight	Std Pkg
			Min	Max					
HC-10015 (1H)	6.25 x 3 .25 x 1.75"	20 mm	#2	1/0	20kA (IEC) 25kA (ASTM)	41kA	23kA	1.55	1
HC-10015A (5H)	6.25 x 3.25 x 1.75"	25 mm	#2	4/0	35kA (IEC) 47kA (ASTM)	126kA	70kA	1.75	1

1) For 'T' Handle screw add suffix 'T' to catalog number

Universal Clamp, Transmission (5H / 7H)

Features

- Can be installed on all electrical facilities, apparatus, tubes, and conductors as well as various equipment (trucks, pulling equipment, etc.)
- Installation on conductor, round bus bar and grounding ball stud of 30 mm
- Tested to 5H (HC-10041) and 7H (HC-10041-A)
- **Tested and certified only with MPS components**
- Stress relief to reduce cable damage and serve as a shock damper if fault occurs, which protects cable strands
- Fitted to receive a 5/8-11 or 3/4-10 UNC threaded stud ferrule
- Lubrication chamber for upkeep of threads
- Double internal threads for fast installation and removal
- No exposed threads for minimal maintenance

Materials

Body and Eye Screw: Aluminum A356T6

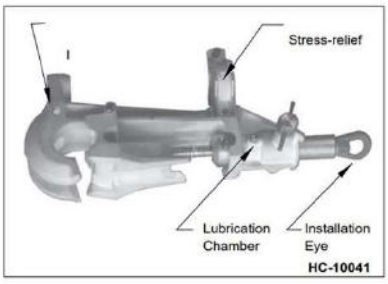

HC-10041

Catalog Number	Dimensions	Ground Stud	Jumper Cable		Main Conductor		Jaw Opening	Tested 15 Cycles	Maximum / Peak	Last cycle Peak	Weight	Std Pkg
			Min	Max	Min	Max						
HC-10041 (5H)	15.5 x 6.5 x 3.25	30 mm	#2	4/0	1/0 (.40)	1796 (1.60)	2"	55kA (IEC) 47kA (ASTM)	126kA	70kA	3.9	6
HC-10041A (7H) *	15.5 x 6.5 x 3.25	30 mm	#2	350 MCM	1/0 (.40)	1796 (1.60)	2"	55kA (IEC) 68kA(ASTM)	183kA	101kA	3.9	6

Notes: * HC-10041-A is threaded to receive 3/4 ferrules only.
For 'T' Handle screw add suffix 'T' to catalog number

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

PINCE DE M.A.L.T. (suite)

01-M-044

Features

- Can be installed on all electrical facilities, apparatus, round bus bar and flat bus bar as well as various equipment (trucks, pulling equipment etc.).
- Installation eye for use with shotgun stick
- This universal clamp can also be used on a jumper cable
- 01-M-044 fitted to receive a 5/8-11 UNC threaded stud ferrule
- 01-M-044A will fit a 30mm ball stud
- Stress relief to reduce cable damage and serves as shock damper if fault occurs
- Lubrication chamber for upkeep of thread
- **Tested and certified only with MPS components**

Benefits

- Lightweight and easy to use
- Compact design allows use in restrained areas
- Wide range taking allows for use in several grounding applications

Material

Aluminum body, keeper and eye screw A356T6

Catalog / Ground Number / stud	Jumper Cable		Jaw Opening (in).	Main Conductor (in)		Tested 15 Cycles	Maximum Peak	Last Cycle Peak	Weight (lbs)
	Min	Max		Min	Max				
01-M-044 (5H) / 25MM	#2	4/0	2 1/2	(0.13) 4 AWG	2 3/8	47kA	126kA	70 kA	2.6
01-M-044A (5H) / 30MM	350MCM	350MCM	2 1/2	(0.13) 4 AWG	2 3/8	47kA	126kA	70 kA	2.6

Notes:

1) For 'T' Handle screw add suffix 'T' to catalog number

2) 01-M-044 will fit 25 mm ball stud , 01-M-044A will fit 30 mm ball stud

01-M-048

01-M-046

Grounding Connector for 1.5" to 4.5" Tubes or Bars (5H)

Features

- Can be installed on tubes 1.5" to 4.5" O.D. and flat bars 1.5" to 4.5"
- Fitted to receive 25 mm Ball Stud, 03-M-015 Grounding Stud and 30 mm Ball Stud
- Lubrication chamber for upkeep of threads

Benefits

- Unit is installed with hot stick without the weight of the grounding cable
- Allows use of grounding cable with smaller clamps to minimize weight

Catalog Number	Connection	Jaw Opening (in).	Main Conductor (in)		Tested 15 Cycles	Maximum Peak	Last Cycle Peak	Weight (lbs)
			Min	Max				
01-M-046 (5H)	03-M-015 Gr. Stud	4 1/2	1.5" round or flat	4.5" round or flat	47 kA	126kA	70 kA	4.9
01-M-047 (5H)	25 mm Ball Stud	4 1/2	1.5" round or flat	4.5" round or flat	47 kA ASTM	126kA	70 kA	4.9
01-M-048 (5H)	30 mm Ball Stud	4 1/2	1.5" round or flat	4.5" round or flat	47 ka ASTM	126kA	70 kA	5.2
01-M-061 (5H)	03-M-015 Gr. Stud	6 5/8	4.5" round or flat	6.625" round or flat	47 Ka ASTM	126kA	70 kA	4.9
01-M-062 (5H)	25 mm Ball Stud	6 5/8	4.5" round or flat	6.625" round or flat	47 ka ASTM	126kA	70 kA	4.9
01-M-063 (5H)	30 mm Ball Stud	6 5/8	4.5" round or flat	6.625" round or flat	47 ka ASTM	126kA	70 kA	5.2

Note: 01-M-046 was tested at 68 kA with a Peak Current of 183 kA and last cycle at 101 kA

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ACCESSOIRES DE M.A.L.T.

Temporary Underground Elbow Assemblies

Features

- Each custom grounding elbow assembly is supplied with 6 feet of cable

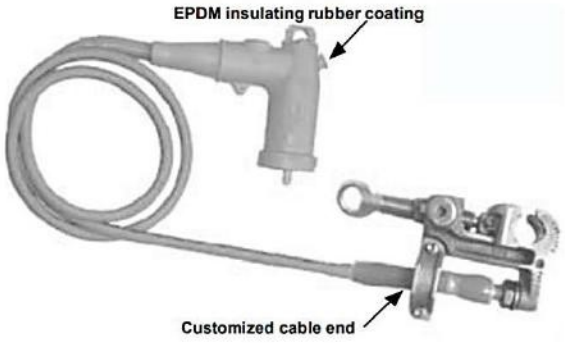

Z15 - B - 2/0 - Y - 6

Voltage		
Z15	=	15kV Elbow
Z25	=	25kV Elbow
Z35	=	35kV Elbow

Cable Size		
1/0	=	1/0 AWG (2H)
2/0	=	2/0 AWG (3H)

Cable Length
Cable length in feet

Jacket Type		
Y	=	Grounding Cable - yellow opaque jacket

Customized Cable End		
B	=	25 mm Universal Grounding Clamp 01-M-037
H	=	20 mm Universal Grounding Clamp 01-M-034
D	=	Duck Bill Clamp HCDB-117
C	=	01-M-044 C Clamp
M	=	Cable with ferrule
E	=	Exception

Jumpering Assemblies

Jumpering Assemblies

Features

- All suggested clamps are rated 400 Amps continuous rating
- This rating depends on the jumper cable rating
- Pre-assembled with a 5/8 - 11 UNC ferrule at each end
- Ends sealed with sealing tapes and clear heat shrink tubes
- Storage straps included

Ferrules

OC & CC clamps

DP - D - 15 - 1/0 - 6

Cable End 1		
D	=	Duck Bill Clamp HCDB-117
DP	=	Duck Bill Clamp with parking stud HCDB-117P
OC	=	Yellow opaque #6 SOL-954 MCM clamp
CC	=	Clear #6 SOL-954 ACSR clamp
S	=	Cable with ferrules

Cable End 2		
D	=	Duck Bill Clamp HCDB-117
DP	=	Duck Bill Clamp with parking stud HCDB-117P
OC	=	Yellow opaque #6 SOL-954 MCM clamp
CC	=	Clear #6 SOL-954 ACSR clamp
S	=	Cable with ferrules

Cable Length
Cable length in feet

Cable Insulation and Size

Cable Insulation (kV)	Size (AWG)	No of Strands	O.D. (In)	Current Rating	Jacket Color
2	4/0	551	0.841	400	Black
15	#2	259	0.780	200	Red
15	1/0	259	0.865	250	Red
15	2/0	259	0.910	300	Red
15	4/0	437	1.052	400	Red
25	1/0	413	1.113	260	Red
25	2/0	266	1.116	300	Red
35	1/0	427	1.270	250	Red

HCDB-117P

Optional Jumper cable carriage bag

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ACCESSOIRES DE M.A.L.T. (suite)

Grounding Cluster Block

Features

- For installation on a pole or structure. The 11.5" bar accepts up to four grounding clamps
- Block also has two threaded holes to accept 5/8 - 11 UNC ferrules
- Rating: 47kA ASTM F-855-2009

Materials

Bar: 3/4" tinned copper

Catalog Number	Mounting	Weight (Lbs)	Std Pkg
HC-10111	Chain tightener	6.7	2

Temporary Grounding Rod

Features

- A time saving product for maintenance or testing where there is no permanent ground. It can also be used for applications where there is no system neutral
- T-Lug is provided for a maximum 2/0 ground cable
- If required, compression type threaded ferrules can also be used for ground cable connection

Materials

Auger bit and handle: Bronze alloy
Shaft: Copperweld

Catalog Number	Maximum Conductor Size	Overall Dimensions	Weight (Lbs)
133007	2/0 AWG class "K"	1/2" diameter x 6 feet	29.0

Grounding block

Three Way Grounding Block (5H)

Features

- Connection joint in a temporary grounding three phase assembly
- Tested up to 47kA (ASTM) and 35kA (IEC)
- **Tested and certified only with MPS components**

Materials

Aluminum 6061-T6

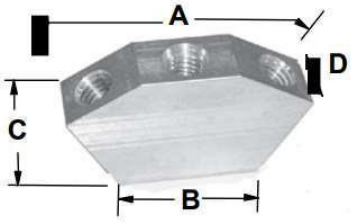

Catalog Number	Jumper Cable		Dimension				Capacity 15 Cycles	Capacity 30 Cycles	Weight (Lbs)
	Min	Max	A	B	C	Thread			
HC-10093 (5H)	2 AWG	4/0 AWG	3 3/4	2 3/8	2	1	35 kA (IEC) 47kA (ASTM)	35.4kA (ASTM)	0.3

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ACCESSOIRES DE M.A.L.T. (suite)

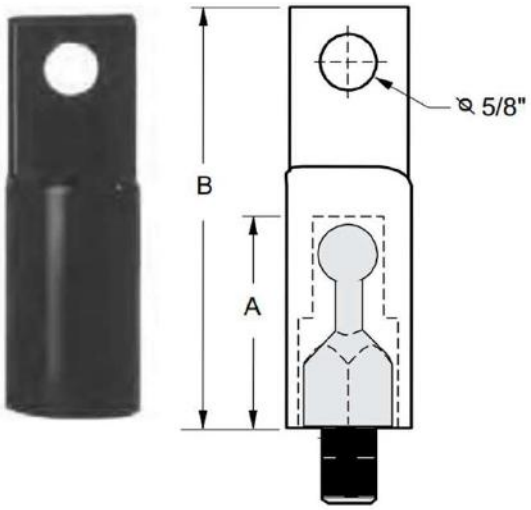

Insulated Protective Cap

Features

- Used to insulate 20 mm, 25 mm or 30 mm grounding ball studs and protects from contamination
- Handle for installation with a shotgun stick

Materials

Polyurethane

Catalog Number	Dimensions		Ground Stud	Weight	Std Pkg
	A	B			
01-P-064	2 1/2	4 5/8	20 mm	0.20	1
01-P-064-25	3 1/4	5 7/8	25 mm	0.24	1
01-P-064-30	4 5/8	7 1/4	30 mm	0.46	1

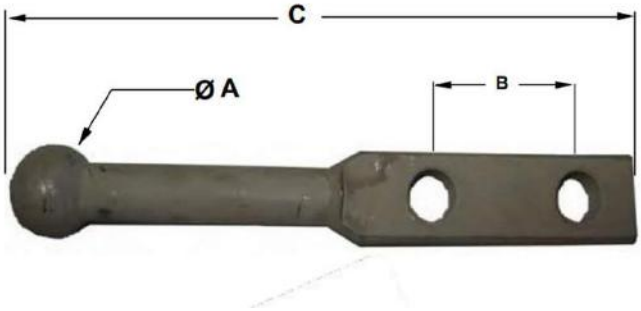

Grounding Ball Stud for NEMA Pad Connections (5H)

Features

- Grounding ball stud allowing the installation on NEMA Pad

Materials

99.9% electrolytic tin-plated copper

Catalog Number	Dimensions			Weight	Std Pkg
	A	B	C		
HC-30044	25 mm	1 3/4	7 1/4	0.3	1

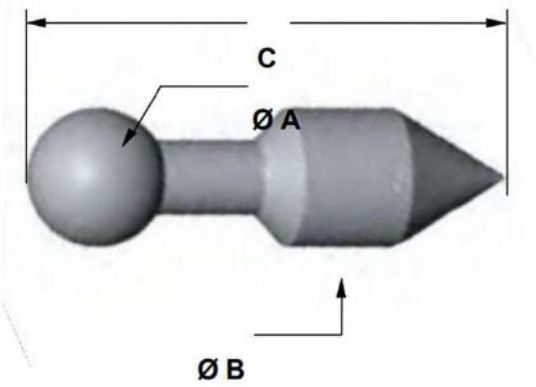

Grounding Ball Stud for CADWELD Connections

Features

- Permanent welded grounding ball stud allowing the installation of either a universal or ball stud grounding clamp to a steel structure
- Grounding ball stud can be installed in most inaccessible areas

Materials

99.9% electrolytic tin-plated copper

Catalog Number	Dimensions			Weight	Std Pkg
	A	B	C		
HC-30055-20	20 mm	5/8	2 25/32	0.2	1

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ACCESSOIRES DE M.A.L.T. (suite)

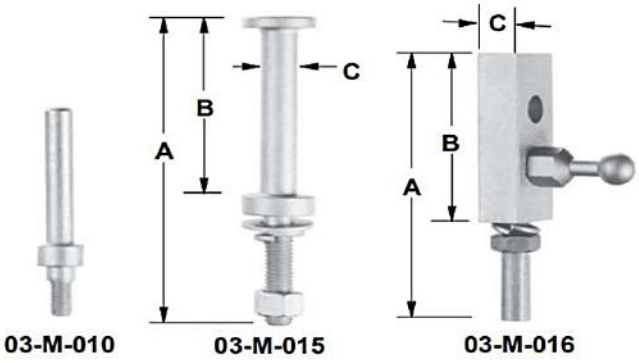

Grounding Studs and Terminals

Features

- Can be installed on all electrical facilities such as apparatus, tubes, conductors, tracks, pulling equipment, etc

Catalog Number	Description	Connector Material	Dimensions				Capacity 15 Cycles	Capacity 30 Cycles	Weight (Lbs)	Std Pkg
			A	B	C	Thread				
03-M-010	Grounding Stud	Tin-Plated Copper	3 5/8	2 23/64	7/16	3/8 - 16 UNC	12kA (IEC) 15kA (ASTM)	11.5kA (ASTM)	0.1	25
03-M-015	Grounding Stud	Tin-Plated Copper	7 1/8	4 1/8	3/4	5/8 - 11 UNC	55kA (IEC) 68kA (ASTM) Grade 7H	51.3kA (ASTM)	1.2	25
03-M-016	Grounding Terminal (1/0 ferrule; 20 mm ball stud)	Aluminum Block Tin-Platted ferrule and stud	6 1/2	3 1/4	1 1/2	-	12kA (IEC) 15kA (ASTM)	11.5kA (ASTM)	0.5	25

Notes:
1) 03-M-010, 03-M-016 includes stainless steel hardware (lock washers, flat washers, and nut)
2) 03-M-015 includes bronze hardware (lock washers, flat washers, and nut)
3) For 25 mm ball stud installed on 03-M-016, add suffix "-25" to catalog number

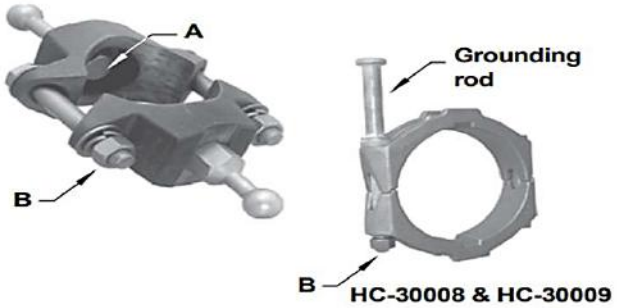

Grounding Connector for Tube

Features

- Permanent ball grounding connector to install on vertical riser tube, solid rod or connector for easy installation of temporary grounding sets
- Meets ASTM and IEC standards
- Stainless steel hardware included

Materials

HC-30005/6/7
Connector: Bronze
Ball Stud: 99.9% electrolytic tin-plated copper
HC-30008/9
Connector: Aluminum
Ball Stud: 99.9% electrolytic tin-plated copper

Catalog Number	Tube (IPS)	External Diameter	Ball Stud Included (Catalog No.)	Bolt A	Bolt B	Capacity 15 Cycles	Capacity 30 Cycles	Weight (Lbs)	Std Pkg
HC-30005-1-25	1 1/2	1 7/8	1 X 25 mm (HC-30029)	1/2 - 13	3/8 - 16	35kA (IEC) 31kA (ASTM)	23.6kA (ASTM)	4.5	10
HC-30005-2-25	1 1/2	1 7/8	2 x 25 mm (HC-30029)	1/2 - 13	3/8 - 16	35kA (IEC) 31kA (ASTM)	23.6kA (ASTM)	5.0	10
HC-30006-1-25	2	2 3/8	1 x 25 mm (HC-30029)	1/2 - 13	1/2 - 13	35kA (IEC) 31kA (ASTM)	23.6kA (ASTM)	4.5	10
HC-30006-2-25	2	2 3/8	2 x 25 mm (HC-30029)	1/2 - 13	1/2 - 13	35kA (IEC) 31kA (ASTM)	23.6kA (ASTM)	5.1	10
HC-30007-1-25	2 1/2	2 7/8	1 x 25 mm (HC-30029)	1/2 - 13	1/2 - 13	35kA (IEC) 31kA (ASTM)	23.6kA (ASTM)	4.5	10
HC-30007-2-25	2 1/2	2 7/8	2 x 25 mm (HC-30029)	1/2 - 13	1/2 - 13	35kA (IEC) 31kA (ASTM)	23.6kA (ASTM)	5.0	10
HC-30008	3 1/2	4	1 x Ground Rod (03-M-014)	-	5/8 - 11	35kA (IEC) 47kA (ASTM)	35.4kA (ASTM)	2.6	10
HC-30009	6	6 5/8	1 x Ground Rod (03-M-014)	-	5/8 - 11	35kA (IEC) 47kA (ASTM)	35.4kA (ASTM)	2.7	10

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ACCESSOIRES DE M.A.L.T. (suite)



Grounding Connector for Conductor or Tube

Features

- Permanent ball stud grounding connector to install on vertical riser tube, solid rod, or conductor for easy installation of temporary grounding sets
- Meets ASTM and IEC standards
- Stainless steel hardware included

Materials

Connector: Aluminum
Ball Stud: 99.9% electrolytic tin-plated copper

Catalog Number	Conductor Min	Conductor Max	Tube (O.D.)	Connector Material	Bolt A	Capacity 15 Cycles	Capacity 30 Cycles	Weight (Lbs)	Std Pkg
03-M-017-25	1/0 AWG	4/0 AWG	1/2	Aluminum	5/16	12kA (IEC) 25kA (ASTM)	18.4kA (ASTM)	0.9	10
03-M-018-25	4/0 AWG	350 MCM	5/8	Aluminum	3/8	12kA (IEC) 31kA (ASTM)	23.6kA (ASTM)	1.1	10
03-M-019-25	350 MCM	500 MCM	3/4	Aluminum	3/8	12kA (IEC) 31kA (ASTM)	23.6kA (ASTM)	1.2	10
03-M-020-25	1/0 AWG	2/0 AWG	3/8	Bronze	5/16	12kA (IEC) 15kA (ASTM)	11.5kA (ASTM)	0.9	10
03-M-021-25	2/0 AWG	4/0 AWG	1/2	Bronze	5/16	22kA (IEC) 25kA (ASTM)	18.4kA (ASTM)	1.1	10
03-M-022-25	4/0 AWG	350 MCM	5/8	Bronze	3/8	22kA (IEC) 31kA (ASTM)	23.6kA (ASTM)	1.3	10
03-M-023-25	350 MCM	500 MCM	3/4	Bronze	3/8	22kA (IEC) 31kA (ASTM)	23.6kA (ASTM)	1.5	10
HC-10019-25	500 MCM	750 MCM	7/8	Bronze	7/16	35kA (IEC) 31kA (ASTM)	23.6kA (ASTM)	2.0	10
HC-10020-25	750 MCM	1000 MCM	1	Bronze	1/2	35kA (IEC) 31kA (ASTM)	23.6kA (ASTM)	2.9	10
HC-10021-25	500 MCM	750 MCM	7/8	Aluminum	1/2	35kA (IEC) 47kA (ASTM)	35.4kA (ASTM)	3.9	10
HC-30023-25	1750 MCM	2500 MCM	1 9/16	Aluminum	1/2	35kA (IEC) 31kA (ASTM)	23.6kA (ASTM)	4.1	10
HC-30024-25	1000 MCM	1300 MCM	1 1/8	Bronze	1/2	35kA (IEC) 47kA (ASTM)	35.4kA (ASTM)	2.1	10
HC-30024-25-T	1000 MCM	1300 MCM	1 1/8	Tinned Bronze	1/2	35kA (IEC) 47kA (ASTM)	35.4kA (ASTM)	2.1	10
HC-30032-25	1500 MCM		1 1/4	Bronze	1/2	35kA (IEC) 31kA (ASTM)	23.6kA (ASTM)	2.5	10

HC-30025

Ball Stud Grounding Connector (5H)

Features

- Permanent ball grounding connector to install on conductor or tubes for easy installation of temporary ground sets
- Stainless steel hardware included

Materials

Connector: Aluminum A356T6
Ball Stud: 99.9% electrolytic tin-plated copper

Catalog Number	Conductor	Ball Stud Included (Catalog No.)	Bolt A	Capacity 15 Cycles	Capacity 30 Cycles	Weight (Lbs)	Std Pkg
HC-30025-20	1796 and 4000 MCM	20 mm (03-M-006)	5/8 - 11 UNC	35kA (IEC) 47kA (ASTM)	35kA (ASTM)	10.9	10
HC-30025-25	1796 and 4000 MCM	25 mm (HC-30029)	5/8 - 11 UNC	35kA (IEC) 47kA (ASTM)	35.4kA (ASTM)	10.9	10
HC-30025-30	1796 and 4000 MCM	30 mm (HC-30012)	5/8 - 11UNC	35kA (IEC) 47kA (ASTM)	35.4kA (ASTM)	10.9	10

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ACCESSOIRES DE M.A.L.T. (suite)

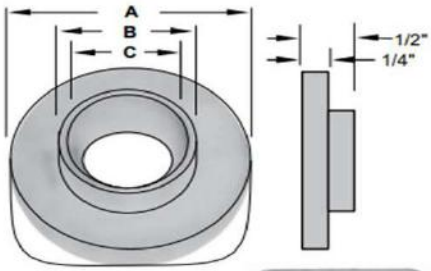

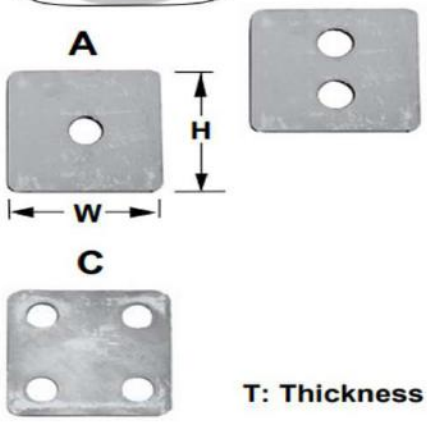

Ferrule Adapter

Features

- Serves as an interface between a jumper cable equipped with a stud ferrule, a grounding clamp, or apparatus
- Fitted to receive a 5/8 - 11 UNC threaded stud ferrule
- Shock damper reduces stress to cable

Materials

Bronze

Catalog Number	Jumper Cable		Capacity 15 Cycles	Capacity 30 Cycles	Weight (Lbs)
	Min	Max			
HC-10043	#2	4/0	35 kA (IEC) 47kA (ASTM)	35.4kA (ASTM)	1.2

Grounding Assembly Carrying Bag

Features

- Orange carrying bag to permit storage and handling of up to three grounding assemblies

Material

Orange vinyl 19 oz

Catalog Number	Dimensions
01-C-025-25	25 x 25 x 2"

Reducer Spacer

Features

- Reduces a 5/8" diameter hole in a grounding plate to a 1/2" hole for a grounding ball stud installation

Materials

99.9% electrolytic tin-plated copper

Catalog Number	Dimensions			Capacity 15 Cycles	Capacity 30 Cycles	Weight (Lbs)
	A	B	C			
HC-10016	1 1/4	5/8	17/32	35 kA (IEC) 47kA (ASTM)	35.4kA (ASTM)	0.10

Grounding Plates (5H)

Features

- Permits installation of a grounding ball stud on a galvanized steel surface or any other surface to increase contact surface

Materials

99.9% electrolytic tin-plated copper

Catalog Number	Type	Dimensions			Capacity 15 Cycles	Capacity 30 Cycles	Weight (Lbs)
		T	W	H			
HC-30053	A	1/4	2.0	4.5	35kA (IEC) 47kA (ASTM)	35.4kA (ASTM)	0.8
HC-30052	A	1/4	2.5	3.6	35kA (IEC) 47kA (ASTM)	35.4kA (ASTM)	0.8
HC-30021	A	1/4	3.0	3.0	35kA (IEC) 47kA (ASTM)	35.4kA (ASTM)	0.9
HC-30051	A	3/8	2.0	4.5	35kA (IEC) 47kA (ASTM)	35.4kA (ASTM)	1.2
HC-30050	A	3/8	2.5	3.6	35kA (IEC) 47kA (ASTM)	35.4kA (ASTM)	1.2
HC-30022	A	3/8	3.0	3.0	35kA (IEC) 47kA (ASTM)	35.4kA (ASTM)	0.9
HC-30054	B	1/4	3.0	6.0	35kA (IEC) 47kA (ASTM)	35.4kA (ASTM)	1.6
HC-30017	C	1/4	3.0	3.0	35kA (IEC) 47kA (ASTM)	35.4kA (ASTM)	0.4

Notes:
1) To specify for 5/8" hardware, add suffix "-5/8". To specify for 1/2" hardware, add suffix "-1/2".

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

TERMINAISON DE CÂBLE À FROID (COLD SHRINK)

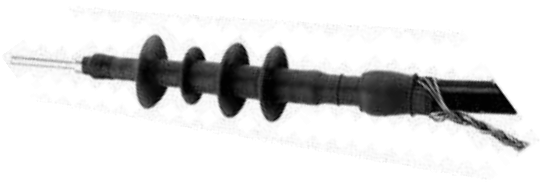

	kV CLASS	TYPE	CABLE RANGE		CATALOG NUMBER		
			INCHES	MM	CONCENTRIC NEUTRAL AND JACKETED CONCENTRIC NEUTRAL CABLE	TAPE SHIELD, WIRE SHIELD AND UNISHIELD CABLE	LC SHIELD, WIRE OVER TAPE SHIELD AND TAPE SHIELD CABLE
	15	Indoor	0.64 to 1.12	16.3 to 28.4	R2IT15J1	R2IT15M1	R2IT15L1
			0.84 to 1.38	21.3 to 35.1	R2IT15J2	R2IT15M2	R2IT15L2
			1.30 to 2.10	33.0 to 53.3	R2IT15J4	R2IT15M4	R2IT15L4
	15	Outdoor	0.64 to 1.12	16.3 to 28.4	R2T15J1	R2T15M1	R2T15L1
			0.84 to 1.38	21.3 to 35.1	R2T15J2	R2T15M2	R2T15L2
			1.30 to 2.10	33.0 to 53.3	R2T15J4	R2T15M4	R2T15L4
	25/28	Outdoor	0.84 to 1.38	20.3 to 35.1	R2T28J2	R2T28M2	R2T28L2
			1.30 to 2.10	33.0 to 53.3	R2T28J4	R2T28M4	R2T28L4
	35	Outdoor	0.84 to 1.38	20.3 to 35.1	R2T35J2	R2T35M2	R2T35L2
			1.30 to 2.10	33.0 to 53.3	R2T35J4	R2T35M4	R2T35L4

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

CONNECTEURS

CONNECTEUR HAUTE ET MOYENNE TENSION

SECTION 11 - BOLTED TERMINALS			
CABLE TO FLAT PAD		PIPE TO FLAT PAD	

11-1	11-1A	11-2	11-2A
PIPE TO FLAT PAD EXPANSION		UNIVERSIAL CROSS CABLE TO FLAT PAD	

11-2EX	11-2AEX	11-3
DOUBLE CABLE TO FLAT PAD		TRIPLE CABLE TO FLAT PAD





11-4	11-4A	11-4-3COND	11-4A-3COND
CABLE TO FLAT (EYE)		CABLE TO FLAT PAD (EYE)	

11-5	11-6	11-7	11-8

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

CONNECTEUR HAUTE ET MOYENNE TENSION (suite)

SECTION 11 - BOLTED TERMINALS CABLE TO FLAT PAD (EYE)	
11-9	11-10

SECTION 12 - BOLTED TEE CONNECTORS			
PIPE TO PIPE, TEE		PIPE TO ANGLE PIPE	
			
12-1	12-1A	12-2	12-2A
PIPE TO DOUBLE PIPE		PIPE TO CABLE, TEE	

12-3	12-3A	12-4	12-4A
PIPE TO DOUBLE CABLE, TEE		PIPE TO FLAT PAD, TEE	

12-4-2T	12-4A-2T	12-5	12-5A

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

CONNECTEUR HAUTE ET MOYENNE TENSION (suite)

SECTION 12 - BOLTED TEE CONNECTORS			
CABLE TO CABLE, TEE		CABLE TO PIPE, TEE	

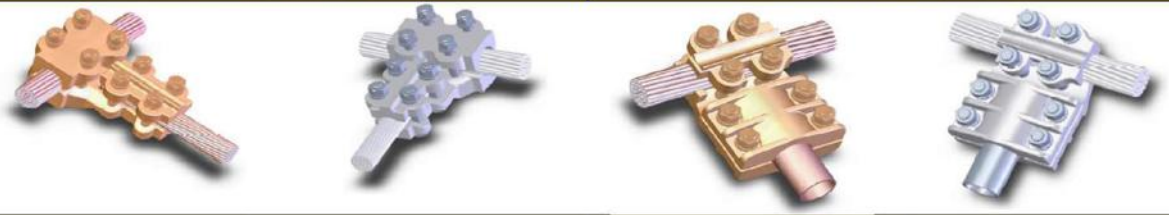

12-6	12-6A	12-7	12-7A
	CABLE TO FLAT PAD, TEE		

12-8	12-8A

SECTION 13 - BOLTED COUPLERS			
PIPE TO PIPE		PIPE TO CABLE	

13-1	13-1A	13-2	13-2A
PIPE TO PIPE ELBOW		PIPE TO PIPE VARIABLE ANGLE ELBOW	

13-3	13-3A	13-3-VA	13-3A-VA

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

CONNECTEUR HAUTE ET MOYENNE TENSION (suite)

SECTION 14 - BOLTED STUD CONNECTORS			
STUD TO PIPE		STUD TO CABLE	
14-1	14-1A	14-2	14-2A
STUD TO CABLE "+"	STUD TO 2 CABLES "+"	STUD TO FLAT PAD	
			
14-2WRX	14-2WRX2	14-3	14-3A

SECTION 15 - BOLTED EXPANSION TERMINALS AND CONNECTORS			
PIPE TO FLAT PAD		PIPE TO PIPE	
15-1	15-1A	15-2	15-2A
EXPANSION BUS SUPPORTS		STUD TO PIPE	
15-3	15-3A	15-4	15-4A

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

CONNECTEUR HAUTE ET MOYENNE TENSION (suite)

SECTION 15 - BOLTED EXPANSION TERMINALS AND CONNECTORS

EXPANSION CONNECTORS

15-5

15-5A

SECTION 16 - COMPRESSION FITTINGS

CABLE TO PAD

16-1

16-1A

CABLE TO PAD, TEE

16-2

16-2A

CABLE TO CABLE, TEE

16-3

16-3A

SECTION 17 - GROUND CLAMPS

CABLE TO ROD/PIPE

17-1

CABLE TO FLAT

17-2

BRAID TO ROD/PIPE

17-3

CABLE TO POST

17-4

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

CONNECTEUR HAUTE ET MOYENNE TENSION (suite)

SECTION 17 - GROUND CLAMPS			
CABLE TO ROD/PIPE	CABLE TO GROUNDING	CABLE TO GROUNDING	PIPE TO GROUNDING
17-5	17-6 PIPE TO STUD	17-6A PAD TO STUD	17-7
17-7A	17-8		

SECTION 18 - WELDMENT CONNECTORS			
PIPE TO PAD	PIPE TO PAD EX	PIPE TO PIPE, TEE	PIPE TO ANGLE PIPE
18-1 PIPE TO PIPE, VEE	18-1EX PIPE TO PIPE Y	18-2 PIPE TO PIPE COUPLER	18-3 PIPE TO PAD, TEE
18-4	18-5	18-6	18-7

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

CONNECTEUR HAUTE ET MOYENNE TENSION (suite)

SECTION 18 - WELDMENT CONNECTORS			
PIPE TO PIPE ELBOW	CABLE TO PAD	(2) CABLE TO PAD	PIPE TO CABLE, TEE

18-8	18-9	18-10	18-11
PIPE TO CABLE	PIPE TO PIPE EX/SUPPORT	PIPE TO PIPE EX	PIPE TO PAD

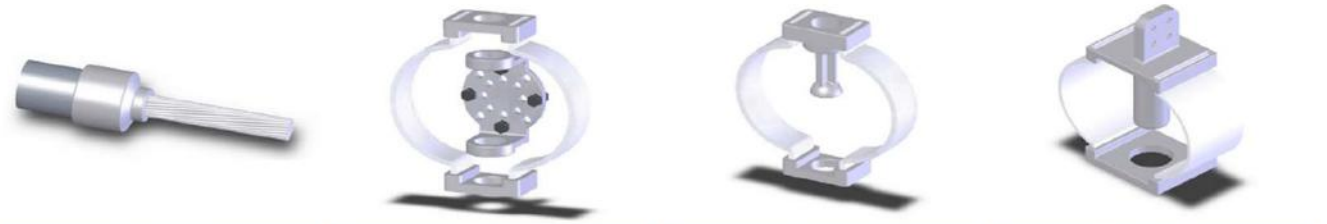

18-12	18-13	18-14	18-15
STUD TO PIPE	GROUNDING STUD	INTERNAL PLUG	EXTERNAL PLUG

18-16	18-17	18-18	18-19

SECTION 19 - BUS SUPPORTS	
PEDESTAL STYLE	OPEN BASE

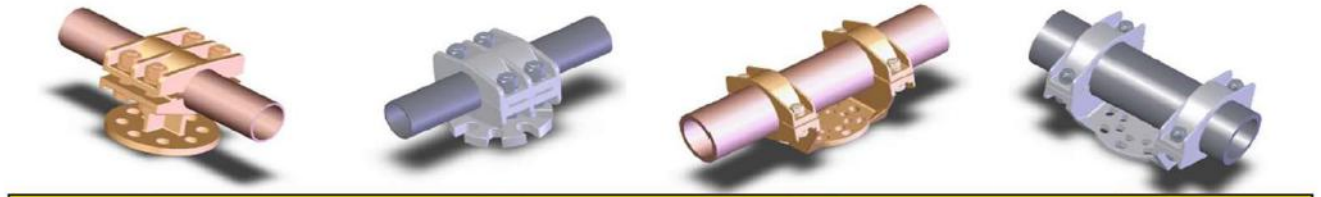

19-1	19-1A	19-2	19-2A

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

CONNECTEUR HAUTE ET MOYENNE TENSION (suite)

SECTION 19-BUS SUPPORTS			
SINGLE RING		HOOK-ON	OPEN BASE WELD

19-3	19-3A	19-4	19-5
CABLE BUS SUPPORTS		DOUBLE CABLE BUS SUPPORTS	

19-6	19-6	19-6-2CND	19-6-2CND
VERTICAL BUS WELD		VERTICAL BUS BOLTED	

19-7	19-8	19-8A
COUPLER SUPPORTS	SLIDING COUPLER SUPPORTS	

19-9	19-9A	19-10	19-10A

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

CONNECTEUR HAUTE ET MOYENNE TENSION (suite)

BOLT CIRCLE HEIGHT ADDAPTER
19-11

SECTION 110 - PARALLEL CONNECTORS		
CABLE TO CABLE		CABLE TO CABLE U-BOLT STYLE
110-1	110-1	110-1U
CABLE SPACER		CABLE SPACER, TEE

110-1CS	110-1CS	110-CST	110-CST

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

CONNECTEUR HAUTE ET MOYENNE TENSION (suite)

SECTION 111 - CORONA BELLS AND FLEXIBLE BRAIDS			
INTERNAL CORONA BELLS		EXTERNAL CORONA BELLS	
			
111-1	111-1	111-2	111-2

FLEXIBLE BRAIDS
111-3

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

CONNECTEUR À COMPRESSION

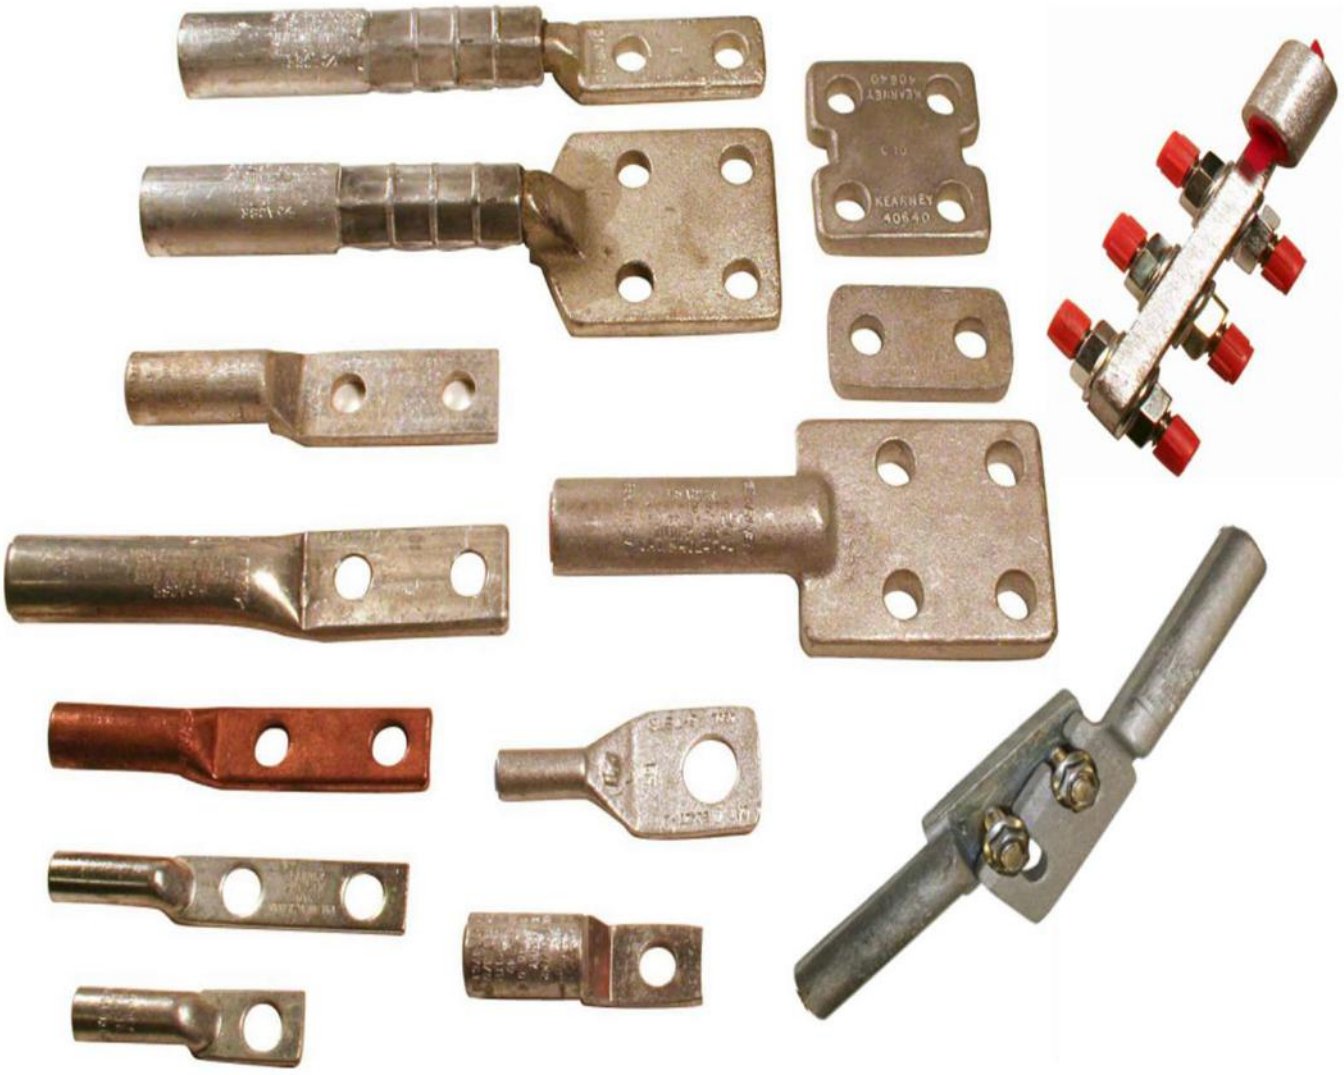

DISPONIBLE EN ALUMINIUM ET/OU CUIVRE

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

CONNECTEUR À COMPRESSION (suite)

Two-hole and four-hole cast aluminum terminals

Eaton's Cooper Power™ series two-and four-hole cast aluminum terminals are dead soft cast aluminum fittings that are designed for terminating jumpers and taps or connecting to other types of fittings. Ends of fittings are pre-filled with Eaton's Cooper Power series Kearnalex™ inhibitor and closed with a plastic cap. The 104741 Series, with two-hole pads, can be installed with either mechanical or hydraulic tools.

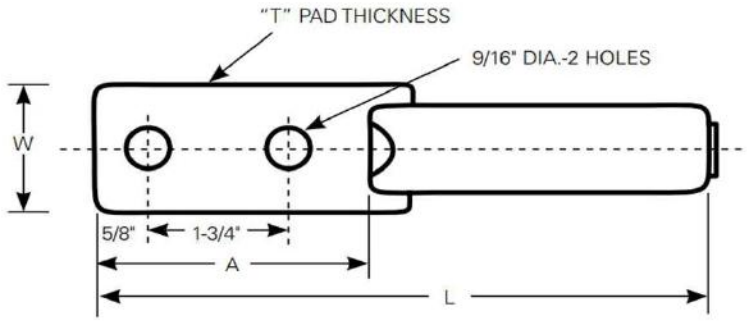

Table 1. Two-hole cast aluminum terminals

Conductor size				Catalog number	Dimensions (inches)				Tools & Dies	BURNDY®
Aluminum or Copper		ACSR			L	W	T	A	(No. of Indents)	Die Index
#1, #2	7-19 Str.	#2		**104741-1**	5 3/4	1-1/4	1/4	3-1/8	O-Tool 840 (7) or 845 (5) WH 840 (5) 840-Wide (1)	249
1/0	7-19 Str.	1/0		**104741-2**						
2/0	7-19 Str.	2/0		**104741-3**						
3/0	7-19 Str.	3/0		**104741-4**						
4/0	7-19 Str.	4/0		**104741-5**						
250-266	19 Str.	266.8	18/1	**36364-9**	6	1-1/4	3/8	3-1/4	WH 1 1/8-2 (3)	317
300-350	19 Str.	266.8	26/7	**36364-8**						
336	19 Str.	336.4	18/1	**36364-2**						
397	19 Str.	336.4	26/7-30/7	**36364-3**						655
		397.5	18/1							
450-477	19-37 Str.	397.5	26/7	**40133CPS**	7	1-11/16	9/16	3-1/4	WH 1-1/2 (5)	724
477-500	19-37 Str.	477	18/1	**40133-1**						
		397.5	30/7							
500-556	19-37 Str.	477	24/7-26/7	**40133-2**						
		556.5	18/1							
600-650	37 Str.	477	30/7	**40133-3**						
		556.5	26/7-24/7							
700	37-61 Str.	636	18/1	**40133-4**						
		605	26/7							
		556.5	30/7							
715-750	37-61 Str.	666	24/7	**40133-5**						
		605	30/19							
		636	26/7							
		666	54/7							
750-800	37-6 1 Str.	636	30/19	**40133-6**						
		715.5	54/7							
900	19-37 Str.	715.5	26/7	**40133-7**						
		795	45/7-36/1							
954	37-61 Str.	795	26/7	**40133-9**						
1000	37-61 Str.	795	30/19	**40133-10***						
		874	54/7							
1033	37-61 Str.	900	54/7	**40133-11***						
		954	45/7							

* For Aluminum or ACSR only.

Note: For tin plating add TP to the end of the part number. Example: 40133-1 without plating, 401331TP with tin plating. For 40133CPS remove "CPS" and add TP to the end of the number.

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

CONNECTEUR À COMPRESSION (suite)

Two- and four-hole cast aluminum terminals

Two-hole and four-hole cast aluminum terminals

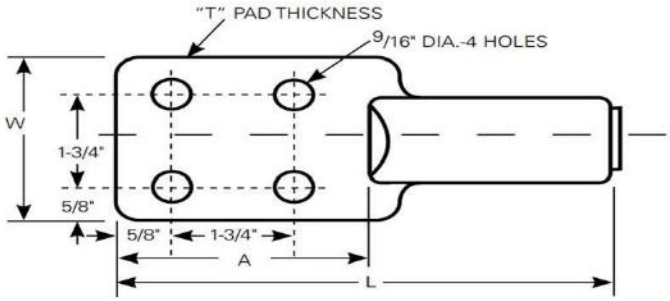

Table 2. Four-hole cast aluminum terminals

Conductor size				Catalog number	Dimensions (inches)				Tools & Dies	BURNDY®
Aluminum or Copper		ACSR			L	W	T	A	(No. of Indents)	Die Index
2/0 3/0 4/0 250-266 300-350 336 397	7-19 Str. 7-19 Str. 7-19 Str. 19 Str. 19 Str. 19 Str. 19 Str.	2/0 3/0 4/0 266.8 266.8 336.4 336.4 397.5	 18/1 26/7 18/1 26/7-30/7 18/1	**40247-2** **40247-3** **40247-4** **40247-8** **40247-5** **40247-7** **40247-6**	7-11/16	3	9/16	3-1/4	WH 1-1/8-2 (5)	317 655
450-477	19-37 Str.	397.5	26/7	**40603**						
477-500	19-37 Str.	477 397.5	18/1 30/7	**40603-1**						
500-556	19-37 Str.	477 556	24/7-26/7 18/1	**40603-2**						
600-650	37 Str.	477 556	24.7 26/7-24/7	**40603-3**						
700	37-61 Str.	636 605 556	18-1 26/7 30/7	**40603-4**	7	3	9/16	3-1/4	WH 1-1/2 (5)	724
715-750	37-61 Str.	666 605 636 666	24/7 30/19 26/7 54/7	**40603-5**						
750-800	37-61 Str.	636 715	30/19 54/7	**40603-6**						
900	19-37 Str.	715.5 795	26/7 45/7-36/1	**40603-7**						
954 1000	37-61 Str. 37-61 Str.	795 795 874	26/7 30/19 54/7	**40603-9** **40603-10***	8-11/16	3	9/16	3-1/4	WH 1-1/2 (8)	724
1033	37-61 Str.	900	54/7	**40603-11***						

* For Aluminum or ACSR only.

Note: For tin plating, add TP to the end of the number. Example: 40603-5 without plating, 40603-5TP with tin plating, for 40603, add TP to the end of the number.

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

CONNECTEUR À COMPRESSION (suite)

Aluminum tubular terminals

Aluminum tubular terminals offer an aluminum compression terminal of seamless aluminum tubing with a two-hole pad used for terminating aluminum and ACSR conductors. The end is factory filled with Kearnalex inhibitor and capped.

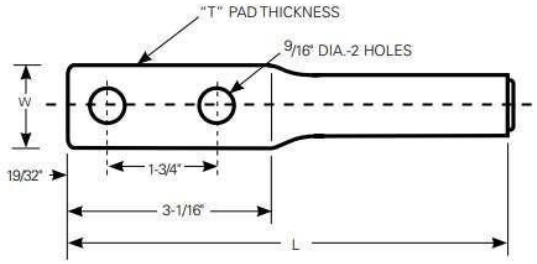

Table 3. Aluminum tubular terminals

Conductor size				Catalog number	Dimensions (inches)			Tools & Dies	BURNDY®
Aluminum or Copper		ACSR			L	W	T	(No. of Indents)	Die Index
2/0	7-19 Str.	1/0		**36233CPS**	7-1/8	1	5/16	O-Tool 737 (10) WH 737 (7)	677
3/0 4/0 –	7-19 Str. 7-19 Str.	2/0 3/0 4/0		**36234** **48212** **48160**	7-1/8 7-1/8 7-1/8	1-1/8 1-3/16 1-3/16	3/8 5/16 1/4	O-Tool 840 (12) WH 840 (8)	249
4/0 250	7-19 Str. 19-37 Str.	3/0 4/0		**36235** **36236CPS**	7-1/8 7-1/8	1-3/8 1-3/8	15/32 13/32	WH 1-2 (4)	UK1T
300 336-350	19-37 Str. 19-37 Str.	266.8 336.4	18/1-26/7 18/1	**36237CPS** **36238CPS**	8 8	1-9/16 1-9/16	7/16 13/32	WH 1-1/8-2 (5)	317 655
400	19-37 Str.	336.4 397.5	26/7-30/7 18/1	**36239CPS**	9-1/8	1-5/8	11/32	WH 1-1/8-2 (6)	317 655
477 500	19-37 Str. 37-61 Str.	477	18/1	**36950CPS**		1-11/16	9/32		

Aluminum tubular terminal

Small cast aluminum terminals

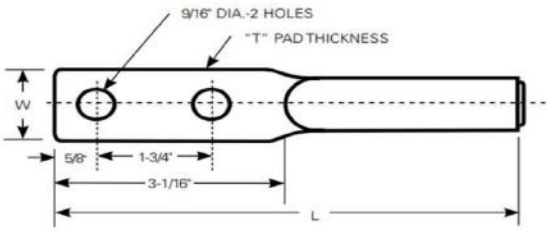

Table 4. Small cast aluminum terminals

Conductor size		Catalog number	Dimensions (inches)			Tools & Dies (No. of Indents)	BURNDY® Die Index
Aluminum or Copper	ACSR		L	W	T		
#6 Str. or #4 Sol. #4-7 Str. #1 & #2 Str.	– #4 #2	**48398** **40155CPS** **36918**	5-3/16 5-3/16 5-3/16	1 1 1	5/16 5/16 5/16	O-Tool 5/8" Nose (10) WH BKT (2)	BG
1/0 7-19 Str.	1/0	**104734**	5-1/4	1-1/4	5/16	O-Tool 737 (6) or 747 (4) WH 737 (4) or 747 (3)	677 247

Small cast aluminum terminal

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

www.fpolc.com

FP Outdoor Lighting Controls

Quality Electrical Products

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

CELLULE PHOTOÉLECTRIQUE SÉRIE FP

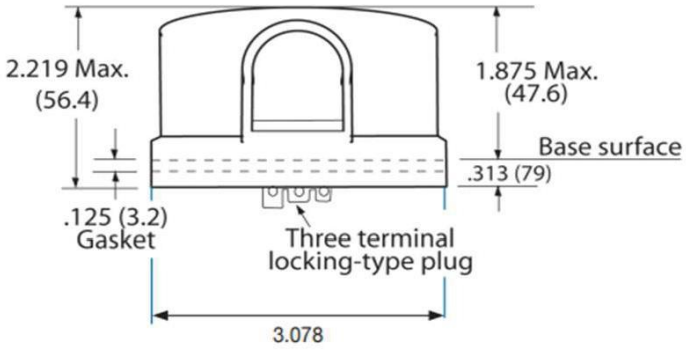

FP Series Thermal Control

The FP Series thermal, delayed turn on/turn off response locking-type, photoelectric controls are designed to meet commercial and industrial requirements. A wide, cross-linked polyethylene gasket assures moisture proof sealing with the luminaire socket.

Application

The On at Dusk and Off at dawn, delayed-response FP Series controls are designed for industrial and commercial HID luminaires equipped with locking-type receptacles. They adhere to UL and ANSI standards. (i.e. color coding, UL approval, etc.).

Specifications

Photocell:	Conformally coated cadmium sulfide photocell
Switch Type:	SPST-NC (single-pole, single-throw, normally closed) bimetallic switch
Housing:	UV-resistant, high-impact
Turn-On:	1 footcandle (fc) nominal
Turn-On/Off Ratio:	1:3
Time Delay:	30 seconds, minimum
Rated Life:	5,000 operations minimum at rated load
Temperature Range:	- 40° to + 70°C - 40° to + 158°F
Dimensions:	3.078" Dia.; 2.219"H

Ordering Information

Model	Line Voltage	160j MOV	Standard Photocell	Tungsten Load Rating	HID Load Rating
FP120	105-130V	√	√	2000W	1800VA
FP240	208-277V	√	√	2000W	1800VA
FP208-277	208-277V	√	√	2000W	1800VA

See page 12-15 for LED Controls

Not recommended for LED installations

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

CELLULE PHOTOÉLECTRIQUE SÉRIE 7700

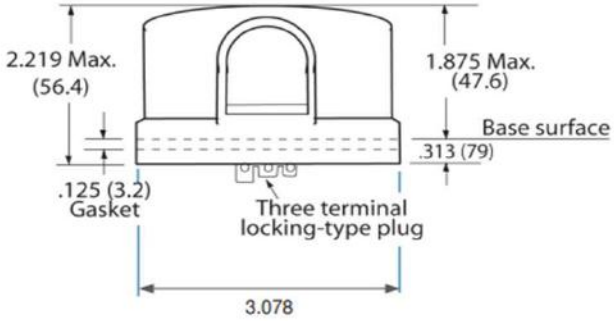

FP7700 Series locking-type photoelectric control

The FP7700 Series locking-type photoelectric controls are designed to meet stringent electric utility requirements for roadway lighting.

These photoelectric controls have provided more hours of dependable operation than any other photocontrol. Conservatively rated for 5,000 operations (13 years) on loads of 1800VA, the FP7700 Series is the industry standard.

The FP7700 Series is a highly reliable control. A wide, crosslinked polyethylene gasket assures weatherproof sealing with the luminaire socket.

Application

Series FP7700 state-of-the-art, controls are designed for industrial, commercial, street and highway luminaires equipped with locking-type receptacles. The control's "easy-to-test" instant ON feature makes it ideal for HID lighting in hard to reach locations.

Specifications

Photocell:	Silicone Sensor
Housing:	UV-resistant, high-impact, polypropylene cover with clear UV-stabilized hight impact Polycarbonate window. Meets ANSI / cUL color-coded standards
Turn-On:	1 footcandle (fc) nominal
Turn-On/Off Ratio:	1.5:1
Rated Life:	5,000 operations minimum at rated load
Temperature Range:	- 40° to + 70°C - 40° to + 158°F
Dimensions:	3.078" Dia.; 2.219"H
Surge Protection	190 MOV joule rating

Ordering Information

Model	Line Voltage	HID Load Rating	Tungsten Load Rating
FP7760-SSS	120 V	1800VA	1000W
FP7772	195-305 V	1800VA	1000W
FP7790B-SSS	105-305 V	1800VA	1000W
FP7794*	315-530 V	1800VA	1000W
FP7790B-RA**	105-305 V	1800VA	1000W

* *Not CUL Listed*
** *Reverse acting photocontrol - Not CUL Listed*
See page 12-15 for LED Controls

Not recommended for LED installations

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

CELLULE PHOTOÉLECTRIQUE SÉRIE TRS (LED)

The Real Score LED Photocontrol

Designed to meet or exceed the life expectancy of LED fixtures. The Score Control has the same proven electronic circuit as our highly reliable electronic photocontrols. Upgraded materials and environmental protections were added to The Real Score product to achieve a 20 year expected life.

Now that's a MOV

To protect the electronic components (and the LED Fixture) for 20 year expected life, The Score Control RMS clamping voltage is just above line voltage. Our 40,000 amp MOV can be expected to protect against repeated spikes/surges over a 20 year period, where smaller MOVs would not.

Unsurpassed Features for Ultra Long Life

Unsurpassed construction, electrical, process, and environmental protections make the TRS Series the highest grade twistlock photocontrol on the market today. No aspect of design was overlooked, thus eliminating any potential weak point. It is designed to meet or exceed the life expectancy of LED and Induction lights. The TRS is the best value photocontrol available.

Specifications

Load Rating:	1,000W/1,800 VA 15 Amp relay tested to 15,000 operations at 1,000 watts. AIR GAP load break has no voltage leakage
Operating Temperature:	-40°C to +70°C (-40°F to +158°)
Surge Protection:	40,000 Amps 640 Joule MOV
Power Consumption:	<0.5 Watts @ 120 V
Dielectric Strength:	5,000 Volts Between current carrying parts

Operating Voltage

Load Rating:	1000 Watt tungsten, 1800 VA
Moisture Resistance:	100% RH
Operating Light Levels:	+/- 0.1 fc. from specified turn-on level 1:1.5 Average turn-on to turn-off ratio
Photosensor:	Proprietary **Encapsulate Bat Eye Technology** circuit eliminates unintentional operation of LED fixtures, only reacts to sunlight, avoiding fixture cycling, reducing service calls. The sensor has no drift and is consistent over the service life.
Dielectric Strength:	5,000 Volts between any current carrying part
Ambient Temperature Range:	-40°C to +70°C (-40°F to + 158°F)

Ordering Information

TRS - 2 - FO

Model #
***TRS-2** (105-130V)
TRS-3 (105-305V)
TRS-4 (315-530V)
TRS-2-CUL (105-305V)

Surge Protection
_ (1) 640Joule MOV, 40,000 Amps (Standard)

Relay Option
_ 15 Amp-15,000 operations (Standard)

Fail Mode
_ Fail ON (Standard)
FO Fail OFF

Color
_ Black (standard)
_ CUL Cover Blue-
Other Colors Available upon Request

Other configurations available-Please contact Customer Service at 508-821-1597

Note: No substitution for cUL units

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

CAPUCHON DE COURT-CIRCUIT

S1039

FPS1038-1

Shorting Caps

Locking-type caps that have the physical appearance of photo-electric controls and meet ANSI C136.10 mounting specifications for roadway lighting equipment but provide a normally closed contact (fixture always ON). All caps are rated for a maximum of 15 Amps FLA.

Application

Shorting caps are used on industrial, commercial, street and highway luminaires equipped with locking-type receptacles. Shorting caps save wiring time by providing a constant ON. Several luminaires wired to the same line breaker may be controlled from a central point using a contactor or relay, as well as weatherproof protection for the socket.

Normally-Open caps (fixture always OFF) for temporary disabling of a lighting fixture are also available.

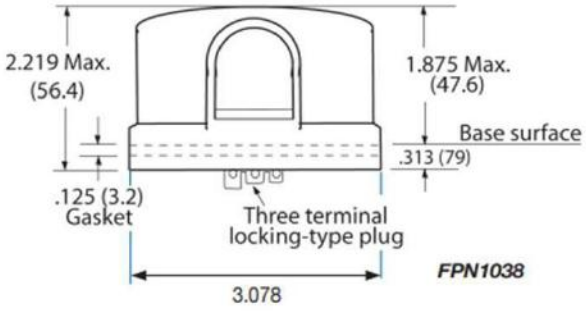

FPN1038

Specifications

Temperature Range:	- 40° to + 70°C - 40° to + 158°F
Housing:	UV-resistant high-impact polypropylene
Dimensions:	3.078" Dia.; 2.219" H
FPS1039 low profile:	Dia: 2.75" ; 1.50" H

Ordering Information

Model	Line Voltage	Contacts	Description
FPN1038-1	Up to 530V	N.C.	Shorting cap
FPN1038-3	Up to 530V	N.O.	Open Cap
FPS1038-1-MOV	Up to 530V	N.O.	Shorting Cap with MOV
S1039	Up to 480V	N.C.	Low Profile Shorting Cap

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

CELLULE PHOTOÉLECTRIQUE FA ET B



FPFA Series UL SP RoHS

Flush-Mount Controls

The FPFA Series wire-in flush-mount photocontrols provide superior performance for internal mounting requirements.
All Series FPFA controls utilize a rugged, SPST bimetallic switch. Durable, polycarbonate housing with a clear UV-stabilized window ultrasonically welded in place to prevent moisture ingress.

Application

The FPFA Series are compact, flush-mounted, high-temperature resistant controls designed for industrial, commercial, and decorative lighting fixtures. The versatility and reliability of these controls allow them to be used as replacement units in a wide range of HID outdoor lighting fixtures.

Specifications

Photocell:	Conformally coated cadmium sulfide cell
Switch Type:	SPST-NC (single-pole, single-throw, normally closed) bimetallic switch
Housing:	UV-resistant Polycarbonate (Black)
Window:	Clear, UV-stabilized Polycarbonate
Nipple:	3/8" – 18 thread; 3/4" long; fits 3/8" knockout; 11/16" opening
Leads:	15" long, color coded; 105°C wire, 1/2" stripped, 18 AWG
Turn-On:	1 to 4 footcandles (fc)
Turn-Off:	3 to 12 footcandles (fc)
Time Delay:	30 seconds, minimum
Rated Life:	5,000 operations minimum at rated load
Temperature Range:	- 40° to +70°C | - 40° to +158°F
Dimensions:	2.062"L; 1.00"W; 1.53"D

Ordering Information

Model	Line Voltage	Load Rating	
		Tungsten	HID Ballast
FPFA-105	120	2000W	1000VA
FPFA-1068	208-277	2000W	1000VA



B Series RoHS

Electronic Flush Mount Control

B Series electronic "button type" photocontrols have the same features and performance of electronic twist-lock photocontrols. Energy efficiency is maintained with tight On/Off ratios and "non-drift operation". Maintenance costs are reduced through a cool-running DC circuit.
The B Series uses the same field proven electronic circuit design as is used in Sun-Tech high performance twist-lock photocontrols.

Application

The B Series Electronic wire in controls are compact, flush-mounted, high temperature resistant controls designed for industrial, commercial, and decorative lighting fixtures. The B Series Electronic wire-in control is designed to work with LED and HID fixtures.

Specifications

Photocell:	Conformally coated cadmium sulfide cell
Switch Type:	SPST-NC (single-pole, single-throw, normally closed) bimetallic switch
Housing:	UV-resistant Polycarbonate (Black)
Window:	Clear, UV-stabilized Polycarbonate
Nipple:	3/8" – 18 thread; 3/4" long; fits 3/8" knockout; 11/16" opening
Leads:	15" long, color coded; 105°C wire, 1/2" stripped, 18 AWG
Turn-On:	1 to 4 footcandles (fc)
Turn-Off:	3 to 12 footcandles (fc)
Rated Life:	5,000 operations minimum at rated load
Temperature Range:	- 40° to +70°C | - 40° to +158°F

Ordering Information

Model	Line Voltage	Load Rating	
		Tungsten	HID Ballast
B120-1.5-PTM	120	2000W	1000VA
B124-1.5-PTM	105-305	2000W	1000VA

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

CELLULE PHOTOÉLECTRIQUE FT ET SFT



FPFT Series

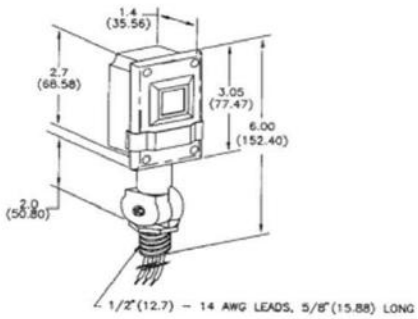

FPSFT Series

FPFT/FPSFT Contractor Grade Controls

The FPFT Series photoelectric control is enclosed in a UV-resistant rain tight polycarbonate housing with a 1/2" threaded nipple. All controls are factory calibrated to a 1.0 footcandle (fc) turn-on. The shutter allows field adjustment of turn-on.

The FPSFT Series photoelectric control incorporates a swivel mounting for positioning flexibility. All other design features and ratings are identical to the FPFT Series control described above.

Application

The FPFT/FPSFT Series spec-grade, conduit-mounted controls are designed for safety and security lighting of walkways, entrances, parking lots, farm yards, recreational and public areas. These highly reliable controls are ideal for protective lighting in schools, malls, commercial and industrial buildings. To ensure proper operation, the FPSFT swivel unit permits adjustment away from highly lit areas where the control might 'see' light from adjacent fixtures.

FPFT/FPSFT Series Wiring Diagram

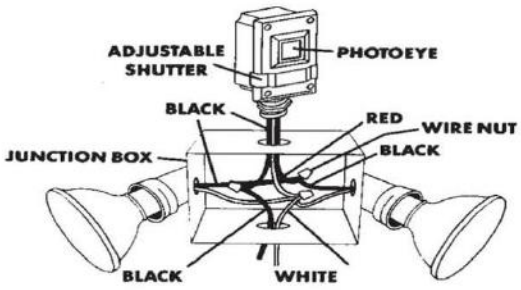

Specifications

Photocell:	Conformally coated cadmium sulfide photocell
Switch Type:	SPST-NC (single-pole, singe-throw, normally closed) bimetallic switch
Nipple:	1/2" - 14 thread; 5/8" long; fits 1/2" knockout
Leads:	15" long; color coded; 105 C wire, 1/2"stripped, 16 AWG
Turn-On:	1 to 5 footcandles (fc). Field adjustable using the sliding shutter
Turn-Off:	3 to 15 footcandles (fc)
Time Delay:	30 seconds minimum
Rated Life:	5,000 operations minimum at rated load
Temperature Range:	- 40° to + 70°C - 40° to +158°F
Dimensions:	**FPFT Series:** 3.60" L; 2.05" W; 1.4" D **FPSFT Series:** 6.00" L; 2.05" W; 1.4" D

Ordering Information

Model	Line Voltage	Load Rating	
		Tungsten	HID Ballast
FPFT15	120	2000W	1000VA
FPFT168	208-277	2000W	1000VA
FPSFT15	120	2000W	1000VA
FPSFT168	208-277	2000W	1000VA
FPFT305	105-305	1000W	1800VA
*FPSFT305	105-305	1000W	1800VA
**FPFT30	120	2000W	2000VA

*Not UL/CSA certified
**Diecast - not UL/CSA certified

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

BASE DE CELLULE PHOTOÉLECTRIQUE



FPS476-71

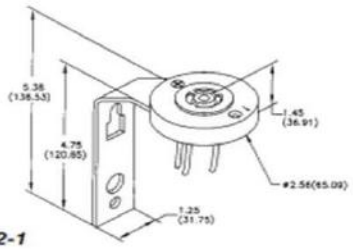

FPAT902-1

ANSI C136.41 Compliant

FPAT902-DR-7



3-Pin Mounting Receptacles

A variety of locking-type receptacles are available to meet specific application needs. Receptacles are UL recognized and CSA certified, feature 18" No. 14 AWG color coded leads, and are rated for use up to 480V and 1800VA.

Model FPS476-71

Three pole locking-type receptacle with polycarbonate housing and wall mounting bracket 1/2"– 14 thread.

Dimensions:

Socket: 2-11/16"H; 2-5/8" Dia.
Nipple: 1/2"– threaded; 5/ 8"L
Bracket: 4-3/4"H; 1-1/4"W

FPAT902-1

Receptacle assembly only.

Dimensions:

Socket: 1-9/16" H; 2-9/16" Dia.

7-Pin Dimming Receptacle

FPAT902-DR Series is ANSI C136.41 compliant dimming receptacle.

The receptacles have electrical and mechanical interconnection between an ANSI C136.41-2013 photocontrol and dimmable LED lighting fixture.

7-pin receptacle required for all LED Dimming applications (see Dimulator on pages 14-15)

Specifications

Power Lead Gauge:	AWG#14
Lead Length:	12"
Certification:	cUL

See page 14-18 for Dimming Photocontrols

Ordering Information (3-pin receptacle)

Model	Line Voltage	Load Rating		Bracket
		Tungsten	HID Ballast	
FPS476-71	up to 480V	15A max.	15A max	Includes Bracket
FPS476-81	up to 480V	15A max.	15A max	Includes Bracket
FPAT902-1	Receptacle assembly only.			No Bracket

UL recognized. CSA certified.

Ordering Information (7-pin receptacle)

Model	Line Voltage	Number of Contacts	Power Lead Grade	Load Rating	
				Tungsten	HD Ballast
FPAT902-DR-7	Up to 480VAC	7-Pin	AWM1015 600V 105C	15Amp Max	15Amp Max

Units include rubber gasket

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

CONTRÔLE DE MOTEUR

www.specialtyproducttechnologies.com

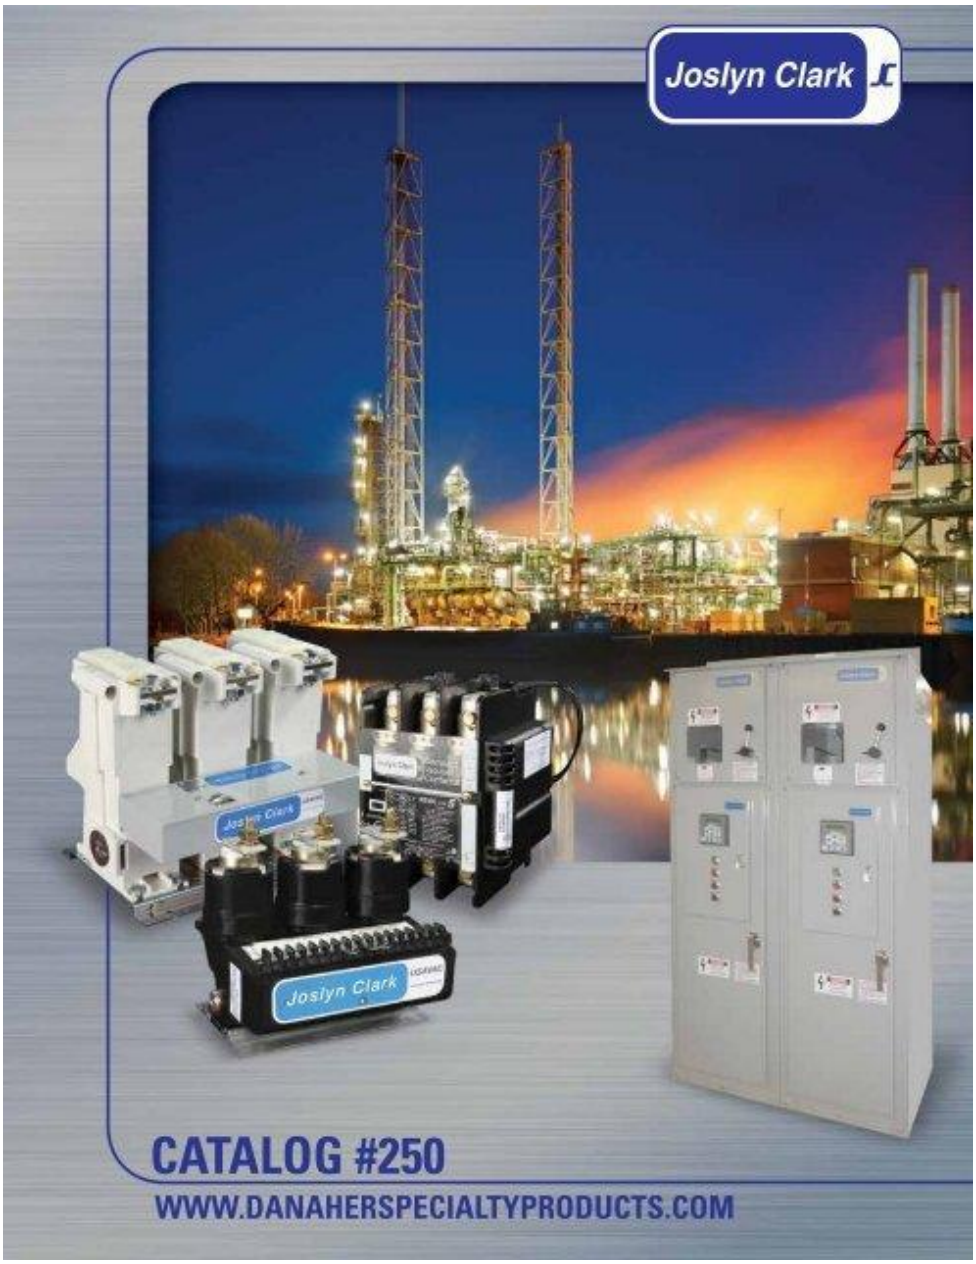

PIÈCES POUR CCL ET SYLVIANA DISPONIBLES

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

CONTRÔLE DE MOTEUR (suite)

www.springercontrols.com

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

INTERRUPTEUR AU PIED

https://linemaster.com

LINEMASTER®

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

CONTRÔLE DE TEMPÉRATURE

www.tecsystem.it/en

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

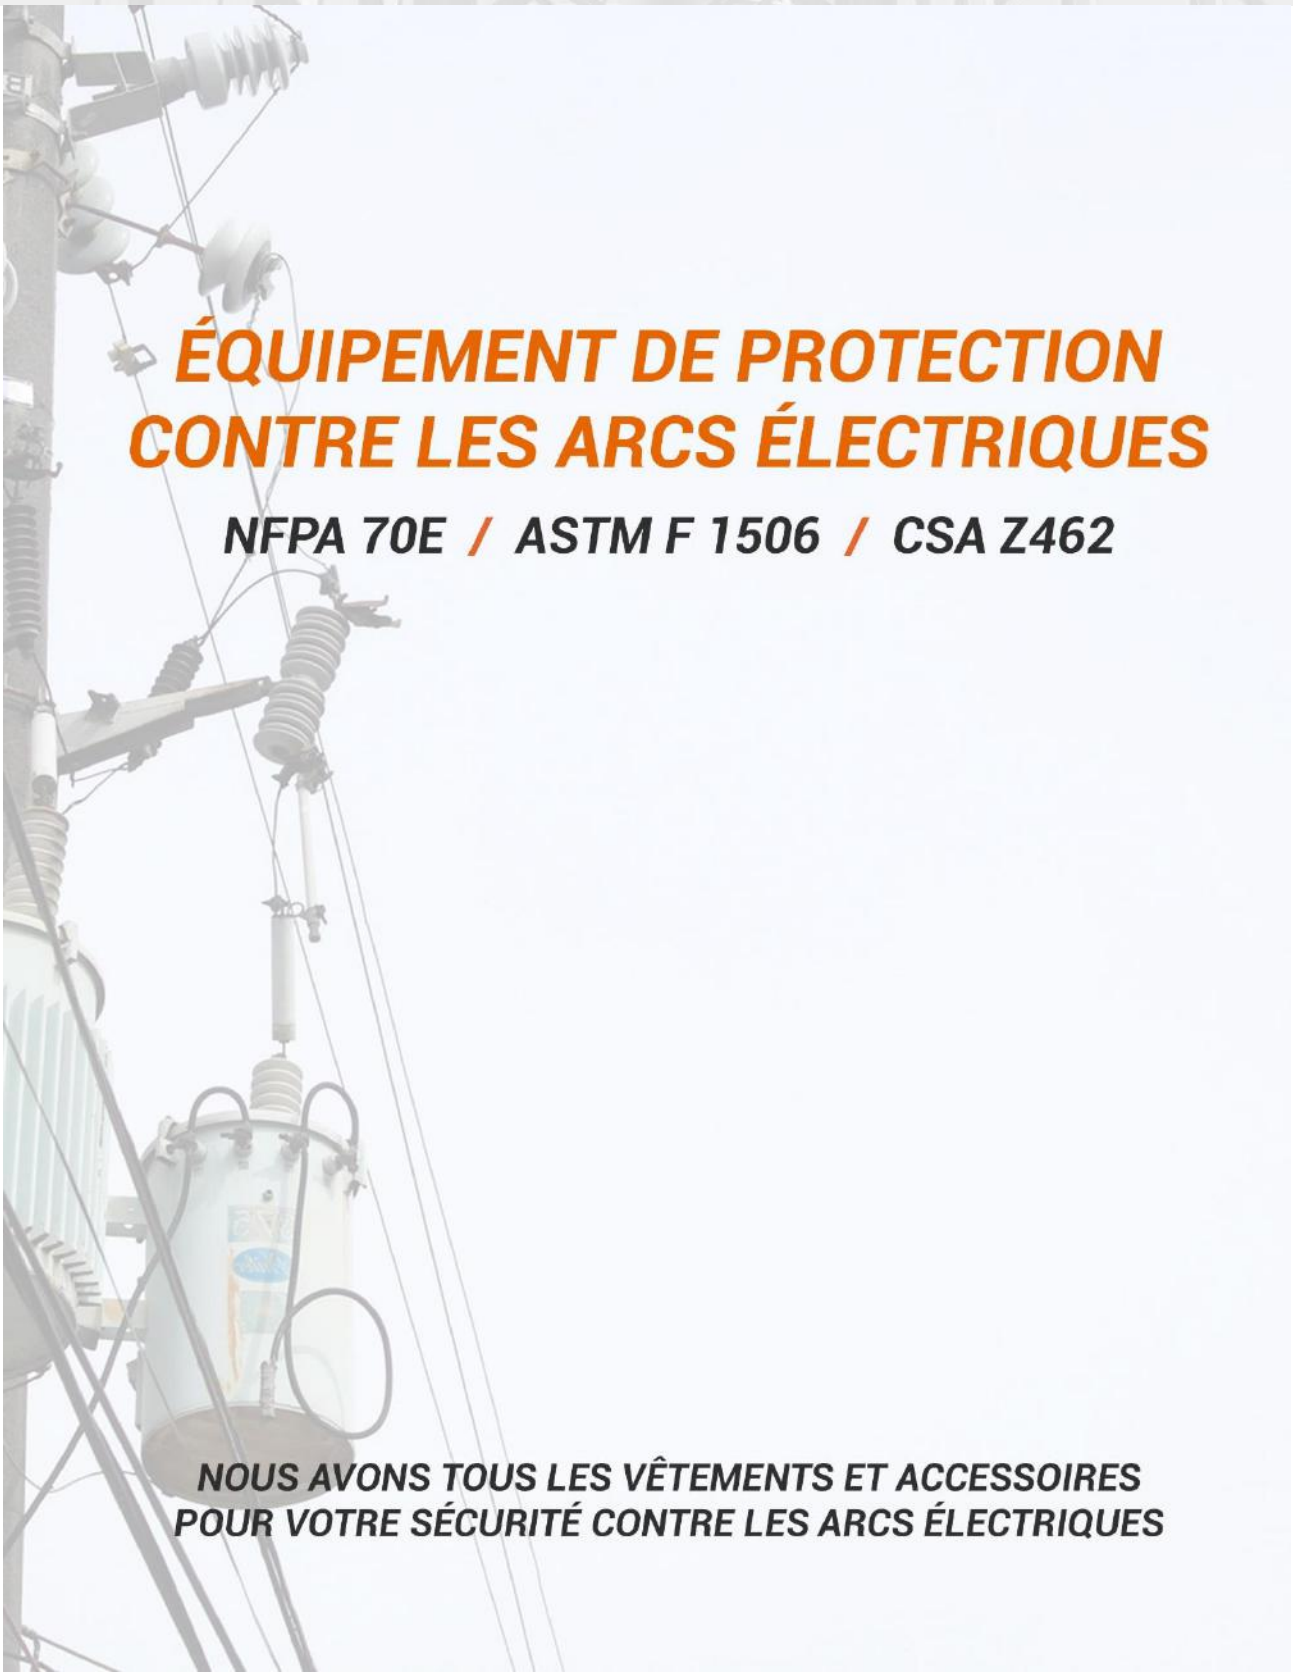

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

DE QUEL ÉQUIPEMENT AVEZ-VOUS BESOIN ?

À l'origine, un arc est généré par l'ionisation d'un gaz. Il s'agit d'une conductivité électrique entre des électrodes de potentiels différents, des phases différentes ou d'une phase à la terre. Un arc électrique peut être provoqué par une erreur technique ou, comme c'est souvent le cas, par une erreur humaine.

L'amélioration des connaissances des arcs électriques et les récentes normes de classement des textiles soumis à l'arc électrique ont créé un impact important pour la sécurité des travailleurs. La norme américaine CSA Z462 a tracé la voie dans ce domaine. Au Canada, la norme CSA Z462 est présentement en force depuis 2008.

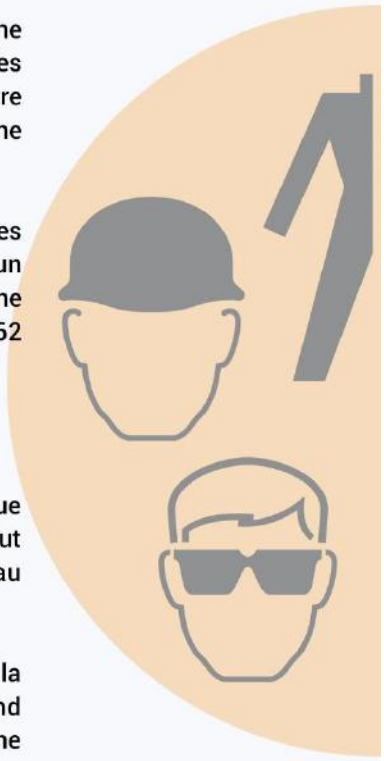

ATPV

L'ATPV (Arc thermal performance value ou Performance thermique à l'arc) mesure la chaleur humaine maximale (en cal/cm²) que peut supporter un matériel avant que ne surviennent des brûlures au second degré.

Une calorie mesure la quantité de chaleur requise pour élever la température d'une gamme d'eau de 1° C. La brûlure du second degré provient d'une exposition à 1.2 cal/cm² pendant une seconde. 1.2 cal/cm² équivaut à tenir son doigt dans la partie bleue de la flamme d'un briquet à butane pendant une seconde.

NOTES D'ENTRETIEN POUR E.P.I. (VÊTEMENTS IGNIFUGES)

- Eau froide ou tiède, pas plus chaude que 60° C.
- Aucun adoucissant lors du lavage et/ou du séchage.
- Aucun javellisant lors du lavage.
- Ne jamais mélanger ces vêtements avec les vêtements domestiques.
- Ne jamais trop sécher un vêtement de protection.
- Toute réparation se doit d'être réalisée à partir du même tissu ou cousue avec du fil Nomex®.
- Pour fin d'identification, un écusson doit être cousu avec du fil 100% coton, exigez-le. La plupart des écussons sont fait de polyester et/ou polyester/coton.
- Si l'alternative de broderie est choisie, exigez un fil de broderie Nomex®. Il y va du bien-être de vos collègues et ainsi éviter des blessures graves.

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

SAVIEZ-VOUS QUE...

- Chaque année, en Amérique du Nord, plus de 2000 personnes sont victimes de brûlures sur leur lieu de travail.
- La majorité des brûlures au troisième degré sont attribuables au fait que les vêtements des victimes s'enflamment et continuent de brûler, d'où la nécessité de bien se protéger.
- Les risques électriques sont de deux types: risques de chocs électriques et risques d'arcs électriques.
- La température d'un arc électrique peut dépasser celle de la surface du Soleil. L'énergie électrique se transforme en chaleur, en lumière et en onde de choc.

CLASSE DES GANTS (TENSION MAXIMALE)

CLASSE	ESSAI DE TENSION CA/CC	TENSION MAXIMALE CA/CC VOLTAGE DES GANTS
00	2500 / 10000	500 / 750
0	5000 / 20000	1000 / 1500
1	10000 / 40000	7500 / 11250
2	20000 / 50000	17000 / 25500
3	30000 / 60000	26500 / 39750
4	40000 / 70000	36000 / 54000

TABLEAU DES DISTANCES POUR LES GANTS DE CUIR SELON ASTM F496

CLASSE DE GANTS	DISTANCE MINIMUM ENTRE LE GANT DE CUIR ET DE CAOUTCHOUC	
00,0	0,5 po	13 mm
1	1 po	25 mm
2	2 po	51 mm
3	3 po	76 mm
4	4 po	102 mm

CARACTÉRISTIQUES DES VÊTEMENTS DE PROTECTION

CLASSIFICATION SELON L'ATPV NORME CSA Z462

NIVEAU 0	IGNIFUGEANT NON REQUIS
NIVEAU 1	8 cal/cm²
NIVEAU 2	12 cal/cm²
NIVEAU 3	25 cal/cm²
NIVEAU 4	40 CAL/CM2

MESURER LA CIRCONFÉRENCE DE VOTRE PAUME POUR DÉTERMINER LA TAILLE DU GANT À COMMANDER

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ENSEMBLES ARC-FLASH

ENSEMBLE COUVRE-TOUT 12 CALORIES

Couvre-tout	605-USN-(Grandeur)
Visière de protection	WV-CHN-10
Mentonnière	SW-CN-G
Support à visière	HB-2-CAP
Gants de caoutchouc	LRIG-0-11-(Grandeur)
Sac à gants	GB-15
Sac à équipement	909-ARC
ENSEMBLE COMPLET	C2K-12 (Grandeur veste) - (Grandeur gants)
CAGOULE ÉCONOMIQUE Confortable De protection **10** cal/cm²	KN-51-NFPA

*N'inclut pas le casque de sécurité

ENSEMBLE COUVRE-TOUT 40 CALORIES

Veste 35''	SWJ-40-(Grandeur)
Salopette	SWB-40-(Grandeur)
Cagoule à visière	SWH-40
Gants de caoutchouc (Classe 2)	LRIG-2-14-(Grandeur)
Gants de cuir	LLPG-12-(Grandeur)
Sac à gants	GB-15
Sac à équipement	909-ARC
ENSEMBLE COMPLET	L4K-40 (Grandeur veste) - (Grandeur gants)
CAGOULE AVEC VENTILATEUR	SWH40F

CHAUSSURE DE SÉCURITÉ
CODE: BB1500

BOTTE DE SÉCURITÉ
CODE: BB1500

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ENSEMBLES DE GANTS

CLASSE 0
1000 VOLTS

Gant classe 0	LRIG-0-11-(Grandeur)
Gants de cuir	PG-0-ADJS-(Grandeur)
Sac à gants	GB-15
Gants de coton	M00005XL
Ensemble complet	GK-0-11-(Grandeur)

CLASSE 2
17 000 VOLTS

Gant classe 2	LRIG-2-14-(Grandeur)
Gants de cuir	LRIG-2-12-(Grandeur)
Sac à gants	GB-15
Gants de coton	M00005XL
Ensemble complet	GK-2-14-(Grandeur)

DISPONIBLE DANS LES CLASSES 00-0-1-2-3 ET 4

Selon les normes ASTMF496 CAN-ULC-60903, les gants doivent être testés tous les 6 mois et les perches isolées à chaque année.

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ACCESSOIRES DE PROTECTION

CAGOULE DE PROTECTION

CAGOULE CARBON ULTIMATE
CODE **:** KCF-51

- Possède deux épaisseurs pour une protection maximum selon la norme CSA Z 462. Notre cagoule a des coutures à plat pour un confort supérieur.
- ***L'ATPV*** est de **23** cal/cm^2.
- Elle ne fond pas et est ignifuge.
- Grandeur universelle

CAGOULE ÉCONOMIQUE
CODE : KN-51-NFPA

- Confortable
- De protection **10** cal/cm^2.

BOUCHONS D'OREILLES RÉUTILISABLES FUSION

Préservez-vous des niveaux sonores élevés en milieux poussiéreux.

- Anneaux souples et doux : tenue parfaite.
- Bouchons ultraconfortables. Port prolongé favorisé par la forme conique.
- Cordelette détachable avec système unique antichute.
- Nettoyables au savon doux et à l'eau tiède.

Indice d'affaiblissement sonore : 28 dB
Norme EN : EN 352-2
Bouchon matériau : Flexifirm™

CASQUE ET VISIÈRE

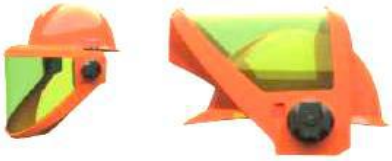

ENSEMBLE COMPLET SALISBURY
CODE : AS1200 HAT

12 cal/cm^2
Aussi disponible en **20** cal/cm^2

Visière 10 cal/cm^2	WV-ARC-12
Mentonnière	SW-CN-G
Support à visière	HB-2-CAP
Casque	E2RW-(Couleur)
Ensemble complet	SW-WVCK-(Couleur)

SAC DE RANGEMENT POUR VISIÈRE
CODE: SW-SB

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

VÊTEMENTS DE PROTECTION ARC-FLASH

COUVRE-TOUT ULTRASOFT

COUVRE-TOUT NON DOUBLÉ 7 OZ ULTRASOFT
CSA Z96

CODE : 1325US7

Évaluation d'arc :
- **8.7** cal/cm^2
- Catégorie 2

Bandes réfléchissantes*
Disponible en plusieurs couleurs

COUVRE-TOUT NON FLASHTRAP 7 OZ ULTRASOFT
CSA Z96

CODE : 1155US7

Évaluation d'arc :
- **8.7** cal/cm^2
- Catégorie 2

Bandes réfléchissantes*
Disponible en plusieurs couleurs

*Cette disposition de bandes Scotchlite™ remplit les critères CSA Z96 Classe 1/Niveau 1 FR.

Pour plus d'information, consultez le catalogue Big Bill.

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LONGE ET HARNAIS ANTI-CHUTE

CLASSIFICATIONS DES APPLICATIONS POUR HARNAIS

Les harnais sont disponibles pour une grande variété d'applications selon les pictogrammes et les définitions ci-dessous:

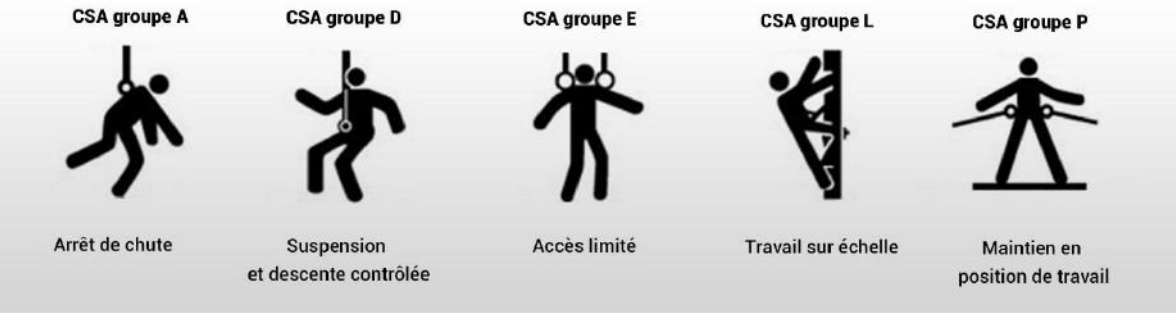

PROTECTION ANTI-CHUTE

FPT07DS

FP1056133/6

FP635133/4

FP63213/6

FP105311/6

FPRESCLAD

FPT07DS

FPT07DS

FPT07DS

FPT07DS

FP09D

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

FANION

Flags

Features

- Fits onto a 1/4" to 3/8" diameter rod or signaling rope
- HC-10063 uses a Velcro-strip fastening system
- HC-10064 fits on 1/4" to 3/8" diameter or signaling rope

Material

Vinyl

Catalog Number	A	B	C	Color	Weight Ea (lbs)
HC-10063-R	12	12		Red	
HC-10063-V	12	12		Green	
HC-10064-R	6	6		Red	
HC-10064-V	6	6		Green	
HC-10047-R	15	2 5/8	4 5/16	Red	0.6
HC-10047-V	15	2 5/8	4 5/16	Green	0.6
HC-10047	15	2 5/8	4 5/16		0.6
HC-10047-A	4 3/4	2 5/8	4 5/16		0.6

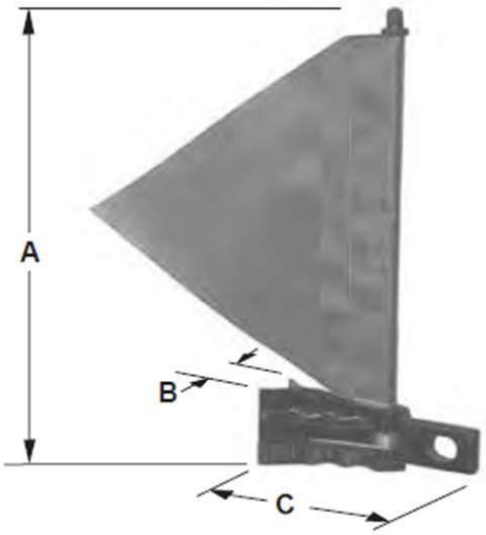

Flags

Features

- For installation on any steel surface
- Corrosion resistant magnet
- Installation eye for installation with shotgun stick

Material

Base: Steel with polyurethane coating
Rod: Fiberglass

Catalog Number	A	B	C	Color	Weight Ea (lbs)
HC-10046-R	15 1/2	3	4 5/16	Red	1.6
HC-10046-V	15 1/2	3	4 5/16	Green	1.6
HC-10046	15 1/2	3	4 5/16		1.6

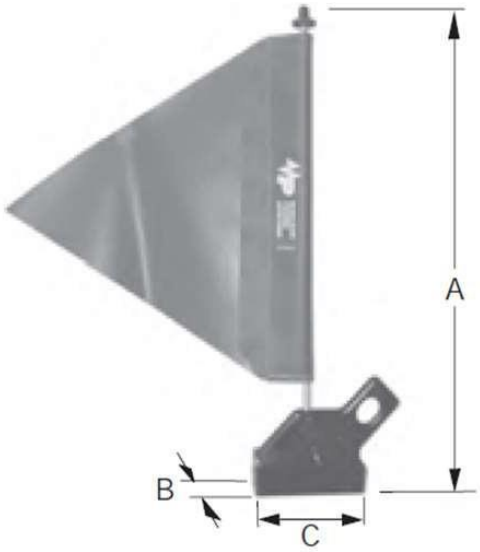

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

RUBAN ET DÉVIDOIR

Posts and Cones

Features

- Used to hold different types of markers such as warning tape, a rope, a display or a warning flag to mark a working area

Material

Rod:	Fiberglass
Head and Feet:	Polyurethane

Catalog Number	A	B	C	Weight Ea (lbs)
[illegible]				
HC-10137	3 1/2	17 1/4	5	0.8

Reels and Tape

Features

- Holds 2" wide warning tape
- Unique mechanism prevents fraying of tape
- Locking Handle
- Sturdy plastic hook used to attach to end of pole or any other structure
- Optional aluminum base for a secure installation
- Reel installs paridly with a wing nut

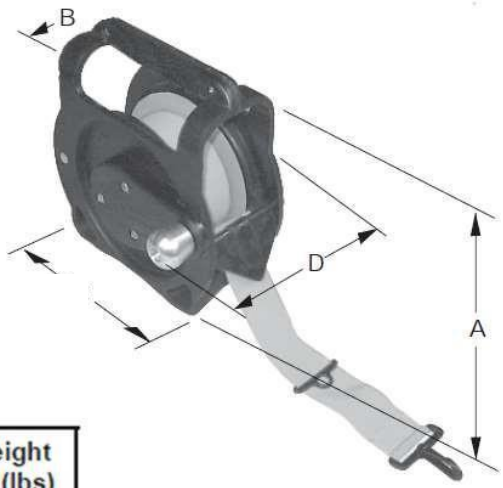

Material

Enclosure:	Polyurethane
Tape:	Vinyl
Handle:	Aluminum
Hardware:	Stainless steel
Optional Base:	1/4" thick 0601T6 aluminum

Catalog Number	A	B	C	D	Weight Ea (lbs)
HC-10134	9 3/4	3 3/4	9	5 1/2	3.1

Catalog Number	A	B	C	D	Color	Length of Tape	Weight Ea (lbs)
HC-10135	9 3/4	3 3/4	9	5 1/2	Red	100	4.4
HC-10135-150	9 3/4	3 3/4	9	5 1/2	Red	150	5.0

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

ÉCARTEUR ET FLÉCHETTE

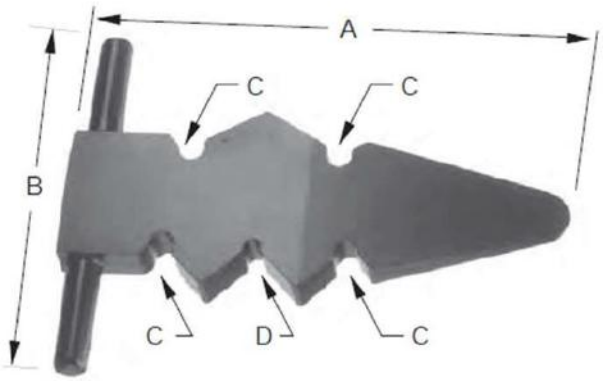

Spreaders

Features

- Used to seperate triplex and quadruplex conductors for easy skinning of conductors and installation of connectors
- Handle reinforced with fibergrlass rod

Material

Body: Polyurethane
Handle: Fiberglass

Catalog Number	A	B	Radius		Thickness (in)	Weight Ea (lbs)
			C	D		
01-P-026	14 3/4	11	3/8	1/4	1 13/32	2.8

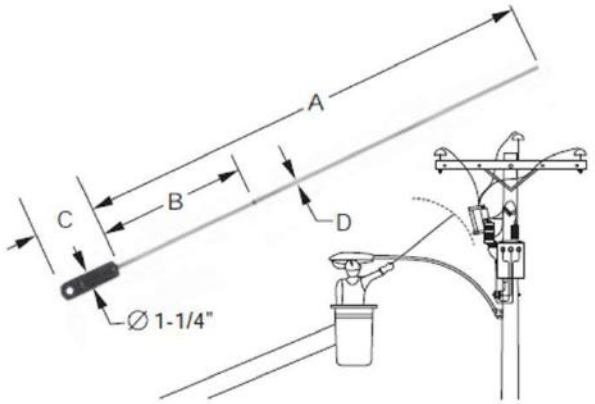

Insulated Sticks & Accessories

Features

- Used to ascertain approach limit to line component
- Installation eye for use with shotgun stick

Material

Rod: Fiberglass
Handle: Polyurethane

Catalog Number	A	B	C	D	Weight Ea (lbs)
01-PM-044	24	12	4 1/2	0.362	0.3
01-P-072-36	36				0.4
01-P-072-48	48				0.5

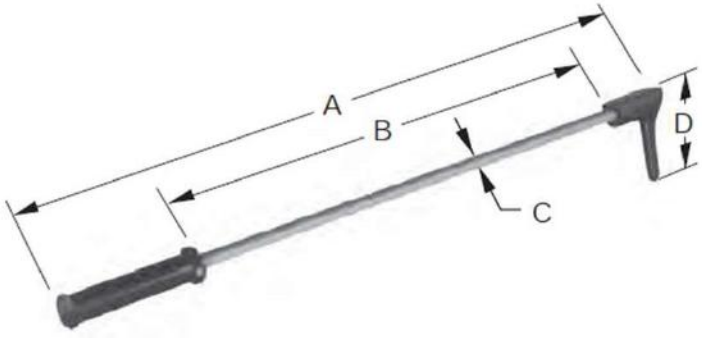

Insulated Sticks & Accessories

Features

- Used to open and close conductor holder

Material

Tube: Fiberglass filled with polyurethane foam
Hook and handle: Polyurethane

Catalog Number	A	B	C	D	Weight Ea (lbs)
01-P-002	40	26	5/8	4 7/8	0.9

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

PANNEAU À OUTILS POUR NACELLE

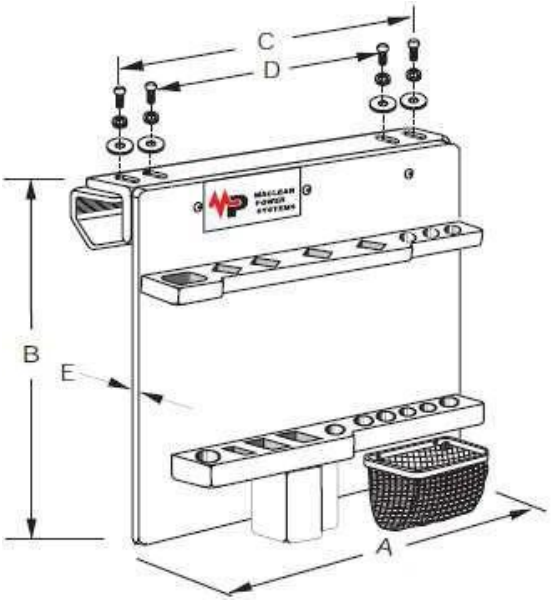

Tool Board

Features

- For mounting on buckets with or without liner
- Can hold up to 13 tools and pouch can accomodate a variety of nuts, bolts, and drill bits
- Fixed installation ensures stabaility in bucket
- Polyurethane grooves permit an excellent tool retaining force and an easy retrieval

Material

Board:	Grey painted fiberglass
Racks:	Black polyurethane
Pouch:	Nylon
Hardware:	Stainless steal

Catalog Number	A	B	C	D	E	Weight Ea (lbs)
01-P-001	18	21	16 1/2	12 1/2	3/16	10

ŒIL DE TIRAGE

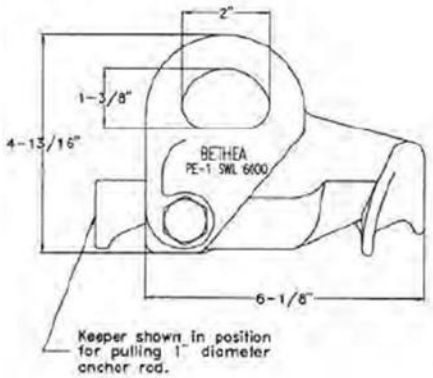

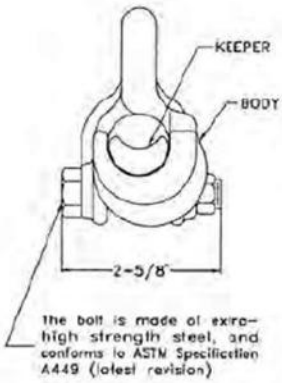

Anchor Rod Pulling Eye

Material

Ductile iron yellow epoxy paint finish

Catalog Number	Safe Working Load (lbs)	Ultimate Working Load	Weight Ea (lbs)
PE-1	6000	30000	5

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

PROTECTEUR DE LIGNE ET CAPOT D'ISOLATEUR 15 / 25 kV (RIGIDE – ABS)

12936

ENTREPOSAGE PROTECTEUR DE LIGNE

PROTECTEUR DE LIGNE

NUMÉRO	DESCRIPTION
12936	15 / 25 kV Protecteur de Ligne 4' 6'' avec anneau pour perche

12528

12527

01-484

CAPOT D'ISOLATEUR

NUMÉRO	DESCRIPTION
12528	15 / 25 kV Capot d'isolateur pour tige simple
12527	15 / 25 kV Capot d'isolateur pour tige double
01-484	Sac d'entreposage pour protecteur de ligne Les sacs tiennent deux protecteurs

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PROTECTEUR DE LIGNE ET CAPOT D'ISOLATEUR (suite)
35 kV (RIGIDE – ABS)

6010

PROTECTEUR DE LIGNE

NUMÉRO	DESCRIPTION
6010	35 Kv Protecteur de Ligne 4' 6'' avec anneau pour perche
6011	35 kV Protecteur de Ligne 4' 6'' avec une perche d'installation de 4 pi.

9144

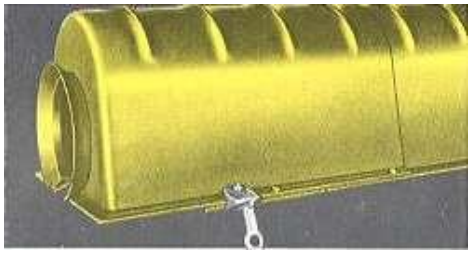

9770

CAPOT D'ISOLATEUR

NUMÉRO	DESCRIPTION
9144*	35 kV Capot pour tige simple Longueur : 22''
9770*	35 kV Capot pour tige double Ajustable en 3 longueurs : 27'', 32'' et 37''

*Niveau de tension :
35 kV si utilisé avec protecteur 6010 ou 6011
46 kV si utilisé avec protecteur 6012 ou 6013
69 kV si utilisé avec protecteur 12000 ou 12001

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PROTECTEUR DE LIGNE RIGIDE
46 / 69 kV (ABS)

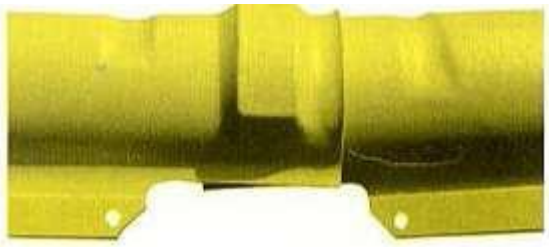

PROTECTEUR DE LIGNE

NUMÉRO	DESCRIPTION
6012	46 kV Protecteur de Ligne 4' 6'' avec anneau pour perche
6013	46 kV Protecteur de Ligne 4' 6'' avec une perche d'installation de 4 pi.
12000	69 kV Protecteur de Ligne 4' 6'' avec anneau pour perche
12001	69 kV Protecteur de Ligne 4' 6'' avec une perche d'installation de 6 pi.

Note : Les protecteurs montrés ci-dessus peuvent être utilisés avec les capots d'isolateur No. 9144 et 9770 avec un isolateur jusqu'à 9'' de diamètre.

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PROTECTEUR DE TRAVERSE ET POTEAU

PROTECTEUR DE TRAVERSE

NUMÉRO	DESCRIPTION
12012	Protecteur de traverse avec fentes latérales et anneau pour perche

PROTECTEUR DE POTEAU

NUMÉRO	DESCRIPTION
11923	Protecteur de poteau 1 pi. Pour poteau de 6'' à 12'' de diamètre
11924	Protecteur de poteau 2 pi. Pour poteau de 6'' à 12'' de diamètre
11925	Protecteur de poteau 3 pi. Pour poteau de 6'' à 12'' de diamètre
11926	Protecteur de poteau 4 pi. Pour poteau de 6'' à 12'' de diamètre
11927	Protecteur de poteau 6 pi. Pour poteau de 6'' à 12'' de diamètre

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PROTECTEUR DE LIGNE SOUPLE
15 kV (POLYÉTHYLÈNE)

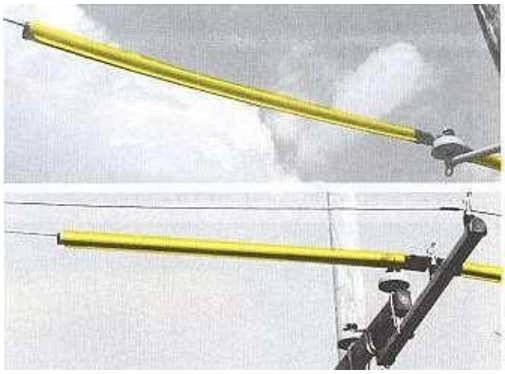

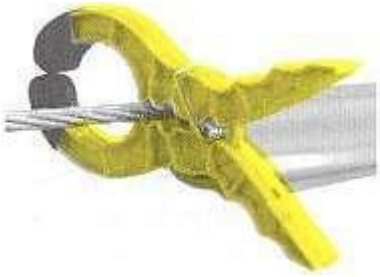

A30321

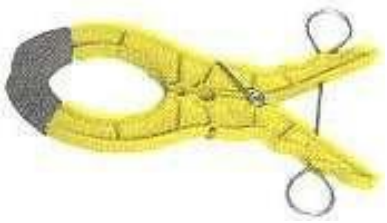

A30322

PROTECTEUR DE LIGNE – (15 kV PHASE-PHASE)

NUMÉRO	DESCRIPTION	DIMENSIONS
6060	Protecteur de ligne polyéthylène 6 pieds	6' x 1.77'' I.D.
6050	Protecteur de ligne polyéthylène 5 pieds	5' x 1.77'' I.D.
A30321	Pince sur conducteur	9.5'' x 5'' Mâchoire
A30322	Pince sur conducteur avec œillet pour perche	9.5'' x 5'' Mâchoire

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PROTECTEUR DE LIGNE SOUPLE (suite)
25 kV (POLYÉTHYLÈNE)
CLASSE 3

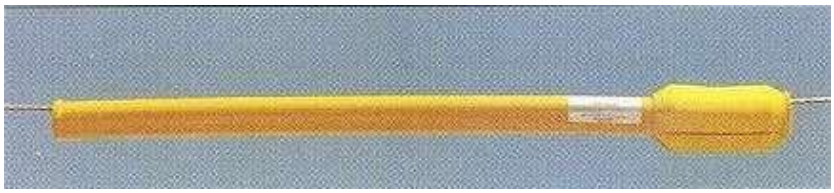

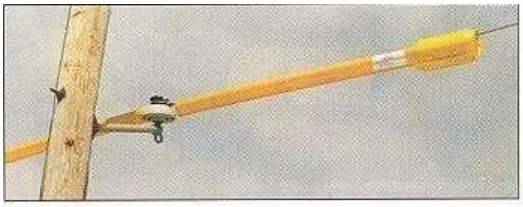

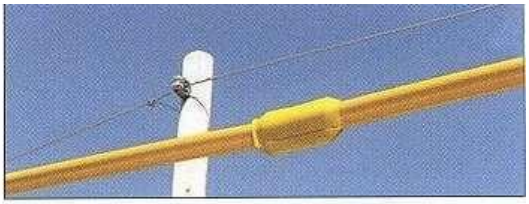

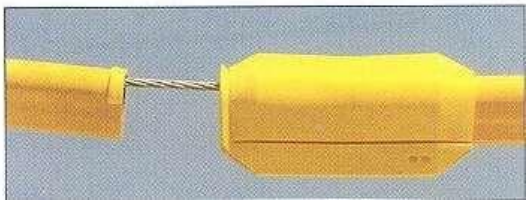

PROTECTEUR DE LIGNE – (25 kV PHASE-PHASE)

NUMÉRO	DESCRIPTION	DIMENSIONS
6065	Protecteur de ligne polyéthylène 6 pieds	6′ x 1.77′′ I.D.
6055	Protecteur de ligne polyéthylène 5 pieds	5′ x 1.77′′ I.D.

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

COUVERTURE ISOLANTE
CLASSE 2 ET CLASSE 4

COUVERTURE ISOLANTE

TYPE I CAOUTCHOUC NATUREL
TYPE II CAOUTCHOUC SYNTHÉTIQUE RÉSISTANT À L'OZONE

NUMÉRO	DESCRIPTION	DIMENSIONS	ASTM CLASSE	TYPE
6020	Couverture de caoutchouc	36'' x 36''	CL 2	I
6040	Couverture de caoutchouc	36'' x 36''	CL 4	II
6020-22	Couverture de caoutchouc	22'' x 22''	CL 2	I
6040-22	Couverture de caoutchouc	22'' x 22''	CL 4	II

COUVERTURE ISOLANTE FENDUE

TYPE I CAOUTCHOUC NATUREL
TYPE II CAOUTCHOUC SYNTHÉTIQUE RÉSISTANT À L'OZONE

NUMÉRO	DESCRIPTION	DIMENSIONS	ASTM CLASSE	TYPE
6020-1	Couverture de caoutchouc	36'' x 36''	CL 2	I
6040-1	Couverture de caoutchouc	36'' x 36''	CL 4	II

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ACCESSOIRES DE COUVERTURE ISOLANTE

6023 / 6026

01-070 / 01-071

Contient 3 couvertures

01-603

01-604

NUMÉRO	DESCRIPTION	DIMENSIONS
6023	Tube de rangement Contient 3 couvertures	7'' x 37''
6026	Tube de rangement Contient 6 couvertures	9'' x 37''
01-070	Couverture de rangement	22'' x 22''
01-071	Couverture de rangement	36'' x 36''
01-603	Étui vinyle avec poignée pour rangement plat Contient 6 couvertures 22''	
01-604	Sac de rangement en tissu	

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

TOILE ISOLANTE ET ACCESSOIRES

TOILE ISOLANTE (USAGE UNIQUE)
PVC

NUMÉRO	DESCRIPTION
PVC136-50	Toile, 50' x 48'' largeur
PVC136-FB	Boîte de rangement

Toile isolante conçue pour usage unique.
Possède une isolation de 10 kV et répond aux normes ASTM en vigueur.

TOILE ISOLANTE CLASSE 0 1000 VOLTS

NUMÉRO	ASTM CLASSE	TYPE	GRANDEUR	COULEUR	VOLTAGE
LIM-RLB0	0	II	3' x 30'	Jaune	1000

***Modèle LIM-RBL0 disponible au pied linéaire**

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

TOILE ISOLANTE ET ACCESSOIRES (suite)

T160-14 / T160-30

01-P-062-1.9

HC-10335

A30321 / A30322

PINCE ET ATTACHE POUR TOILE

NUMÉRO	DESCRIPTION	DIMENSIONS
T160-14	Courroie	14''
T160-30	Courroie	30''
01-P-062-1.9	Pince polyuréthane	7-1/4''
HC-10335	Serre polyuréthane	7-1/4''
A30321	Pince pour couverture	Modèle régulier
A30322	Pince pour couverture	Modèle conçu pour perche

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PERCHE TÉLESCOPIQUE TRIANGULAIRE « NO TWIST »

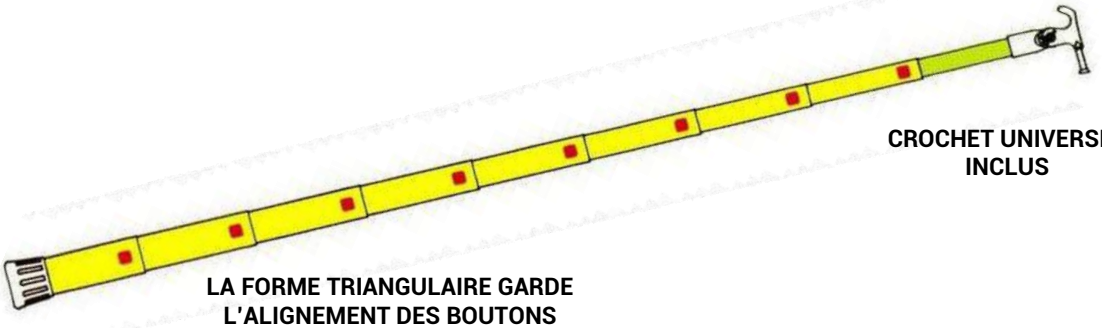

CROCHET UNIVERSEL INCLUS

LA FORME TRIANGULAIRE GARDE L'ALIGNEMENT DES BOUTONS



VUE DU BOUT MONTRANT LA FORME TRIANGULAIRE

BOUTON VUE DU DESSOUS

BOUTON VUE DE CÔTÉ

NUMÉRO	LONGUEUR EN PLEINE EXTENSION	LONGUEUR RÉTRACTÉE	BASE (DIA.)	NUMÉRO ÉTUI DE RANGEMENT
HV-208	8' (2.43 m)	26'' (.67 m)	1.75''	C-208
HV-212	12'7'' (3.8 m)	58'' (1.48 m)	1.45''	C-30
HV-216	16'9'' (5.0 m)	60'' (1.53 m)	1.61''	C-30
HV-220	21' (6.43 m)	62'' (1.58 m)	1.75''	C-30
HV-225	25'6'' (7.8 m)	64'' (1.63 m)	1.91''	C-40
HV-230	30' (9.21 m)	66'' (1.68 m)	2.07''	C-40
HV-235	35' (10.6 m)	68'' (1.72 m)	2.22''	C-40
HV-240	39'6'' (12.0 m)	69'' (1.75 m)	2.38''	C-40

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PERCHE TÉLESCOPIQUE RONDE

PERCHE TÉLESCOPIQUE RONDE STANDARD

NUMÉRO	LONGUEUR EN PLEINE EXTENSION	LONGUEUR RÉTRACTÉE	DIAMÈTRE DE LA BASE	DIAMÈTRE DE LA SECTION DU HAUT
	La perche peut être bloquée à chaque longueur listée			
S-212	12'	44''	1-5/8''	7/8''
S-216	12'4''	56''	1-5/8''	7/8''
S-220	17'- 20'	58''	1-7/8'''	7/8''
S-225	17'-21'- 25.5'	60''	2-3/16''	7/8''
S-230	17'-21.5'-26'-30'	61 5/8''	2-3/8''	7/8''
S-235	17'-21.5'-26'-30'-35'	63 3/8''	2-11/16''	7/8''
S-240	22'-26'-30'-35'-40'	65 3/8''	2-7/8''	7/8''

PERCHE TÉLESCOPIQUE RONDE (SECTION DU HAUT QUI VERROUILLE RÉTRACTÉE)

NUMÉRO	LONGUEUR EN PLEINE EXTENSION	LONGUEUR RÉTRACTÉE	DIAMÈTRE DE LA BASE	DIAMÈTRE DE LA SECTION DU HAUT	
	La perche peut être bloquée à chaque longueur listée			EN EXTENSION	RÉTRACTÉE
ST-216	12'4''- 16'	56''	1-5/8''	7/8''	1-3/32''
ST-220	17'- 20'	58''	1-7/8'''	7/8''	1-3/32''
ST-225	17'-21'- 25.5'	60''	2-3/16''	7/8''	1-3/32''
ST-230	17'-21.5'-26'-30'	61 5/8''	2-3/8''	7/8''	1-3/32''
ST-235	17'-21.5'-26'-30'-35'	63 3/8''	2-11/16''	7/8''	1-3/32''
ST-240	22'-26'-30'-35'-40'	65 3/8''	2-7/8''	7/8''	1-3/32''

PERCHE TÉLESCOPIQUE RONDE ROBUSTE (CHAQUE SECTION VERROUILLE DANS LA PRÉCÉDENTE)

NUMÉRO	LONGUEUR EN PLEINE EXTENSION	LONGUEUR RÉTRACTÉE	DIAMÈTRE DE LA BASE	DIAMÈTRE DE LA SECTION DU HAUT
	La perche peut être bloquée à chaque longueur listée			
SH-212	12'	44''	1-5/8''	1-3/32''
SH-216	9'-13'-17'	58-1/8''	1-7/8'''	1-3/32''
SH-200	13'-17.5'- 21.5'	60''	2-3/16''	1-3/32''
SH-250	13'-17.5'-21.5'-26'	61 5/8''	2-3/8''	1-3/32''
SH-230	13'-17.5'-21.5'-26'-30'	63 3/8''	2-11/16''	1-3/32''

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

PERCHE TÉLESCOPIQUE RONDE (suite)

PERCHE RONDE COMPACTE

NUMÉRO	LONGUEUR
839-2	Extension de 56'' seulement

ÉTUI DE TRANSPORT

NUMÉRO	POUR MODÈLE DE PERCHE
C-208	HV-208
C-212	S-212
C-30	S-216, S-220, S-225, S-230, ST-216, ST-220, ST-225, ST-230, SH-216, SH-200, SH-250, HV-212 à HV-220
C-35	S-235, ST-235, SH-212, SH-230
C-8104	1617

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

PERCHE TÉLESCOPIQUE GRADUÉE

PERCHE GRADUÉE

NUMÉRO	LONGUEUR EN PLEINE EXTENSION	LONGUEUR RÉTRACTÉE	ÉTUI DE TRANSPORT
IMPÉRIAL			
E-25	25′	65 ¾′′	C-35
E-30	30′	65 ¾′′	C-35
E-35	35′	65 ¾′′	C-35
E-40	40′	65 ¾′′	C-35
E-50	50′	69 3/16′′	C-40
MÉTRIQUE			
M-25	7.5 m	1.67	C-35
M-35	10.5 m	1.67	C-35
M-40	12 m	1.67	C-35
M-50	15 m	1.76	C-40

PERCHE POUR CAMIONNAGE			
E-15-1	15′	67 ½′′	C-40

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

PERCHE DE MESURAGE

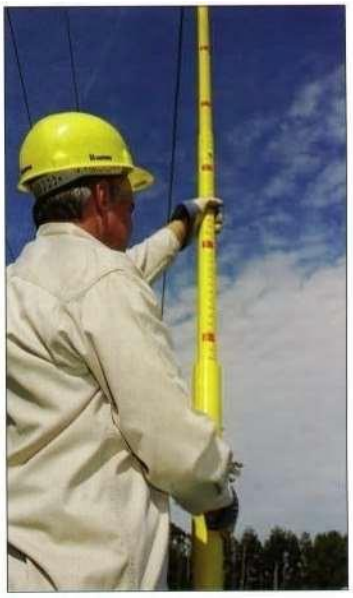

NUMÉRO	LONGUEUR EN PLEINE EXTENSION	LONGUEUR RÉTRACTÉE	DIAMÈTRE DE LA BASE	DIAMÈTRE DE LA SECTION DU HAUT	BOÎTIER DE TRANSPORT
EV-25	25' 6''	64''	1.91''	1.15''	C-40
EV-30	30'	66''	2.07''	1.15''	C-40
EV-35	35'	68''	2.22''	1.15''	C-40
EV-40	39' 6''	69''	2.38''	1.15''	C-40
MV-25	7.8 m	1.63 m	4.85 cm	2.9 cm	C-40
MV-30	9.2 m	1.68 m	5.25 cm	2.9 cm	C-40
MV-35	10.6 m	1.72 m	5.6 cm	2.9 cm	C-40
MV-40	12 m	1.75 m	6.04 cm	2.9 cm	C-40

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PERCHE FIXE ISOLÉE

TÊTE SECTIONNEUR

TÊTE INTERRUPTEUR

DIAMÈTRE DE LA PERCHE 1 ¼''

NUMÉRO	LONGUEUR	POIDS
TÊTE SECTIONNEUR		
460-4	1 ¼'' x 4'	1 lbs 9 oz
460-6	1 ¼'' x 6'	2 lbs 5 oz
460-8	1 ¼'' x 8'	3 lbs
460-10	1 ¼'' x 10'	3 lbs 4 oz
460-12	1 ¼'' x 12'	3 lbs 9 oz
P10036	Tête seulement	7 oz
TÊTE INTERRUPTEUR		
461-4	1 ¼'' x 4'	1 lbs 11 oz
461-6	1 ¼'' x 6'	2 lbs 7 oz
461-8	1 ¼'' x 8'	3 lbs 10 oz
461-10	1 ¼'' x 10'	4 lbs 13 oz
461-12	1 ¼'' x 12'	6 lbs 8 oz
P10037	Tête seulement	9 oz

DIAMÈTRE DE LA PERCHE 1 ½''

NUMÉRO	LONGUEUR	POIDS
TÊTE SECTIONNEUR		
462-6	1 ½ '' x 6'	2 lbs 13 oz
462-8	1 ½ '' x 8'	3 lbs 10 oz
462-10	1 ½ '' x 10'	4 lbs 13 oz
462-12	1 ½ '' x 12'	6 lbs 8 oz
462-14	1 ½ '' x 14'	7 lbs 5 oz
462-16	1 ½ '' x 16'	8 lbs 4 oz
462-18	1 ½ '' x 18'	9 lbs 2 oz
462-20	1 ½ '' x 20'	10 lbs 1 oz
TÊTE INTERRUPTEUR		
541-6	1 ½ '' x 6'	2 lbs 13 oz
541-8	1 ½ '' x 8'	3 lbs 10 oz
541-10	1 ½ '' x 10'	4 lbs 13 oz
541-12	1 ½ '' x 12'	6 lbs 8 oz
541-14	1 ½ '' x 14'	7 lbs 5 oz
541-16	1 ½ '' x 16'	8 lbs 4 oz
541-18	1 ½ '' x 18'	9 lbs 2 oz
541-20	1 ½ '' x 20'	10 lbs 1 oz
P10038	Tête seulement	13 oz

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PERCHE FIXE ISOLÉE (suite)

TÊTE ISOLÉE

TÊTE UNIVERSELLE

DIAMÈTRE DE LA PERCHE 1 ¼''

NUMÉRO	LONGUEUR	POIDS
TÊTE ISOLÉE		
501-4	1 ¼'' x 4'	1 lb 4 oz
501-6	1 ¼'' x 6'	2 lbs 3 oz
501-8	1 ¼'' x 8'	2 lbs 10 oz
501-10	1 ¼'' x 10'	3 lbs 8 oz
501-12	1 ¼'' x 12'	4 lbs 5 oz
TÊTE UNIVERSELLE		
567-4	1 ¼'' x 4'	1 lb 7 oz
567-6	1 ¼'' x 6'	1 lb 12 oz
567-8	1 ¼'' x 8'	2 lbs 11 oz
567-10	1 ¼'' x 10'	3 lbs 6 oz
567-12	1 ¼'' x 12'	4 lbs 1 oz

DIAMÈTRE DE LA PERCHE 1 ½''

NUMÉRO	LONGUEUR	POIDS
TÊTE ISOLÉE		
502-6	1 ½'' x 6'	2 lbs 5 oz
502-8	1 ½'' x 8'	3 lbs 3 oz
502-10	1 ½'' x 10'	4 lbs 6 oz
502-12	1 ½'' x 12'	5 lbs 4 oz
502-14	1 ½'' x 14'	6 lbs 4 oz
502-16	1 ½'' x 16'	7 lbs 3 oz
502-18	1 ½'' x 18'	8 lbs 2 oz
TÊTE UNIVERSELLE		
469-10	1 ½'' x 10'	4 lbs 9 oz
469-12	1 ½'' x 12'	6 lbs 9 oz
469-14	1 ½'' x 14'	7 lbs 6 oz
469-16	1 ½'' x 16'	8 lbs 5 oz
469-18	1 ½'' x 18'	9 lbs 4 oz
469-20	1 ½'' x 20'	10 lbs 2 oz

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PERCHE DE MANUTENTION

LONGUEUR FIXE AVEC TIGE D'OPÉRATION EXTÉRIEURE

SHOTGUN STICK

POMPE C/A TIGE EXTÉRIEURE			COFFRET DE TRANSPORT À COURROIE	
NUMÉRO	LONGUEUR	POIDS	NUMÉRO	POIDS
8104	4' 6''	4.5 lbs	C-8104	0.7 lbs
8106	6' 6''	5.2 lbs	C-8106	1 lbs
8108	8' 6''	6.5 lbs	C-8108	1.3 lbs
8110	10' 6''	7.2 lbs	C-8110	1.6 lbs
8112	12' 6''	7.8 lbs	C-8112	1.9 lbs

LONGUEUR FIXE AVEC TIGE D'OPÉRATION INTÉRIEURE

SHOTGUN STICK

POMPE C/A TIGE EXTÉRIEURE			COFFRET DE TRANSPORT À COURROIE	
NUMÉRO	LONGUEUR	POIDS	NUMÉRO	POIDS
8204	4' 6''	4.1lbs	C-8104	0.7 lbs
8206	6' 6''	4.9 lbs	C-8106	1 lbs
8208	8' 6''	5.7 lbs	C-8108	1.3 lbs
8210	10' 6''	6.4 lbs	C-8110	1.6 lbs
8212	12' 6''	7.1 lbs	C-8112	1.9 lbs

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PERCHE DE MANUTENTION SECTIONNELLE

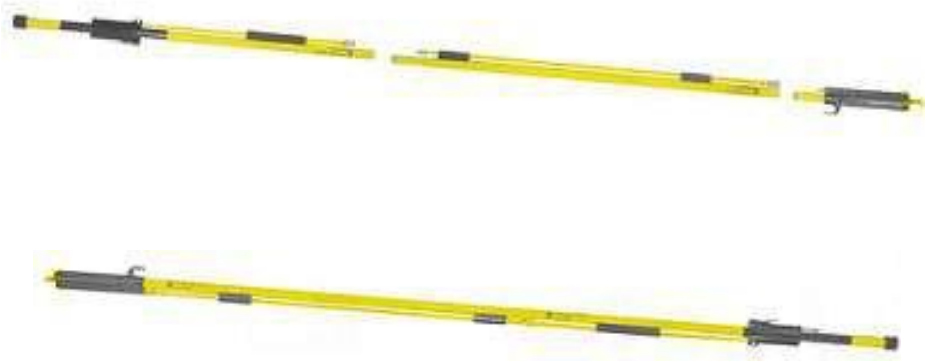

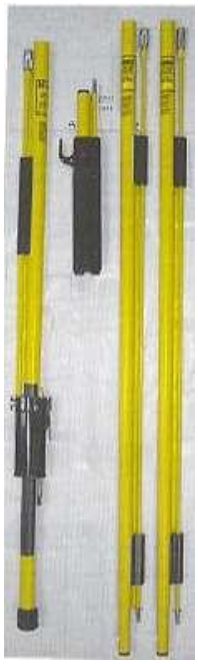

NUMÉRO	LONGUEUR DES SECTIONS	NOMBRE DE SECTIONS DANS L'ENSEMBLE	LONGUEUR D'OPÉRATION
81-524	4 pieds	2	5',9'
81-534	4 pieds	3	5',9',13'
81-544	4 pieds	4	5',9',13',17'
81-526	6 pieds	2	7',13'
81-536	6 pieds	3	7',13',19'
81-546	6 pieds	4	7',13',19',25'

L'ensemble de perche sectionnelle comprend la base, des sections intermédiaires et un étui de transport.

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

ACCESSOIRES POUR L'ÉMONDAGE

PERCHE À SCIE POUR L'ÉMONDAGE

NUMÉRO	GRANDEUR	POIDS
4050	1 ¼'' dia. x 10'	4 ¼ lbs
4051	1 ¼'' dia. x 12'	5.0 lbs
4052	1 ¼'' dia. x 14'	4 ¾ lbs
4053	1 ¼'' dia. x 16'	5 ½ lbs

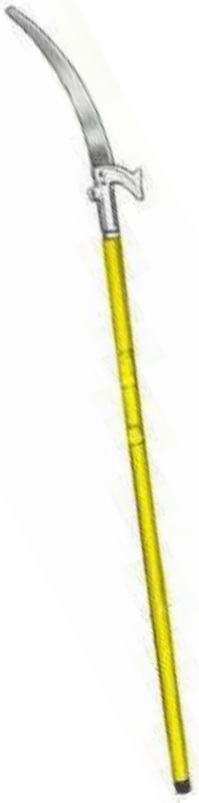

ÉTUI PROTECTEUR POUR LAME

NUMÉRO
A30007

LAME DE REMPLACEMENT

NUMÉRO
P11004

SÉCATEUR D'ARBRE UNIVERSEL

NUMÉRO
10-019

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

AUTRES ACCESSOIRES POUR PERCHES

TÊTE DE DÉBRANCHEMENT
P10041

ADAPTATEUR UNIVERSEL POUR PERCHE À POMPE
A10019

DENT DE DISJONCTEUR UNIVERSELLE

CROCHET DE DÉBRANCHEMENT UNIVERSEL
P10431 / FLUOA10400e

CROCHET « S » UNIVERSEL
P10046

PINCE ÉTAU UNIVERSELLE
5455-99 ou 5455-98

PINCE UNIVERSELLE
5455-25

TÊTE UNIVERSELLE
A10017 ou A10018

DENT UNIVERSELLE DE DÉBRANCHEMENT
P10049

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PLATEAUX D'OUTILS POUR NACELLE

PLATEAU D'OUTILS PROFOND EN FIBRE DE VERRE

NUMÉRO	PROFONDEUR	LARGEUR	LONGUEUR	POIDS
05-919-1	24''	6 ½''	17''	17 lbs

PLATEAU D'OUTILS EXTÉRIEUR COMPACT

NUMÉRO	PROFONDEUR	LARGEUR	LONGUEUR	POIDS
05-951	7 ½ ''	6''	14''	8 lbs
05-955	7 ½ ''	6''	20''	10 lbs

PLATEAU D'OUTILS EN FIBRE DE VERRE

NUMÉRO	PROFONDEUR	LARGEUR	LONGUEUR	POIDS
05-929-1	6''	8''	20''	8 lbs

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

POULIE DE LIGNE MANUELLE

3550

3551

3553

3554

3551-1

NUMÉRO	POIDS	DESCRIPTION
3550	1 ¾ lbs	Poulie pivotante, ouverture de côté, C/A crochet de sécurité.
3551	1 ¾ lbs	Poulie, ouverture de côté, C/A crochet crochet de sécurité.
3553	1 ¼ lbs	Poulie pivotante, ouverture de côté. (Anneau seulement)
3554	1 ¼ lbs	Poulie, ouverture de côté.(Anneau seulement)
3550-1	1 ¾ lbs	Poulie pivotante, ouverture de côté. (Crochet seulement)
3551-1	1 ¾ lbs	Poulie, ouverture de côté. (Crochet seulement)
10-147	1 lbs	Crochet pour poulie

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

POULIE DE TIRAGE

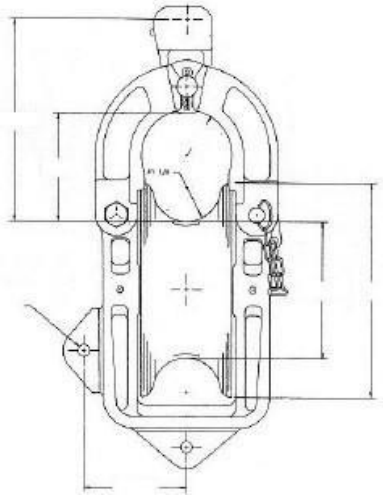

UB-1-A

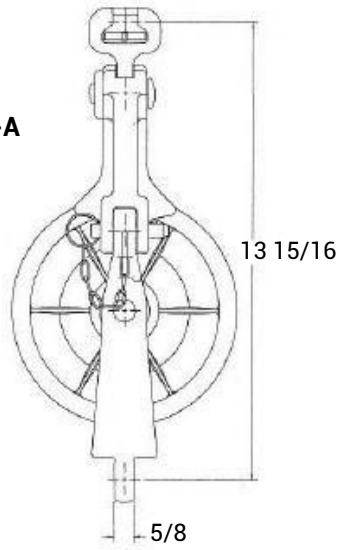

SPÉCIFICATION COMPLÈTE

			CHARGE MAXIMALE		POIDS DE LA POULIE	
NUMÉRO	DIAMÈTRE MAX. DU CONDUCTEUR	CHARGE DE TRAVAIL SÉCURITAIRE	SUSPENDUE	MONTÉE SUR TRAVERSE	SANS SUPPORT POUR TRAVERSE	AVEC SUPPORT POUR TRAVERSE
UB-1-A	2''	2 500 lbs	12 000 lbs	7 500 lbs	9.4 lbs	12.7 lbs
UB-1-A	51 mm	1 134 kg	5 440 kg	3 400 kg	4.3 kg	5.8 kg

DIAMÈTRE COMPLET

ÉPAULEMENT				ESPACEMENT		BAS DES CONDUCTEURS	
NUMÉRO	BAS DU DIAMÈTRE DE LA RAINURE	DIAMÈTRE EXTÉRIEUR	LARGEUR DE LA JANTE	LARGEUR	HAUTEUR	LIGNE CENTRE DE LA DOUILLE	SUPPORT DE TRAVERSE
UB-1-A	4-7/16''	7''	3''	3-1/8''	3-3/4''	6-1/2''	9-1/8''
UB-1-A	111 mm	178 mm	76 mm	79 mm	95 mm	165 mm	232 mm

HAUTEUR COMPLÈTE	CENTRE DU CONDUCTEUR AU CENTRE DU TROU DU MANCHON	LARGEUR COMPLÈTE		GRANDEUR MAX. SUPPORT DE TRAVERSE		PROFONDEUR TOTALE SUPPORT DE TRAVERSE	FOND DE RAYON DE RAINURE
		SUPPORT TRAVERSE	SUPPORT POULIE				
16''	3-3/8''	6''	8-1/8''	6-1/4''	5-3/4''	7-1/2''	1-1/16''
406 mm	86 mm	152 mm	206 mm	159 mm	146 mm	191 mm	33 mm

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

POULIE DE TIRAGE (suite)

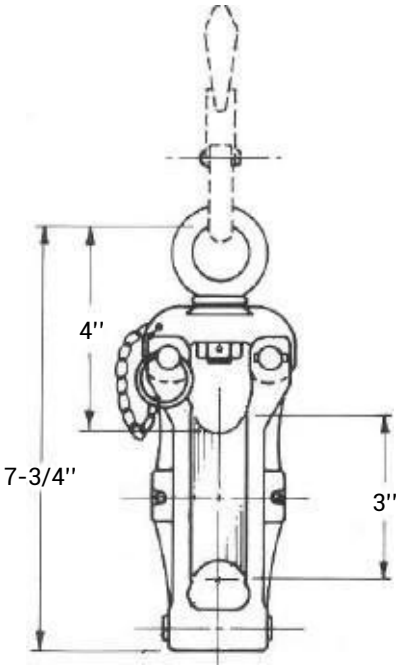

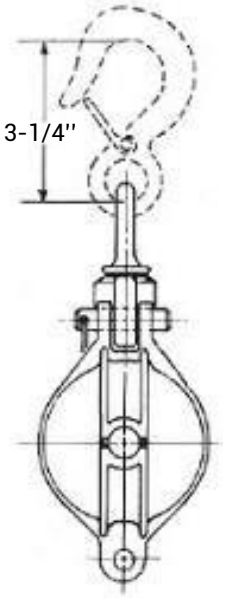





NUMÉRO	DESCRIPTION	POIDS EN ONCE
HLB-1250	Poulie-Ouverture au haut / Œil pivotant	31
HLB-1250-KH	Poulie-Ouverture au haut / Œil et crochet pivotant	37
HLB-1250-MH-1	Poulie-Ouverture au haut / Œil et crochet pivotant	37
HLB-1250-SH	Poulie-Ouverture au haut /Œil pivotant et crochet de sécurité	37
HLB-1250-DH	Poulie-Ouverture au haut / Œil et crochet pivotant	39
HLB-1250C	Poulie-Sans ouverture / Œil pivotant	31
HLB-1250C-KH	Poulie-Sans ouverture / Œil pivotant	37
HLB-1250C-MH	Poulie-Sans ouverture / Œil et crochet pivotant	37
HLB-1250C-SH	Poulie-Sans ouverture / Œil pivotant et crochet de sécurité	37
HLB-1250C-DH	Poulie-Sans ouverture / Œil et crochet pivotant	39

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

PINCE DE TIRAGE

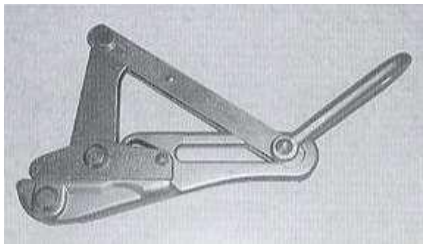
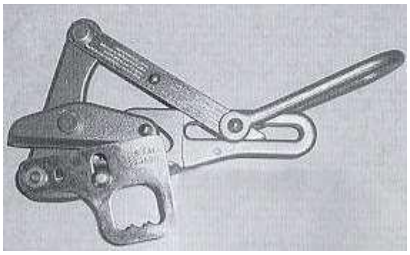
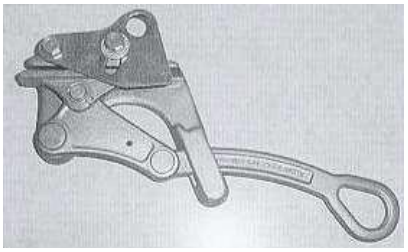

NUMÉRO	LONGUEUR MINIMUM DU FILS	LONGUEUR MAXIMUM DU FILS	LIMITE DE LA CHARGE DE TRAVAIL	POIDS
H1684-5	6 ACSR .218''	3/0 ACSR .55''	8000 lbs	6 ¼'' lbs
H1656-40	3/0 ACSR .53''	336.4 ACSR .741''	8000 lbs	7 ½'' lbs
H1656-50	397.5 ACSR .78''	477 ACSR .88''	8000 lbs	7 ½'' lbs
H1656-60	477 ACSR .86''	666.6 ACSR .96''	8000 lbs	7 ½'' lbs
H1685-20	.157''	.844''	4500 lbs	3 lbs
1685-31	.625''	1.250''	7500 lbs	5.2 lbs
H1613-40H	#10 SOL. .10''	1/0 STR. .373''	4500 lbs	3 ¼'' lbs
H1684-5H	6 ACSR .218''	3/0 ACSR .55''	8000 lbs	6 ¼''lbs
H1656-40H	3/0 ACSR .53''	336.4 ACSR .74''	8000 lbs	7 ¾'' lbs
H1656-50H	397.5 ACSR .78''	477 ACSR .88''	8000 lbs	7 ¾'' lbs
H1656-60H	477 ACSR .86''	666.6 ACSR .96''	8000 lbs	7 ¾'' lbs

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ

DÉTECTEUR DE TENSION

7701

2500

266

NUMÉRO	DESCRIPTION	POIDS
7701	Détecteur de tension	1.0 lbs
	C/A Étui	
2500	Adaptateur universel pour perche	3.25 lbs
266	Adaptateur pour traverse sous charge 15 et 25 kV. S'adapte aussi pour traverse 35 kV d'Elastimold.	4.02 lbs

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

SUPPORTS DIVERS

R-30-G

A30413

A30414

10-150

CAMERA MOUNTING INSULATED HOT STICK

- Modeled after the HASTINGS Tel-O-Pole series, this specially engineered hot stick allows for a GoPro™ Action Camera to be mounted and utilized for quick, easy, and safe inspection of and around energized lines, transformers, insulators, poles, buildings, bridges etc.
- Utility workers can use the camera to wirelessly stream and record live picture and video to the ground with any iPhone, tablet or android device compatible with the GoPro Application. The hot stick may even allow inspections to be completed without the use of a bucket truck, lift, or climbing gear.
- Lightweight
- Fiber Glass Stick Tested at 100,000 volts per foot
- Camera Assembly Tested up to 40,000 volts
- Extended 30' / Retracted 63.5"
- The camera mount adapter can be used in any position and is included with the R-30-G stick.
- The Clamp Claw Mount, sold separately, clamps to any hot stick.
- Camera Light, sold separately can be used on Camera Mounting Insulated Stick or the Clamp Claw Mount.
- Smart Phone Mount, sold separately, has adjustable strap to fit on most hot sticks.

CATALOG NUMBER	DESCRIPTION	LBS
R-30-G	Camera mount for hot stick	4.9
A30413	Smartphone mount	0.3
A30414	Clamp claw mount	0.6
10-150	Camera light	0.3
C-35	Carry case	0.7

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

SERVICE DE LABORATOIRE HAUT VOLTAGE

NOUS POUVONS TESTER ET CERTIFIER LES PRODUITS SUIVANTS :

- GANTS ET MANCHES ISOLÉS*
- TAPIS ET COUVERTURE ISOLANTS*
- COUVRE-CONDUCTEUR
- PERCHE VIVITECHNIQUE (HOT STICK)
- DÉTECTEUR DE TENSION
- ENSEMBLE DE MISE À LA TERRE (MALT & SHUNT)
- HARNAIS ET LONGE ANTI-CHUTE

SELON LES NORMES ASTMF496 CAN-ULC-60903, LES GANTS DOIVENT ÊTRE TESTÉS TOUS LES 6 MOIS ET LES PERCHES ISOLÉES À CHAQUE ANNÉE.

NOUS OFFRONS ÉGALEMENT :

- RÉPARATION ET NETTOYAGE DE VETEMENTS ARC FLASH
- FORMATION EN SÉCURITÉ

(800) 921-4400 / (819) 564-4410 / Fax : (819) 564-2227
info@limotrique.com
www.limotrique.com

LIMOTRIQUE
PUISSANCE // CONTRÔLE // SÉCURITÉ